


saxby
lighting

edition

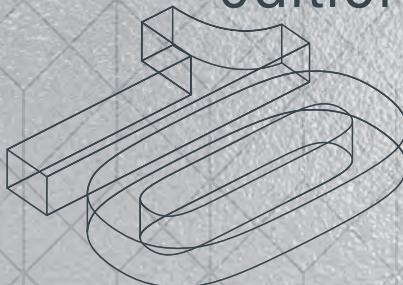

CATALOGUE

www.saxbylighting.com

315 NEW PRODUCTS & 458 FAVOURITES SAME GREAT VALUE NEXT DAY DELIVERY




Saxby Lighting are the lighting experts, who have been designing and manufacturing lights for commercial and domestic use for over 30 years.

We provide quality, choice, innovation and great service. We boast a team of lighting specialists, who offer a wealth of knowledge and can give advice and support whenever needed. By offering

industry leading warranties, technical support, a committed customer service team and marketing collateral, we strive to make it easy for customers to specify and install reliable and quality lighting.



Cert No 953-0MS-001
ISO 9001
ISO 14001



■ SAXBYSMART 08

■ RECESSED 12

 FIRE RATED 14

 DLIGHT 26

■ COMMERCIAL 42

 PANEL 44

 SUSPENSION 50

 BATTEN 54

 HIGH BAY 68

 LOW BAY 72

 BULKHEAD 74

 FLUSH 80

 TRACK 84

■ INTERIOR 94

 COLLECTION 96

 WALL 108

■ DISPLAY 118

 CABINET 120

 TAPE 124

■ BATHROOM 136

 SPOTLIGHT 138

 COLLECTION 140

 FLUSH 143

 MIRROR 146

 WALL 154

■ EXTERIOR 160

 COLLECTION 162

 WALL 186

 BOLLARD 206

 FLOODLIGHT 208

 BULKHEAD 214

 GUIDE 225

 DECKING 234

 GROUND 240

 SPIKE 245

■ EMERGENCY 248

 GUIDE 250

■ LAMP & ACC. 262

 LAMP 264

 TRANSFORMER 279

 DRIVER 280


 DIMMER 282

 SENSOR 283

■ TECHNICAL 288

PRODUCT DIRECTORY

RECESSED

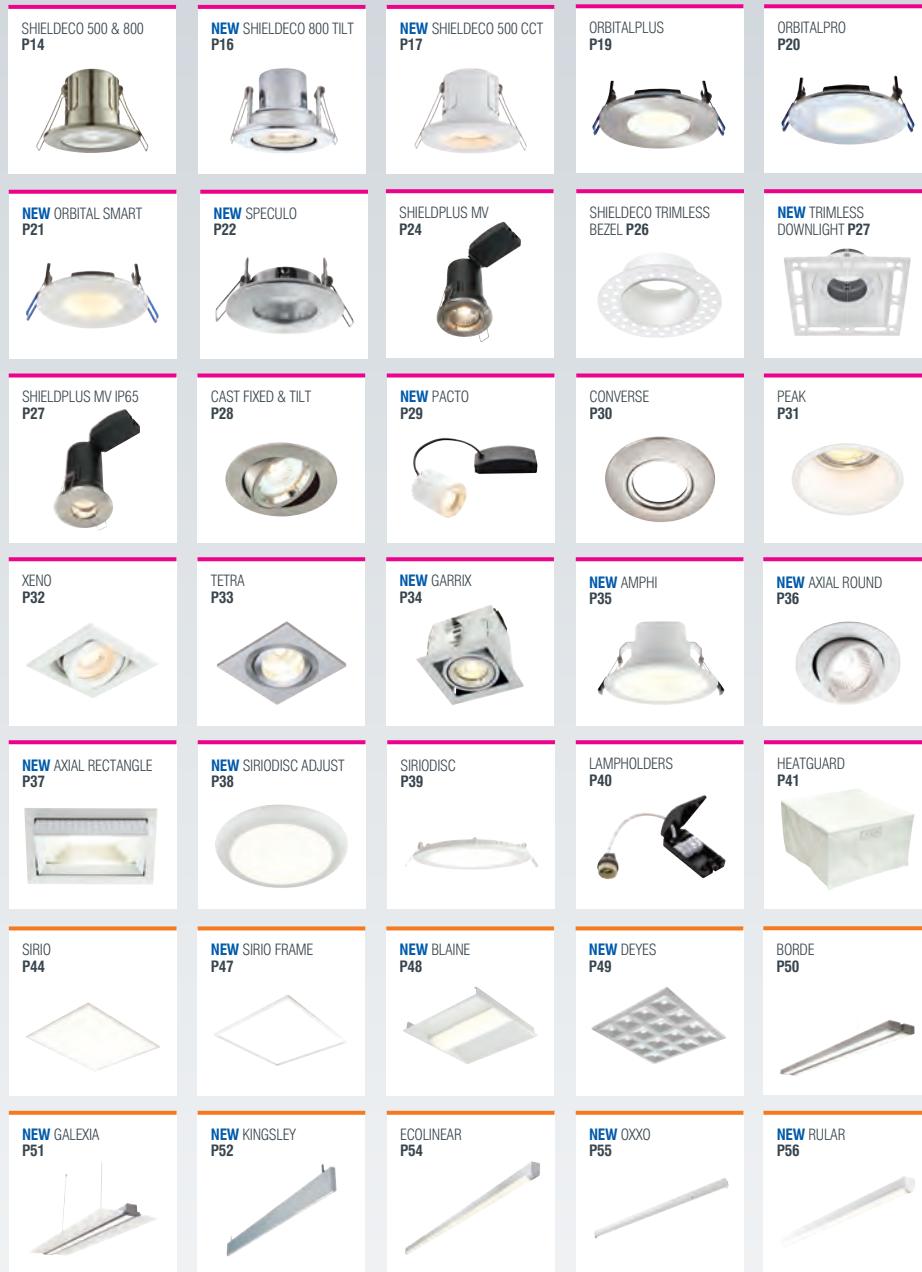

COMMERCIAL





INTERIOR

PRODUCT DIRECTORY

INTERIOR

DISPLAY

BATHROOM



BATHROOM

EXTERIOR

PRODUCT DIRECTORY

EXTERIOR



BIANCO
P189



DORON
P190



MORTI
P191



ORETI
P192



VULCAN
P193



NEW GLOVER
P194



ZYRA
P196



WARE
P197



NEW BRETON
P198



YORK
P199



INOVA PIR
P200



PAGODA PIR
P201



TRADITIONAL
P202



HALBURY
P203



BAYSWATER
P204



Evesham
P205



NEW ZONE
P206



NEW SCIMITAR
P208



NEW SURGE
P210



NEW MANTRA
P213



LUIK
P214



LUCCA
P216



NEW LUCCA MINI
P217



NEW SERAN
P218



MOTION LED PIR
P220



AVIT
P221



NEW PILLO
P222



NEW ROND
P224



NEW SEINA HALF BRICK
P225



NEW SEINA
P226



ECO
P228



SEVERUS
P230



NEW HESTER
P232



IKON PRO
P234



COVE
P238



HAYZ
P239



NEW BODENN
P240



NEW HOXTON
P241



PILLAR
P242



AYOKA
P244

EXTERIOR



LUMINATRA
P245



NEW LANCE
P246



OPAZ MV
P247



SIGHT PLUS
P250



SIGHT ECO
P251



SIGHT BOX
P252



SIGHT 4-IN-1
P253



SIGHT RECESSED
P254




KYLE
P255



NEW CYCLO2
P256



SIGHT TWIN SPOT IP65
P258



SIGHT TWIN SPOT
P259



EMERGENCY
CONVERSION KIT P260



NEW GU10 SMART
P264



LAMPS
P265



NEW E27 SMART
P274



TRANSFORMERS &
DRIVERS P279



DIMMER MODULE
P282



MICROWAVE & PIR
DETECTORS P283



RECESSED PIR
DETECTOR P284



PIR SECURITY DETECTOR
P285



TWILIGHT DETECTOR
P286



IP68 CONNECTORS
P287

EMERGENCY

LAMP & ACCESSORY

NEW
PRODUCT

INTELLIGENT LIGHTING
saxbysmart®

Intelligent lighting at your fingertips

Our new smart lighting range has built-in software that you can control remotely for an easier, efficient and personalised way of using your lights.

No need for a hub or complex installations. Simply download the SaxbySmart app to configure the lights your way, directly from your smartphone or using your own voice on smart home voice recognition products, such as Amazon Echo or Google Home.



“Alexa, turn on the lights”

SaxbySmart is compatible with Amazon Echo and Google Home allowing you to control the lights directly using your own voice.

WORKS WITH
amazon alexa

works with the
Google Assistant

How to get started:

- Install the SaxbySmart app.
- Register your account and add your lighting devices.
- You're good to go – create a personalised lighting experience for each room with SaxbySmart.

Available on the iPhone
App Store

ANDROID APP ON
Google play




Discover our smart lighting range




GU10 LAMP



E27 LAMP



FLUSH FITTING



RECESSED SPOT

Safe and secure

Military grade security for guaranteed peace of mind as your data is being handled safely.



INTELLIGENT LIGHTING
saxbysmart®

SAXBYSMART GU10 & E27 LAMPS

SaxbySmart allows you to switch on and off, dim or change the colour temperature of your lights - from 2700K to 6500K - using your own voice or the SaxbySmart app.

NEW
PRODUCT



“Hey Google,
brighten the living
room lights”



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|-----------------|------|-------------------|-----------|------|-----------------------|
| 79308 | GU10 Smart 4.5W | 2A | 4.5W LED GU10 CCT | 2700/6500 | 300 | 67 H: 72mm Dia: 50mm |
| 79309 | E27 Smart 10W | 2A | 10W LED E27 CCT | 2700/6500 | 800 | 80 H: 118mm Dia: 60mm |

See details: GU10 Smart page 264, E27 Smart page 274.

saxbysmart INTELLIGENT LIGHTING®

SAXBYSMART MONTANA & ORBITAL

NEW
PRODUCT



“Alexa, make
the light warmer”



“Hey Google,
change the light
to white”

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|-----------------------|------|--------------|-----------|------|--------------------------|
| 79307 | Montana Smart 15W | 3A | Satin nickel | 2700/6500 | 900 | 60 Proj: 70mm Dia: 330mm |
| 79306 | Montana Smart 15W | 2A | Gloss white | 2700/6500 | 900 | 60 Proj: 70mm Dia: 330mm |
| 79305 | Orbital Smart IP65 9W | 2A | Matt white | 3000/6000 | 450 | 50 Proj: 3mm Dia: 110mm |

See details: Montana Smart (also available in Satin Nickel) page 80, Orbital Smart page 20.

saxbysmart INTELLIGENT LIGHTING®

RECESSED

Recessed downlights are a subtle and interesting way to add a modern feel to your home. Saxby Lighting's recessed range covers all your domestic and commercial needs.

**FIRE RATED
DNGLIGHT**

14
26



SHIELDECO 500

The SHIELDECO is a revolutionary Fire Rated dimmable LED downlight in both performance and installation. Utilising the tool-less fast fix 4 way loop in loop out connection system, the whole product can be fully wired and installed in a matter of seconds. Available in 4w 500 lumen and 8.5w 820 lumen and in both fixed and tilt versions. Owing to its unique construction and heat dissipation the product can be covered directly with insulation when installed in the ceiling. Suitable for both domestic and commercial applications this IP65 range of downlights are available in white, satin nickel and polished chrome.



Can be covered with insulation



Trimless bezel on page 26



- Constructed from steel & acrylic
- 4W LED module (SMD)
- Trimless bezel accessories available, see page 26
- Compatible dimmer 75021 (150W), see page 282




| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS | | CUT OUT |
|-------|------------------|--------------|------|-----|------|------------|---------|-------------|
| 73785 | ShieldECO 500 4W | Matt white | 3000 | 500 | 125 | Proj: 3mm | D: 59mm | Dia: 81.5mm |
| 73786 | ShieldECO 500 4W | Matt white | 4000 | 500 | 125 | Proj: 3mm | D: 59mm | Dia: 81.5mm |
| 73787 | ShieldECO 500 4W | Satin nickel | 3000 | 500 | 125 | Proj: 3mm | D: 59mm | Dia: 81.5mm |
| 73788 | ShieldECO 500 4W | Satin nickel | 4000 | 500 | 125 | Proj: 3mm | D: 59mm | Dia: 81.5mm |
| 74031 | ShieldECO 500 4W | Chrome plate | 3000 | 500 | 125 | Proj: 3mm | D: 59mm | Dia: 81.5mm |
| 74032 | ShieldECO 500 4W | Chrome plate | 4000 | 500 | 125 | Proj: 3mm | D: 59mm | Dia: 81.5mm |

SHIELDECO 800


The SHIELDECO is a revolutionary Fire Rated dimmable LED downlight in both performance and installation. Utilising the tool-less fast fix 4 way loop in loop out connection system, the whole product can be fully wired and installed in a matter of seconds. Available in 4w 500 lumen and 8.5w 820 lumen and in both fixed and tilt versions. Owing to its unique construction and heat dissipation the product can be covered directly with insulation when installed in the ceiling. Suitable for both domestic and commercial applications this IP65 range of downlights are available in white, satin nickel and polished chrome.



Can be covered with insulation



Trimless bezel on page 26



- Constructed from steel & acrylic
- 8.5W LED module (SMD)
- Trimless bezel accessories available, see page 26
- Compatible dimmer 75021 (150W), see page 282




| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS | | CUT OUT |
|-------|--------------------|--------------|------|-----|------|------------|---------|-------------|
| 74707 | ShieldECO 800 8.5W | Matt white | 3000 | 750 | 88 | Proj: 3mm | D: 59mm | Dia: 81.5mm |
| 74708 | ShieldECO 800 8.5W | Matt white | 4000 | 820 | 96 | Proj: 3mm | D: 59mm | Dia: 81.5mm |
| 74709 | ShieldECO 800 8.5W | Satin nickel | 3000 | 750 | 88 | Proj: 3mm | D: 59mm | Dia: 81.5mm |
| 74710 | ShieldECO 800 8.5W | Satin nickel | 4000 | 820 | 96 | Proj: 3mm | D: 59mm | Dia: 81.5mm |
| 74711 | ShieldECO 800 8.5W | Chrome plate | 3000 | 750 | 88 | Proj: 3mm | D: 59mm | Dia: 81.5mm |
| 74712 | ShieldECO 800 8.5W | Chrome plate | 4000 | 820 | 96 | Proj: 3mm | D: 59mm | Dia: 81.5mm |

SHIELDECO 800 TILT

The SHIELDECO is a revolutionary Fire Rated dimmable LED downlight in both performance and installation. Utilising the tool-less fast fix 4 way loop in loop out connection system, the whole product can be fully wired and installed in a matter of seconds. Available in 4w 500 lumen and 8.5w 820 lumen and in both fixed and tilt versions. Owing to its unique construction and heat dissipation the product can be covered directly with insulation when installed in the ceiling. Suitable for both domestic and commercial applications this IP65 range of downlights are available in white, satin nickel and polished chrome.



Can be covered with insulation



- Constructed from steel & acrylic
- 8.5W LED module (SMD)
- Angle of tilt: 20°
- Compatible dimmer 75021 (150W), see page 282



| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS | | CUT OUT |
|-------|-------------------------|--------------|------|-----|------|--------------|---------|-----------|
| 78520 | ShieldECO 800 Tilt 8.5W | Matt white | 3000 | 750 | 88 | Proj: 3-15mm | D: 60mm | Dia: 85mm |
| 78521 | ShieldECO 800 Tilt 8.5W | Matt white | 4000 | 820 | 96 | Proj: 3-15mm | D: 60mm | Dia: 85mm |
| 78522 | ShieldECO 800 Tilt 8.5W | Satin nickel | 3000 | 750 | 88 | Proj: 3-15mm | D: 60mm | Dia: 85mm |
| 78523 | ShieldECO 800 Tilt 8.5W | Satin nickel | 4000 | 820 | 96 | Proj: 3-15mm | D: 60mm | Dia: 85mm |
| 78524 | ShieldECO 800 Tilt 8.5W | Chrome plate | 3000 | 750 | 88 | Proj: 3-15mm | D: 60mm | Dia: 85mm |
| 78525 | ShieldECO 800 Tilt 8.5W | Chrome plate | 4000 | 820 | 96 | Proj: 3-15mm | D: 60mm | Dia: 85mm |

SHIELDECO 500 CCT

The SHIELDECO CCT is a CCT Fire Rated dimmable LED downlight. Utilising the tool-less fast fix 4 way loop in loop out connection system, the whole product can be fully wired and installed in a matter of seconds. This CCT downlight has two colour temperatures, warm white and cool white, in one fitting. Just flick the switch on the back of the product to choose either 3000K or 4000K. Available in a 4w 500 lumen output this versatile IP65 downlight comes complete with three interchangeable bezels white, satin nickel and polished chrome. Owing to its unique construction and heat dissipation the product can be covered directly with insulation when installed in the ceiling.

SHIELDECO

NEW PRODUCT

FIRE RATED

CCT 3000/4000K

DIMMABLE

FAST FIX

3000K

4000K

Can be covered with insulation

Interchangeable bezels supplied

5

SMD

90min

IP65

80 CRI

60°

A

5

SMD

90min

IP65

80 CRI

60°

A

- Constructed from steel & acrylic
- 4W LED module (SMD) CCT
- Min void: 90mm
- Compatible dimmer 75021 (150W), see page 282

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS | | CUT OUT |
|-------|----------------------|-----------|-----|------|------------|---------|-------------|
| 78519 | ShieldECO 500 CCT 4W | 3000/4000 | 500 | 125 | Proj: 3mm | D: 64mm | Dia: 81.5mm |

ORBITAL RANGE



ORBITALPLUS

The OrbitalPlus family is a range of slimline recessed downlights which are fire rated and IP65 rated. It's anti glare dome projects up to 460 lumens of warm or cool white light. This unique and patented design can be covered with insulation and fits into shallow ceiling voids. Supplied with a dimmable Eaglerise driver, it is available with warm white or cool white LEDs and in three finishes, satin nickel, chrome and matt white.



- Constructed from die cast aluminium alloy & steel
- 9W LED module (SMD)
- Compatible dimmer 75021 (150W), see page 282
- For compatible emergency kit, see page 260/261



| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS | | CUT OUT |
|--------------|-------------|--------------|------|-----|------|------------|---------|------------|
| 69880 | OrbitalPLUS | Matt white | 3000 | 460 | 51 | Proj: 2mm | D: 42mm | Dia: 110mm |
| 69883 | OrbitalPLUS | Matt white | 5000 | 460 | 51 | Proj: 2mm | D: 42mm | Dia: 110mm |
| 69881 | OrbitalPLUS | Satin nickel | 3000 | 460 | 51 | Proj: 2mm | D: 42mm | Dia: 110mm |
| 69884 | OrbitalPLUS | Satin nickel | 5000 | 460 | 51 | Proj: 2mm | D: 42mm | Dia: 110mm |
| 69882 | OrbitalPLUS | Chrome plate | 3000 | 460 | 51 | Proj: 2mm | D: 42mm | Dia: 110mm |
| 69885 | OrbitalPLUS | Chrome plate | 5000 | 460 | 51 | Proj: 2mm | D: 42mm | Dia: 110mm |

ORBITALPRO

Using the latest in Colour Changing Technology (CCT), each OrbitalPRO can be warm white or cool white with a simple flick of a switch. The two sets of SMD LED modules project 450 - 990 lumens of indirect LED light from the unique anti-glare dome. The slim line, patented design is fire rated, IP65 rated and can be covered with insulation, whilst fitting into shallow ceiling voids. Supplied with a dimmable Eaglerise driver that works with leading and trailing edge dimmers. Fitted with a 4-way tool-less push fit terminal block for ease of install. Comes in a matt white finish.



| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS | |
|-------|----------------|--------|------------|-----------|------|------------|------------------------------|
| 71210 | OrbitalPRO CCT | A | Matt white | 3000/5000 | 450 | 50 | Proj: 3mm D: 42mm Dia: 110mm |
| 71512 | OrbitalPRO CCT | A | Matt white | 3000/5000 | 700 | 58 | Proj: 3mm D: 42mm Dia: 135mm |
| 71515 | OrbitalPRO CCT | A | Matt white | 3000/5000 | 990 | 66 | Proj: 3mm D: 45mm Dia: 165mm |

ORBITAL SMART


The Orbital Smart boasts two sets of SMD LED modules project 450 lumens of indirect LED light from the unique anti-glare dome. The slim line, patented design is fire rated, IP65 rated and can be covered with insulation, whilst fitting into shallow ceiling voids. Fitted with a push fit tool-less terminal block and male/female connector for ease of install. This smart fitting can all be controlled via the SaxbySmart app or using voice activation via Amazon Alexa or Google Home, allowing you ultimate control, whether it's changing colour temperature, dimming or switching on and off.



- Constructed from die cast aluminium alloy & steel
- 9W LED module (SMD) CCT

“Alexa, turn on the lights”

SaxbySmart is compatible with Amazon Echo and Google Home allowing you to control the lights directly using your own voice.

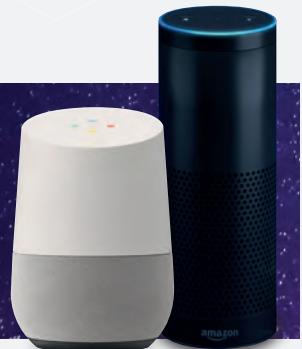

| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS | | CUT OUT |
|-------|---------------|------------|-----------|-----|------|-------------------|------------|----------|
| 79305 | Orbital Smart | Matt white | 3000/6000 | 450 | 50 | Proj: 3mm D: 42mm | Dia: 110mm | Dia 97mm |

SPECULO ROUND & SQUARE

The Speculo round and square is a range of compact fire rated downlights. The Speculo stands out for its low-profile design featuring an ultra slim (1mm) bezel, available in three finishes – Chrome, Satin Chrome and Matt White and an open back construction which allows improved airflow to the GU10 lamp reducing heat thereby improving lamp life and performance. The Speculo is IP65 and Fire Rated to 30, 60 and 90 minutes. Quick installation with the tool-less loop-in loop-out push fit terminal block. Suitable for use with GU10 lamps or our Pacto LED module (see page 29).



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | CUT OUT | MIN VOID |
|-------|------------------|----------------|-----------------|---------------------|-----------|----------|
| 79978 | Speculo (round) | Matt white | GU10 (required) | Proj: 1mm Dia: 85mm | Dia: 67mm | 120mm |
| 79979 | Speculo (round) | Brushed chrome | GU10 (required) | Proj: 1mm Dia: 85mm | Dia: 67mm | 120mm |
| 79980 | Speculo (round) | Chrome | GU10 (required) | Proj: 1mm Dia: 85mm | Dia: 67mm | 120mm |
| 80244 | Speculo (square) | Matt white | GU10 (required) | Proj: 1mm Sq: 85mm | Dia: 67mm | 120mm |
| 80245 | Speculo (square) | Brushed chrome | GU10 (required) | Proj: 1mm Sq: 85mm | Dia: 67mm | 120mm |
| 80246 | Speculo (square) | Chrome | GU10 (required) | Proj: 1mm Sq: 85mm | Dia: 67mm | 120mm |

SPECULO ANTI GLARE

The Speculo anti glare compact fire rated downlight stands out for its low-profile design featuring an ultra slim (1mm) bezel, available in two finishes – Matt Black and Matt White and an open back construction which allows improved airflow to the GU10 lamp reducing heat thereby improving lamp life and performance.

The Speculo is IP65 and Fire Rated to 30, 60 and 90 minutes. Quick installation with the tool-less loop-in loop-out push fit terminal block. Suitable for use with GU10 lamps or our Pacto LED module (see page 29).



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | CUT OUT | MIN VOID |
|-------|--------------------|------------|-----------------|-------------------|----------|----------|
| 80247 | Speculo anti-glare | Matt white | GU10 (required) | H: 60mm Dia: 85mm | Dia 75mm | 120mm |
| 80248 | Speculo anti-glare | Matt black | GU10 (required) | H: 60mm Dia: 85mm | Dia 75mm | 120mm |

SHIELDPLUS MV FIXED & TILT

Our ShieldPLUS range of fire rated downlights meets the BS requirements for 30, 60 and 90 minute ceilings and is resistant to the passage of sound. They feature the tool-less fast fix 4 way loop in loop out connection system, the whole product can be fully wired and installed in a matter of seconds. Available in both fixed, tilt and IP65 versions and in three finishes Matt White, Satin Nickel and Polished Chrome.



- Constructed from die cast aluminium alloy

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | CUT OUT |
|--------------|---------------------|--------------|-----------------|---|-----------|
| 61059 | ShieldPLUS MV fixed | Matt white | GU10 (required) | Proj: 4.5mm D: 120mm Dia: 85mm H: 120mm | Dia: 70mm |
| 50673 | ShieldPLUS MV fixed | Satin nickel | GU10 (required) | Proj: 4.5mm D: 120mm Dia: 85mm H: 120mm | Dia: 70mm |
| 50674 | ShieldPLUS MV fixed | Chrome plate | GU10 (required) | Proj: 4.5mm D: 120mm Dia: 85mm H: 120mm | Dia: 70mm |
| 61060 | ShieldPLUS MV tilt | Matt white | GU10 (required) | Proj: 5mm D: 130mm Dia: 100mm H: 130mm | Dia: 83mm |
| 50681 | ShieldPLUS MV tilt | Satin nickel | GU10 (required) | Proj: 5mm D: 130mm Dia: 100mm H: 130mm | Dia: 83mm |
| 50682 | ShieldPLUS MV tilt | Chrome plate | GU10 (required) | Proj: 5mm D: 130mm Dia: 100mm H: 130mm | Dia: 83mm |

SHIELDPLUS MV

Our ShieldPLUS range of fire rated downlights meets the BS requirements for 30, 60 and 90 minute ceilings and is resistant to the passage of sound. They feature the tool-less fast fix 4 way loop in loop out connection system, the whole product can be fully wired and installed in a matter of seconds. Available in both fixed, tilt and IP65 versions and in three finishes Matt White, Satin Nickel and Polished Chrome.



- Constructed from die cast aluminium alloy & glass

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | CUT OUT |
|--------------|--------------------|--------------|-----------------|---------------------------------------|-----------|
| 61061 | ShieldPLUS MV IP65 | Matt white | GU10 (required) | Proj: 5mm D: 130mm Dia: 88mm H: 130mm | Dia: 73mm |
| 50688 | ShieldPLUS MV IP65 | Satin nickel | GU10 (required) | Proj: 5mm D: 130mm Dia: 88mm H: 130mm | Dia: 73mm |
| 50686 | ShieldPLUS MV IP65 | Chrome plate | GU10 (required) | Proj: 5mm D: 130mm Dia: 88mm H: 130mm | Dia: 73mm |

SHIELDECO TRIMLESS BEZEL

These Trimless bezel accessories conceal the ShieldECO downlight. This creates a clean, seamless finish. Designed to be plastered into the ceiling during the early stages of a build, allowing the ShieldECO to be effortlessly fitted later.



Round and square options available



• Constructed from steel

| CODE | DESCRIPTION | FINISH | DIMENSIONS | CUT OUT | MIN VOID |
|-------|-----------------------|------------|--------------------|---------------|----------|
| 75917 | Trimless bezel round | Matt white | H: 40mm Dia: 135mm | Dia: 85mm | 150mm |
| 78529 | Trimless bezel square | Matt white | H: 40mm Dia: 135mm | Sq: 89 x 89mm | 150mm |

TRIMLESS DOWNLIGHT

The Trimless plaster-in downlight conceals the downlight for a clean, seamless finish. Designed to be plastered into the ceiling during the early stages of a build, allowing for the GU10 or our Pacto LED module (see page 29) to be fitted later. Square and round versions are available.



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | CUT OUT | MIN VOID |
|-------|---------------------------|------------|-----------------|-----------------------|-----------|----------|
| 78954 | Trimless downlight round | Matt white | GU10 (required) | Proj: 55mm Dia: 120mm | Dia: 81mm | 130mm |
| 78955 | Trimless downlight square | Matt white | GU10 (required) | Proj: 55mm Sq: 122mm | Sq: 85mm | 130mm |

A popular range of recessed downlight fittings, ideal and ready for dimmable GU10 LED lamps. Use for general, accent and display lighting. The Cast range has a choice of finishes and fixed or tilt lamp holders.



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | MIN VOID | CUT OUT |
|--------------|-------------|--------------|-----------------|---------------------|----------|-----------|
| 76006 | Cast fixed | Matt white | GU10 (required) | Proj: 3mm Dia: 80mm | 95mm | Dia: 70mm |
| 52331 | Cast fixed | Gloss white | GU10 (required) | Proj: 3mm Dia: 80mm | 95mm | Dia: 70mm |
| 52330 | Cast fixed | Satin nickel | GU10 (required) | Proj: 3mm Dia: 80mm | 95mm | Dia: 70mm |
| 52329 | Cast fixed | Chrome plate | GU10 (required) | Proj: 3mm Dia: 80mm | 95mm | Dia: 70mm |
| 76007 | Cast tilt | Matt white | GU10 (required) | Proj: 3mm Dia: 95mm | 110mm | Dia: 80mm |
| 52334 | Cast tilt | Gloss white | GU10 (required) | Proj: 3mm Dia: 95mm | 110mm | Dia: 80mm |
| 52333 | Cast tilt | Satin nickel | GU10 (required) | Proj: 3mm Dia: 95mm | 110mm | Dia: 80mm |
| 52332 | Cast tilt | Chrome plate | GU10 (required) | Proj: 3mm Dia: 95mm | 110mm | Dia: 80mm |

Small and compact, with a warm or cool white, high lumen output. This high performance LED module delivers 950 lumens. Comes pre-wired with our tool-less fast fix 4 way loop in loop out connection system, the whole product can be fully wired and installed in a matter of seconds and can be used with the Cast, Tetra, Garrix, Speculo and Trimless downlights.

• Constructed from die cast aluminium alloy & acrylic

• Compatible dimmer 75021 (150W), see page 282

Shown with our Cast fixed fitting

| CODE | DESCRIPTION | FINISH | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|-------------|------------|----------------------|------|-----|------|-------------------|
| 78485 | Pacto 10W | Matt white | 10W LED module (SMD) | 3000 | 930 | 93 | H: 59mm Dia: 50mm |
| 78486 | Pacto 10W | Matt white | 10W LED module (SMD) | 4000 | 950 | 95 | H: 59mm Dia: 50mm |

NEW PRODUCT

UP TO 950 LUMEN

DIMMABLE

FAST FIX

CONVERSE

The Converse is a bezel converter designed to replace older incandescent downlights with a large aperture left from previous installations. A choice of finishes are available.



- Constructed from steel

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | CUT OUT | MIN VOID |
|-------|----------------|--------------|-----------------|-----------------------|----------------|----------|
| 70417 | Converse bezel | Matt white | GU10 (required) | Proj: 14mm Dia: 140mm | Dia: 65 -125mm | 150mm |
| 52485 | Converse bezel | Satin nickel | GU10 (required) | Proj: 14mm Dia: 140mm | Dia: 65 -125mm | 150mm |
| 70418 | Converse bezel | Chrome plate | GU10 (required) | Proj: 14mm Dia: 140mm | Dia: 65 -125mm | 150mm |

PEAKE

The Peake is an anti-glare downlight which is ideally suited for use in commercial applications where lighting is required without the lamp source being seen.



- Constructed from steel

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | CUT OUT | MIN VOID |
|-------|-------------|-------------|-----------------|---------------------|-----------|----------|
| 48869 | Peake | Gloss white | GU10 (required) | Proj: 2mm Dia: 84mm | Dia: 75mm | 150mm |

XENO

Recessed boxed downlights providing a high degree of adjustability to ensure precise light placement. Each Xeno has a 30° angle of tilt and can rotate 355°. Ideal and ready for GU10 dimmable LED lamps. Available in a matt white or aluminium finish.



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | CUT OUT | MIN VOID |
|--------------|-------------|------------|---------------------|----------------------------|------------|----------|
| 78530 | Xeno single | Matt white | GU10 (required) | Proj: 3mm Sq: 90mm | 76 x 76mm | 150mm |
| 78531 | Xeno twin | Matt white | 2 x GU10 (required) | Proj: 3mm L: 180mm W: 90mm | 79 x 168mm | 150mm |
| 78532 | Xeno triple | Matt white | 3 x GU10 (required) | Proj: 3mm L: 270mm W: 90mm | 79 x 258mm | 150mm |
| 52407 | Xeno single | Aluminium | GU10 (required) | Proj: 3mm Sq: 90mm | 76 x 76mm | 150mm |
| 52408 | Xeno twin | Aluminium | 2 x GU10 (required) | Proj: 3mm L: 180mm W: 90mm | 79 x 168mm | 150mm |
| 52409 | Xeno triple | Aluminium | 3 x GU10 (required) | Proj: 3mm L: 270mm W: 90mm | 79 x 258mm | 150mm |

TETRA

High quality product. Made with aluminium alloy and boasting a slim and sleek profile system, the Tetra is a durable fitting. Ideal and ready for GU10 dimmable LED lamps or our Pacto module (see page 29) which can be fitted easily and simply. Available in three options.



GARRIX

The Garrix is a range of recessed boxed multiple downlights. They are adjustable on two axes for specific light control. Ideal for use with GU10 LED lamps or the Pacto LED module. Available in single or twin versions with Matt White or Satin Silver finish.

NEW
PRODUCT

78533



78535



78536



- Constructed from steel & die cast aluminium alloy

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | CUT OUT | TIPT |
|-------|---------------|------------|-----------------|----------------------------|-----------------|------|
| 78533 | Garrix single | Matt white | GU10 (required) | D: 103mm Sq: 110mm | Sq: 100 x 100mm | 20° |
| 78534 | Garrix twin | Matt white | GU10 (required) | D: 103mm L: 205mm W: 110mm | 190 x 100mm | 20° |
| 78535 | Garrix single | Silver | GU10 (required) | D: 103mm Sq: 110mm | Sq: 100 x 100mm | 20° |
| 78536 | Garrix twin | Silver | GU10 (required) | D: 103mm L: 205mm W: 110mm | 190 x 100mm | 20° |

AMPHI

The Amphi LED downlight is an ideal replacement for compact fluorescent offering running cost savings of up to 60% against fluorescent installations, the perfect choice for lighting up commercial spaces on a budget. Designed to retrofit/match ceiling cut outs of common compact fluorescent downlights. This adaptable and multifunctional fitting boasts a high lumen output and has a neutral white finish to fit in with an array of styles.

NEW
PRODUCT

UP TO
2500
LUMENS

BUILT-IN
DRIVER

ANTI
GLARE



- Constructed from aluminium alloy
- Matt white finish



174mm 230mm

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | CUT OUT |
|-------|-------------|----------------------|------|------|------|-------------------------------|------------|
| 78543 | Amphi | 18W LED module (SMD) | 4000 | 1800 | 100 | Proj: 3mm D: 100mm Dia: 174mm | Dia: 153mm |
| 78544 | Amphi | 25W LED module (SMD) | 4000 | 2500 | 100 | Proj: 3mm D: 130mm Dia: 230mm | Dia: 205mm |

AXIAL ROUND

The Axial is a range of high performance recessed LED adjustable wallwashers. Ideal for commercial/retail applications, this LED technology results in low power consumption when compared to classic CDM light sources. Reliable constant colour rendering and high lumen output. Energy efficient providing cost savings and low-cost long-term maintenance. Features include 60° adjustable tilt. Supplied complete with Eaglerise Driver. Available in round three sizes and rectangle.




NEW
PRODUCT

ADJUSTABLE



• Constructed from die cast aluminium alloy & clear glass
• Matt white finish
• Rotation: 355°



90mm 102mm 140mm

CODE

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | MIN VOID | CUT OUT | TILT |
|-------|-------------|----------------------|------|------|------|------------------------|----------|------------|------|
| 78537 | Axial round | 9W LED module (COB) | 4000 | 750 | 83 | Proj: 75mm Dia: 90mm | 75mm | Dia: 77mm | 60° |
| 78538 | Axial round | 15W LED module (COB) | 4000 | 1200 | 80 | Proj: 92mm Dia: 102mm | 75mm | Dia: 90mm | 60° |
| 78540 | Axial round | 30W LED module (COB) | 4000 | 2800 | 93 | Proj: 125mm Dia: 140mm | 75mm | Dia: 125mm | 60° |

CODE

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS | MIN VOID | CUT OUT | TILT |
|-------|-----------------------|------|------|------|-------------------------------|----------|-------------|------|
| 78542 | Axial rectangular 35W | 4000 | 3000 | 86 | Proj: 108mm L: 232mm W: 146mm | 108mm | 130 x 220mm | 90° |

AXIAL RECTANGULAR

The Axial is a range of high performance recessed LED adjustable wallwashers. Ideal for commercial/retail applications, this LED technology results in low power consumption when compared to classic CDM light sources. Reliable constant colour rendering and high lumen output. Energy efficient providing cost savings and low-cost long-term maintenance. Features include 60° adjustable tilt. Supplied complete with Eaglerise Driver. Available in round three sizes and rectangle.




NEW
PRODUCT

ADJUSTABLE



• Constructed from die cast aluminium alloy & clear glass
• Matt white finish
• 35W LED module (COB)

CODE

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS | MIN VOID | CUT OUT | TILT |
|-------|-----------------------|------|------|------|-------------------------------|----------|-------------|------|
| 78542 | Axial rectangular 35W | 4000 | 3000 | 86 | Proj: 108mm L: 232mm W: 146mm | 108mm | 130 x 220mm | 90° |

SIRIODISC ADJUSTABLE

The SirioDISC Adjustable is a versatile recessed or surface mounted LED luminaire. The ultra slim profile can be placed into the slimmest of ceiling voids and boasts a unique configurable bracket allowing for installation into cut-out sizes from 65mm to 205mm. The edge lit technology and high power SMD LEDs offer an even, superior light output, with no dark spots and reduced glare. The SirioDisc Adjustable's unique design allows the contractor to stock one universal luminaire suitable for both recessed and surface applications ideal for residential and commercial projects.




- Constructed from polycarbonate & polystyrene
- Textured matt white finish
- 18W LED module (SMD)



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS | MIN VOID | CUT OUT |
|-------|--------------------------|------|------|------|--------------------|----------|---------------|
| 78541 | SirioDISC Adjustable 18W | 4000 | 1450 | 81 | H: 15mm Dia: 230mm | 15mm | Dia: 65-205mm |

SIRIODISC

Our SirioDISC range complements our Sirio panel making it an ideal choice for office and corridor applications. The 20mm ultra slim profile can fit into the slimmest of voids. The edge lit technology and high power SMD LEDs offer an even, superior light output, with no dark spots and reduced glare. Quick and easy to install into shallow ceilings with a simple jack plug which connects the SirioDISC and driver. A choice of lumens and sizes are available in warm white or cool white. Options also include standard and emergency versions.

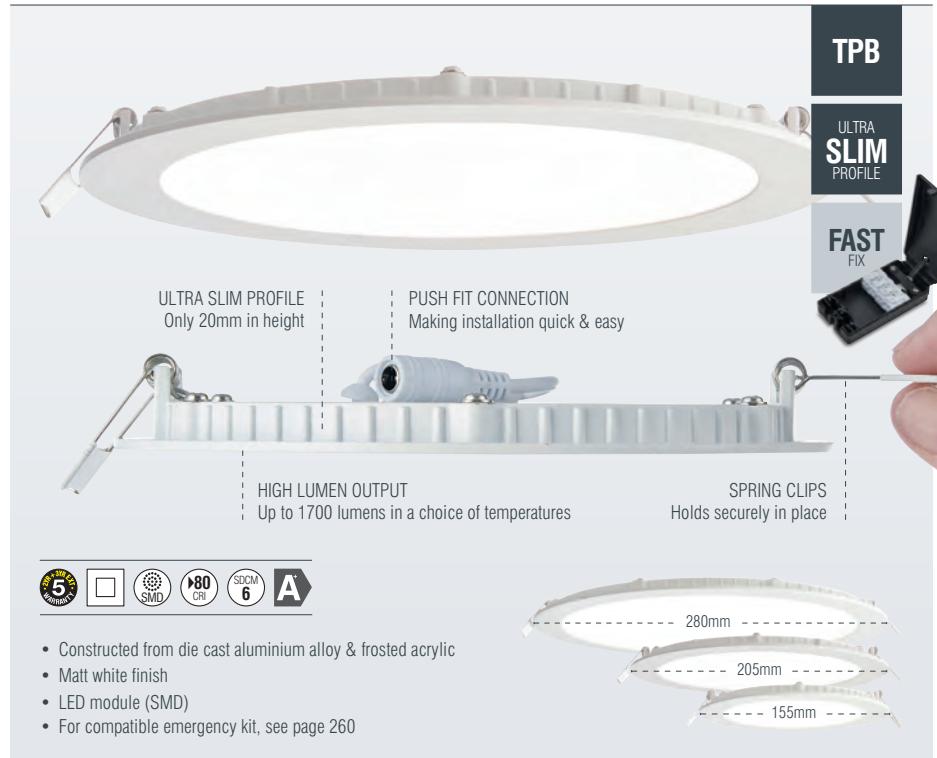

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS | CUT OUT |
|-------|-----------------------------------|------|------|------|------------------------------|------------|
| 73811 | SirioDISC 12W | 3000 | 720 | 60 | Proj: 3mm Dia: 170mm H: 20mm | Dia: 155mm |
| 73719 | SirioDISC 12W | 4000 | 780 | 65 | Proj: 3mm Dia: 170mm H: 20mm | Dia: 155mm |
| 73812 | SirioDISC 18W | 3000 | 1150 | 64 | Proj: 3mm Dia: 225mm H: 20mm | Dia: 205mm |
| 73720 | SirioDISC 18W | 4000 | 1200 | 67 | Proj: 3mm Dia: 225mm H: 20mm | Dia: 205mm |
| 73813 | SirioDISC 24W | 3000 | 1600 | 67 | Proj: 3mm Dia: 300mm H: 20mm | Dia: 280mm |
| 73810 | SirioDISC 24W | 4000 | 1700 | 71 | Proj: 3mm Dia: 300mm H: 20mm | Dia: 280mm |
| 54759 | Emergency LED conversion kit EMST | | | | H: 30mm W: 43mm L: 180mm | |



| CODE | DESCRIPTION | DIMENSIONS |
|---------------|--------------------------------|--------------------------|
| LHGU10 | GU10 lampholder 50W | H: 88mm W: 25mm L: 185mm |
| LHGU53 | MR16 lampholder 50W | H: 15mm W: 15mm L: 160mm |
| 78263 | GU10 lampholder & fast fix box | H: 30mm W: 45mm L: 240mm |

Intumescent downlight hoods restore the integrity required by British Standards and building regulations. The fireguards can be easily installed from below or above the ceiling and are certified to British Standards for all types of ceilings. These items can be used with most of our downlights.



- Constructed from fireproof fabric
- Round and square options available

| CODE | DESCRIPTION | DIMENSIONS | MIN VOID |
|--------------|---------------------------|---------------------|----------|
| FH150 | Heatguard small (round) | H: 150mm Dia: 150mm | 165mm |
| 50005 | Heatguard medium (square) | H: 250mm Sq: 250mm | 165mm |
| 50006 | Heatguard large (square) | H: 210mm Sq: 350mm | 165mm |


COMMERCIAL

From complex high bays, to budget battens, Saxby Lighting has it all. We have a wide selection of commercial fittings that are ideal for working environments, whether it's a warehouse or an office, Saxby Lighting has the solution.


| | |
|------------|----|
| PANEL | 44 |
| SUSPENSION | 50 |
| BATTEN | 54 |
| HIGH BAY | 68 |
| LOW BAY | 72 |
| BULKHEAD | 74 |
| FLUSH | 80 |
| TRACK | 84 |



The Sirio range of edge-lit LED panels offers a range of options to suit a variety of installation requirements. Utilising flicker-free LED drivers, high quality light guides and producing up to 100lm/w comes complete with 5 year warranty. The Sirio range offers superior light distribution and proven reliability. Available in 36W, 40W or 60W LED versions and up to 6000 lumen output. The Sirio range is available in a choice of daylight, cool or warm white and as standard or emergency. Surface mount and suspension kit are available.

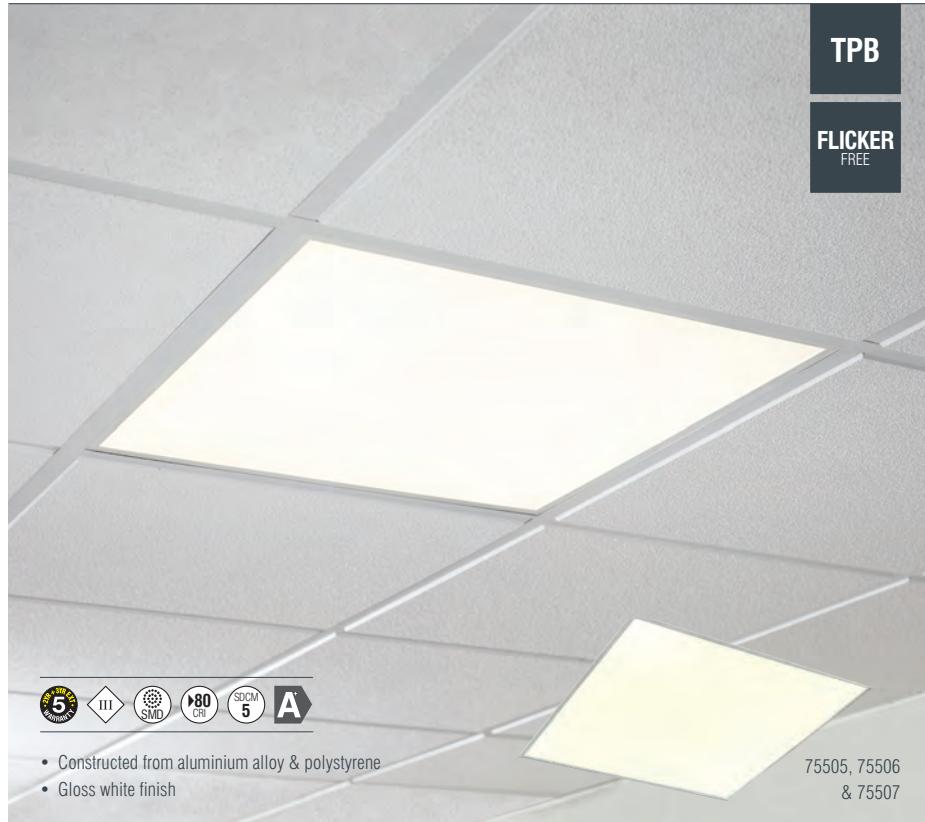

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|-------------|----------------------|------|------|------|----------------------------|
| 75505 | Sirio 40W | 40W LED module (SMD) | 3000 | 3250 | 81 | Sq: 595mm H: 8mm |
| 75506 | Sirio 40W | 40W LED module (SMD) | 4000 | 3400 | 85 | Sq: 595mm H: 8mm |
| 75507 | Sirio 40W | 40W LED module (SMD) | 6000 | 3400 | 85 | Sq: 595mm H: 8mm |
| 75509 | Sirio 60W | 60W LED module (SMD) | 4000 | 6000 | 100 | L: 1195mm W: 595mm H: 10mm |
| 80513 | Sirio 60W | 60W LED module (SMD) | 6000 | 6000 | 100 | L: 1195mm W: 595mm H: 10mm |
| 75512 | Sirio 40W | 40W LED module (SMD) | 4000 | 3400 | 85 | L: 1195mm W: 295mm H: 10mm |
| 75515 | Sirio 40W | 40W LED module (SMD) | 4000 | 3400 | 85 | L: 1195mm W: 145mm H: 10mm |

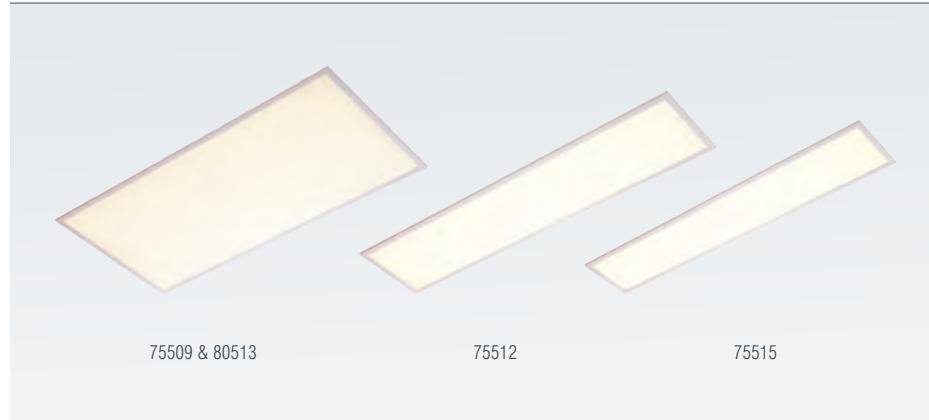

LED DRIVER & EMERGENCY LED CONVERSION KIT

Add full control and dimming ability to your Sirio panels by adding in this driver, which uses the Digital Addressable Lighting Interface (DALI) standard and 1-10V dimming options. You will be able to simply and easily control the exact light output from your LED panel dimming from 1% to 100% in a seamless way.



- For full details about the Emergency LED conversion kits, please see pages 260/261

| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|--------------|--|---------------------------|--------------------------|
| 75145 | LED driver constant current DALI, 1-10V Dimmable | White ABS plastic | H: 24mm W: 79mm L: 123mm |
| 54759 | Emergency LED conversion kit EMST (40W version) | Gloss white polycarbonate | H: 30mm W: 43mm L: 180mm |
| 75486 | Emergency LED conversion kit EMST (60W version) | Gloss white polycarbonate | H: 30mm W: 43mm L: 200mm |

SIRIO ACCESSORIES

Adjustable suspension and surface mount kits for use with our Sirio ceiling panel. Designed for environments that do not have a T-Bar ceiling, but can still benefit from the Sirio's excellent low maintenance and running costs. 4 steel cables required for 595 x 595mm panels and 6 steel cables required for 1195mm panels.

75518




75519



75520



75521




YEAR
2
WARRANTY

| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|-------|--|-------------|-----------------------------------|
| 75518 | Sirio suspension Kit (4 strings) | Bright zinc | L: 200-1000mm |
| 75519 | Sirio surface mount kit for 75505, 75506 & 75507 | Gloss white | Proj: 43mm Sq: 600mm |
| 75520 | Sirio surface mount kit for 75509 & 80513 | Gloss white | Proj: 43mm W: 600mm L: 1200mm |
| 75521 | Sirio surface mount kit for 75512 & 75515 | Gloss white | Proj: 43mm W: 150-300mm L: 1200mm |

SIRIO FRAME

The Sirio Frame is an innovative luminaire providing a decorative frame of light. The square panel outline designed for the ceiling, illuminates an indoor space just as effectively as the more common full panel. The fire barrier is maintained as the ceiling tile is in place. It offers a high lumen output of 3600 lumens and a longer life span as there is no discolouring concern, but still with a beam angle of 120°. Ideal for commercial applications.

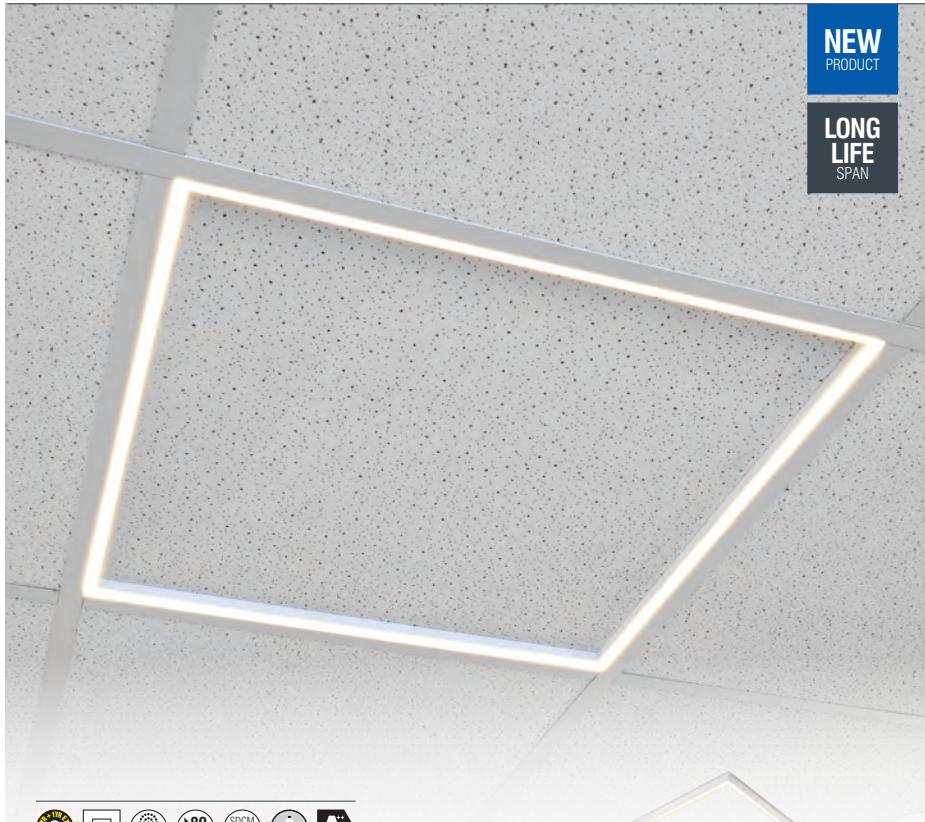

- Constructed from aluminium alloy & opal polycarbonate
- Gloss white finish
- 40W LED module (SMD)
- Emergency LED conversion kit available, see page 260



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|-----------------------------------|------|------|------|--------------------------|
| 78546 | Sirio frame 40W | 4000 | 3600 | 90 | Sq: 590mm H: 18mm |
| 54759 | Emergency LED conversion kit EMST | | | | H: 30mm W: 43mm L: 180mm |

The Blaine is a UGR19 LED recessed module and is designed to produce direct and indirect light reducing glare and enhancing visual comfort, suitable for T bar ceiling systems and comes in a neutral matt white finish. The 4000K LEDs emit a clear, bright light which perfect for any modern office or retail environment, with high lumen output of 4700 lumens. Emergency version available.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | MIN VOID |
|--------------|-------------|----------------------|------|------|------|-------------------|----------|
| 78483 | Blaine | 42W LED module (SMD) | 4000 | 4700 | 112 | Sq: 595mm H: 66mm | 66mm |
| 80085 | Blaine EM | 42W LED module (SMD) | 4000 | 4700 | 112 | Sq: 595mm H: 66mm | 66mm |

The Deyes recessed LED panel is constructed with a special grille design that keeps glare and discomfort to a minimum. It is both UGR13 and boasts a high lumen output of 115lm per watt. The Deyes will directly replace T5 and T8 fluorescent luminaires and is an ideal solution for offices, schools and other commercial applications. Available in 3 Hour Emergency option.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|-------------|----------------------|------|------|------|-------------------|
| 78547 | Deyes 30W | 30W LED module (SMD) | 4000 | 3450 | 115 | Sq: 595mm H: 20mm |
| 80086 | Deyes EM | 30W LED module (SMD) | 4000 | 3450 | 115 | Sq: 595mm H: 20mm |

BORDE

The Borde LED fitting has a sleek and simple design and is available in single and twin options; with up to 2900 lumen output, it is suitable for use in offices, meeting rooms and corridors. Adjustable in height, this is a low energy yet high light output fitting.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|--------------|--------------------------|------|------|------|----------------------------------|
| 59995 | Borde single | 26W LED module (SMD) | 4000 | 1450 | 56 | H: 200-1500mm L: 1494mm W: 68mm |
| 59996 | Borde twin | 2 x 26W LED module (SMD) | 4000 | 2900 | 56 | H: 200-1500mm L: 1494mm W: 156mm |

GALEXIA

Contemporary and unique in design, the Galexia adds visual appeal to any modern office space; a high-quality luminaire that complements almost any work environment. With exceptional energy efficiency from 100 lm/W. This office lighting LED solution offers high output diffused lighting which distributes light evenly making it a perfect choice for linear LED office lighting. This flicker free pendant is easily installed with a twin drop suspension point making this an elegant and easy to install pendant luminaire.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|--------------|-------------|------|------|------|---------------------------------|
| 78977 | Galexia 40W | 4000 | 4000 | 100 | H: 65-1500mm L: 1210mm W: 319mm |

The Kinglsey can operate as a single lighting unit or in a seamless run of continuous, energy efficient lighting conjoined. For a straight run it can be connected easily using the straight connector included or create angles using the angle accessory. It is a seemingly simple architectural profile luminaire, forming a thin line of continuous light popular with architects and designers. The Kingsley is the ultimate performance driven slim linear profile. Thanks to its superb build quality, excellent performance.



| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS | |
|--------------|----------------------------|-----------------|------|------|------|----------------|--------------------|
| 78978 | Kingsley 40W | Silver anodised | 4000 | 3400 | 85 | H: 94.2-1500mm | W: 20mm D: 1498mm |
| 79191 | Kingsley connect accessory | Silver anodised | | | | D: 130mm | W: 130mm H: 94.2mm |



ECOLINEAR

A direct LED replacement for 35W T5 fittings. The EcoLinear 5ft batten is instant on and flicker free, with each unit supplying 2500 lumens of even and bright cool white light and only using 22W whilst offering a 140° beam angle. The EcoLinear also benefits from an easy and quick installation with the use of the supplied suspension clips to aid with installation. Super slim casing with improved thermal management due to its aluminium extrusion.

FLICKER
FREE



- Constructed from polycarbonate & aluminium alloy
- Matt white finish



Suspension clips for easy installation

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | | |
|-------|-------------|----------------------|------|------|------|------------|-----------|---------|
| 73534 | EcoLinear | 22W LED module (SMD) | 4000 | 2500 | 114 | Proj: 46mm | L: 1500mm | W: 29mm |

OXXO IP20

The Oxo is a range of LED tube ready battens available in 4ft, 5ft and 6ft in both single and twin versions. The Oxo is supplied pre-wired (for use with dedicated T8 LED tubes tube not included) with a double end supply making for easy installation.

Shown with LED tubes - sold separately

NEW
PRODUCT

DOUBLE
END
SUPPLY



- Constructed from steel
- Compatible with Microwave presence detector 73352, see page 66

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | | |
|-------|---------------------|-----------------------------|---------------|------|------|------------|-----------|-----------|
| 78548 | Oxo 4ft single IP20 | 4ft LED tube (required) | | | | H: 53mm | W: 74mm | D: 1228mm |
| 78549 | Oxo 5ft single IP20 | 5ft LED tube (required) | | | | H: 53mm | W: 74mm | D: 1528mm |
| 78550 | Oxo 6ft single IP20 | 6ft LED tube (required) | | | | H: 53mm | W: 74mm | D: 1792mm |
| 78551 | Oxo 4ft twin IP20 | 2 x 4ft LED tube (required) | | | | H: 79mm | W: 103mm | D: 1228mm |
| 78552 | Oxo 5ft twin IP20 | 2 x 5ft LED tube (required) | | | | H: 79mm | W: 103mm | D: 1528mm |
| 78553 | Oxo 6ft twin IP20 | 2 x 6ft LED tube (required) | | | | H: 79mm | W: 103mm | D: 1792mm |
| 78956 | LED Tube 4ft 18W | A | 18W LED (SMD) | 4000 | 2000 | 111 | L: 1200mm | Dia: 26mm |
| 78957 | LED Tube 5ft 23W | A | 23W LED (SMD) | 4000 | 2500 | 109 | L: 1500mm | Dia: 26mm |

RULAR

The Rular offers a direct replacement for the standard T8 fluorescent batten and has been designed with the installer in mind, the simple clip on diffuser combined with the loop in loop out push fit terminals as well as BESA entry points and knockouts make it incredibly fast and simple to install. Comes with a 5 year warranty as standard. Using the latest LED technology coupled with high performance light diffusion materials to eliminate LED spots. The Rular is available in 4ft, 5ft and 6ft in both standard and high lumen output. Also available in 3 hour emergency option.



| CODE | DESCRIPTION | DESCRIPTION | K | LM | LM/W | DIMENSIONS | |
|--------------|----------------------|------------------------|------|------|------|------------|--------------------|
| 78554 | Rular 4ft standard | 24.5W LED module (SMD) | 4000 | 2800 | 114 | L: 1200mm | Proj: 66mm W: 59mm |
| 78555 | Rular 5ft standard | 41W LED module (SMD) | 4000 | 4600 | 112 | L: 1500mm | Proj: 66mm W: 59mm |
| 78556 | Rular 6ft standard | 53W LED module (SMD) | 4000 | 6000 | 113 | L: 1800mm | Proj: 66mm W: 59mm |
| 78557 | Rular 4ft high lumen | 44.5W LED module (SMD) | 4000 | 5000 | 112 | L: 1200mm | Proj: 66mm W: 59mm |
| 78558 | Rular 5ft high lumen | 66W LED module (SMD) | 4000 | 7500 | 114 | L: 1500mm | Proj: 66mm W: 59mm |
| 78559 | Rular 6ft high lumen | 70W LED module (SMD) | 4000 | 8000 | 114 | L: 1800mm | Proj: 66mm W: 59mm |

RULAR EMERGENCY

The Rular offers a direct replacement for the standard T8 fluorescent batten and has been designed with the installer in mind, the simple clip on diffuser combined with the loop in loop out push fit terminals as well as BESA entry points and knockouts make it incredibly fast and simple to install. Comes with a 5 year warranty as standard. Using the latest LED technology coupled with high performance light diffusion materials to eliminate LED spots. The Rular is available in 4ft, 5ft and 6ft in both standard and high lumen output. Also available in 3 hour emergency option.



| CODE | DESCRIPTION | DESCRIPTION | K | LM | LM/W | DIMENSIONS | |
|--------------|-------------------------|------------------------|------|------|------|------------|--------------------|
| 78560 | Rular 4ft standard EM | 24.5W LED module (SMD) | 4000 | 2800 | 114 | L: 1200mm | Proj: 66mm W: 59mm |
| 78561 | Rular 5ft standard EM | 41W LED module (SMD) | 4000 | 4600 | 112 | L: 1500mm | Proj: 66mm W: 59mm |
| 78562 | Rular 6ft standard EM | 53W LED module (SMD) | 4000 | 6000 | 113 | L: 1800mm | Proj: 66mm W: 59mm |
| 78563 | Rular 4ft high lumen EM | 44.5W LED module (SMD) | 4000 | 5000 | 112 | L: 1200mm | Proj: 66mm W: 59mm |
| 78564 | Rular 5ft high lumen EM | 66W LED module (SMD) | 4000 | 7500 | 114 | L: 1500mm | Proj: 66mm W: 59mm |
| 78565 | Rular 6ft high lumen EM | 70W LED module (SMD) | 4000 | 8000 | 114 | L: 1800mm | Proj: 66mm W: 59mm |

LINEAR PRO

The Linear Pro is our latest version of the bestselling Linear LED batten. We have used high performance LEDs that are driven by industry standard, flicker free, Tridonic drivers. The modular design and fast fix, push in cable connections make this simple and fast to install. Available in single and twin versions and three lengths, 4ft, 5ft and 6ft and emergency versions.



| CODE | DESCRIPTION | DESCRIPTION | K | LM | LM/W | DIMENSIONS | |
|--------------|-----------------------|------------------------|------|-------|------|------------|---------------------|
| 72364 | Linear Pro 4ft single | 31.5W LED module (SMD) | 4000 | 4100 | 130 | L: 1232mm | Proj: 60mm W: 50mm |
| 72365 | Linear Pro 5ft single | 47.5W LED module (SMD) | 4000 | 6200 | 131 | L: 1532mm | Proj: 60mm W: 50mm |
| 72366 | Linear Pro 6ft single | 54.5W LED module (SMD) | 4000 | 7100 | 130 | L: 1792mm | Proj: 60mm W: 50mm |
| 72367 | Linear Pro 4ft twin | 57W LED module (SMD) | 4000 | 7400 | 130 | L: 1232mm | Proj: 70mm W: 100mm |
| 72368 | Linear Pro 5ft twin | 77W LED module (SMD) | 4000 | 9900 | 129 | L: 1532mm | Proj: 70mm W: 100mm |
| 72369 | Linear Pro 6ft twin | 90W LED module (SMD) | 4000 | 11500 | 128 | L: 1797mm | Proj: 70mm W: 100mm |

LINEAR PRO EMERGENCY

The Linear Pro is our latest version of the bestselling Linear LED batten. We have used high performance LEDs that are driven by industry standard, flicker free, Tridonic drivers. The modular design and fast fix, push in cable connections make this simple and fast to install. Available in single and twin versions and three lengths, 4ft, 5ft and 6ft and emergency versions.



| CODE | DESCRIPTION | DESCRIPTION | K | LM | LM/W | DIMENSIONS | |
|--------------|--------------------------|------------------------|------|-------|------|------------|---------------------|
| 72370 | Linear Pro 4ft single EM | 31.5W LED module (SMD) | 4000 | 4100 | 130 | L: 1232mm | Proj: 60mm W: 50mm |
| 72371 | Linear Pro 5ft single EM | 47.5W LED module (SMD) | 4000 | 6200 | 131 | L: 1532mm | Proj: 60mm W: 50mm |
| 72372 | Linear Pro 6ft single EM | 54.5W LED module (SMD) | 4000 | 7100 | 130 | L: 1792mm | Proj: 60mm W: 50mm |
| 72373 | Linear Pro 4ft twin EM | 57W LED module (SMD) | 4000 | 7400 | 130 | L: 1232mm | Proj: 70mm W: 100mm |
| 72374 | Linear Pro 5ft twin EM | 77W LED module (SMD) | 4000 | 9900 | 129 | L: 1532mm | Proj: 70mm W: 100mm |
| 72375 | Linear Pro 6ft twin EM | 90W LED module (SMD) | 4000 | 11500 | 128 | L: 1797mm | Proj: 70mm W: 100mm |

REEVE 2

A direct LED replacement for twin 35W T5 fittings, this self contained anti corrosive LED batten has sealed end caps, ensuring its IP65 rating. The Reeve 2 benefits from an easy and quick installation with the use of the supplied stainless steel suspension clips to aid with wiring. Plus can be wired from a central wiring point due to the groove along the back of the fitting to hide the cable for a clean finish.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|--------------|----------------------|------|------|------|------------------------------|
| 73536 | Reeve 2 IP65 | 45W LED module (SMD) | 6500 | 4000 | 89 | Proj: 25mm L: 1560mm W: 75mm |

REEVE CONNECT

The Reeve Connect is a range of self contained, budget, LED battens. These anti-corrosive fittings are IP65 rated and benefit from the ability to be linked together. Between 8 and 15 can be joined together depending on the size. These fittings are ideal to be used where space for power feeds are scarce.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS | MAX. CONNECT |
|--------------|---------------------------------------|------|------|------|------------------------------|--------------|
| 75531 | Reeve Connect 2FT IP65 18W | 6500 | 1650 | 92 | L: 665mm Proj: 43mm W: 74mm | 15 fittings |
| 75532 | Reeve Connect 4FT IP65 36W | 6500 | 3300 | 92 | L: 1265mm Proj: 43mm W: 74mm | 12 fittings |
| 75533 | Reeve Connect 5FT IP65 45W | 6500 | 4000 | 89 | L: 1565mm Proj: 43mm W: 74mm | 12 fittings |
| 75534 | Reeve Connect 5FT High Lumen IP65 55W | 6500 | 6000 | 109 | L: 1565mm Proj: 43mm W: 74mm | 8 fittings |

MORDAX

The Mordax is an IP65 LED anti-corrosive batten that is 120+lm/W providing up to 50% energy savings compared to traditional fluorescent. A highly efficient solution for both interior and exterior applications. The Mordax Range of standard and high lumen output luminaires are constructed from vandal resistant polycarbonate making them shock, impact resistant and IK08 rated. Multiple drill-out conduit entry points are fitted on the housing and combined with the loop in loop out push fit terminals as well BESA compatible entry points make it incredibly fast and simple to install. A 5 year warranty as standard.




NEW PRODUCT

IK08 RATED

IP65 RATED

UP TO 122 LM/W



- Frosted polycarbonate finish
- Compatible with Microwave presence detector 73352, see page 66
- Supplied with mounting brackets and anti-tamper clips.




- Frosted polycarbonate finish
- Compatible with Microwave presence detector 73352, see page 66
- Battery warranty 2 years (replaceable)
- Supplied with mounting brackets and anti-tamper clips.

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|--------------|----------------------------------|------|------|------|------------------------------|
| 72700 | Mordax 4ft Single IP65 22.6W | 4000 | 2700 | 119 | L: 1265mm Proj: 90mm W: 90mm |
| 72701 | Mordax 5ft Single IP65 30.4W | 4000 | 3700 | 122 | L: 1565mm Proj: 90mm W: 90mm |
| 72702 | Mordax 6ft Single IP65 34.8W | 4000 | 4200 | 121 | L: 1830mm Proj: 90mm W: 90mm |
| 72703 | Mordax 4ft High Lumen IP65 43.5W | 4000 | 4800 | 110 | L: 1265mm Proj: 90mm W: 90mm |
| 72704 | Mordax 5ft High Lumen IP65 55.6W | 4000 | 6700 | 121 | L: 1565mm Proj: 90mm W: 90mm |
| 72705 | Mordax 6ft High Lumen IP65 74.4W | 4000 | 8250 | 111 | L: 1830mm Proj: 90mm W: 90mm |

MORDAX EMERGENCY

The Mordax is an IP65 LED anti-corrosive batten that is 120+lm/W providing up to 50% energy savings compared to traditional fluorescent. A highly efficient solution for both interior and exterior applications. The Mordax Range of standard and high lumen output luminaires are constructed from vandal resistant polycarbonate making them shock, impact resistant and IK08 rated. Multiple drill-out conduit entry points are fitted on the housing and combined with the loop in loop out push fit terminals as well BESA compatible entry points make it incredibly fast and simple to install. A 5 year warranty as standard.

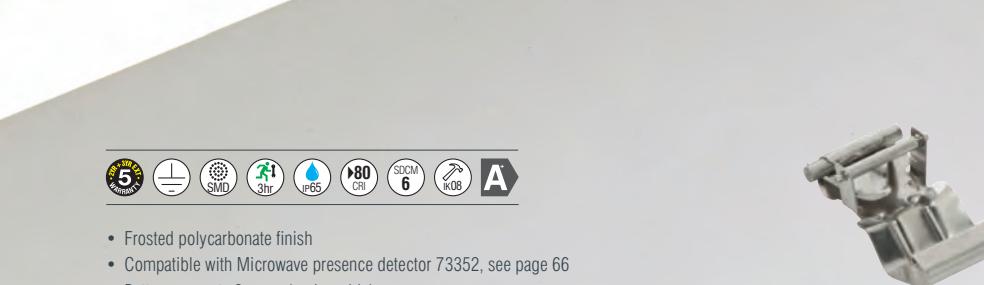NEW PRODUCT

IK08 RATED

IP65 RATED

UP TO 122 LM/W



- Frosted polycarbonate finish
- Compatible with Microwave presence detector 73352, see page 66
- Battery warranty 2 years (replaceable)
- Supplied with mounting brackets and anti-tamper clips.



- Frosted polycarbonate finish
- Compatible with Microwave presence detector 73352, see page 66
- Battery warranty 2 years (replaceable)
- Supplied with mounting brackets and anti-tamper clips.


| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|--------------|---------------------------------------|------|------|------|------------------------------|
| 72706 | Mordax 4ft single EM IP65 22.6W | 4000 | 2700 | 119 | L: 1265mm Proj: 90mm W: 90mm |
| 72707 | Mordax 5ft single EM IP65 30.4W | 4000 | 3700 | 122 | L: 1565mm Proj: 90mm W: 90mm |
| 72708 | Mordax 6ft single EM IP65 34.8W | 4000 | 4200 | 121 | L: 1830mm Proj: 90mm W: 90mm |
| 72709 | Mordax 4ft high lumen EM IP65 43.5W | 4000 | 4800 | 110 | L: 1265mm Proj: 90mm W: 90mm |
| 72710 | Mordax 5ft high lumen EM IP65 55.6W | 4000 | 6700 | 121 | L: 1565mm Proj: 90mm W: 90mm |
| 72711 | Mordax 6ft high lumen EM IP65 74.4W | 4000 | 8250 | 111 | L: 1830mm Proj: 90mm W: 90mm |
| 66786 | LED anti corrosive fourteen pack clip | | | | Natural stainless steel 301 |

LED anti corrosive clips

The Oxo is a range of LED tube ready fittings. This IP65 version offers protection against water intrusion and is constructed from polycarbonate making it sturdy and reliable. Boasts double end supply, making installation even easier. Available in various lengths in single or twin. The LED glass tube range boasts a high lumen output of up to 2600 lumens and the ideal choice to be fitted into our Oxo products.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|---------------------|-------------------------|---------------|------|------|-------------------------------|
| 78566 | Oxo 4ft single IP65 | 4ft LED tube (required) | | | | Proj: 62mm L: 1276mm W: 74mm |
| 78567 | Oxo 5ft single IP65 | 5ft LED tube (required) | | | | Proj: 62mm L: 1566mm W: 74mm |
| 78569 | Oxo 4ft twin IP65 | 4ft LED tube (required) | | | | Proj: 62mm L: 1276mm W: 112mm |
| 78570 | Oxo 5FT twin IP65 | 5ft LED tube (required) | | | | Proj: 62mm L: 1566mm W: 112mm |
| 78956 | LED Tube 4ft 18W | | 18W LED (SMD) | 4000 | 2000 | 111 L: 1200mm Dia: 26mm |
| 78957 | LED Tube 5ft 23W | | 23W LED (SMD) | 4000 | 2500 | 109 L: 1500mm Dia: 26mm |

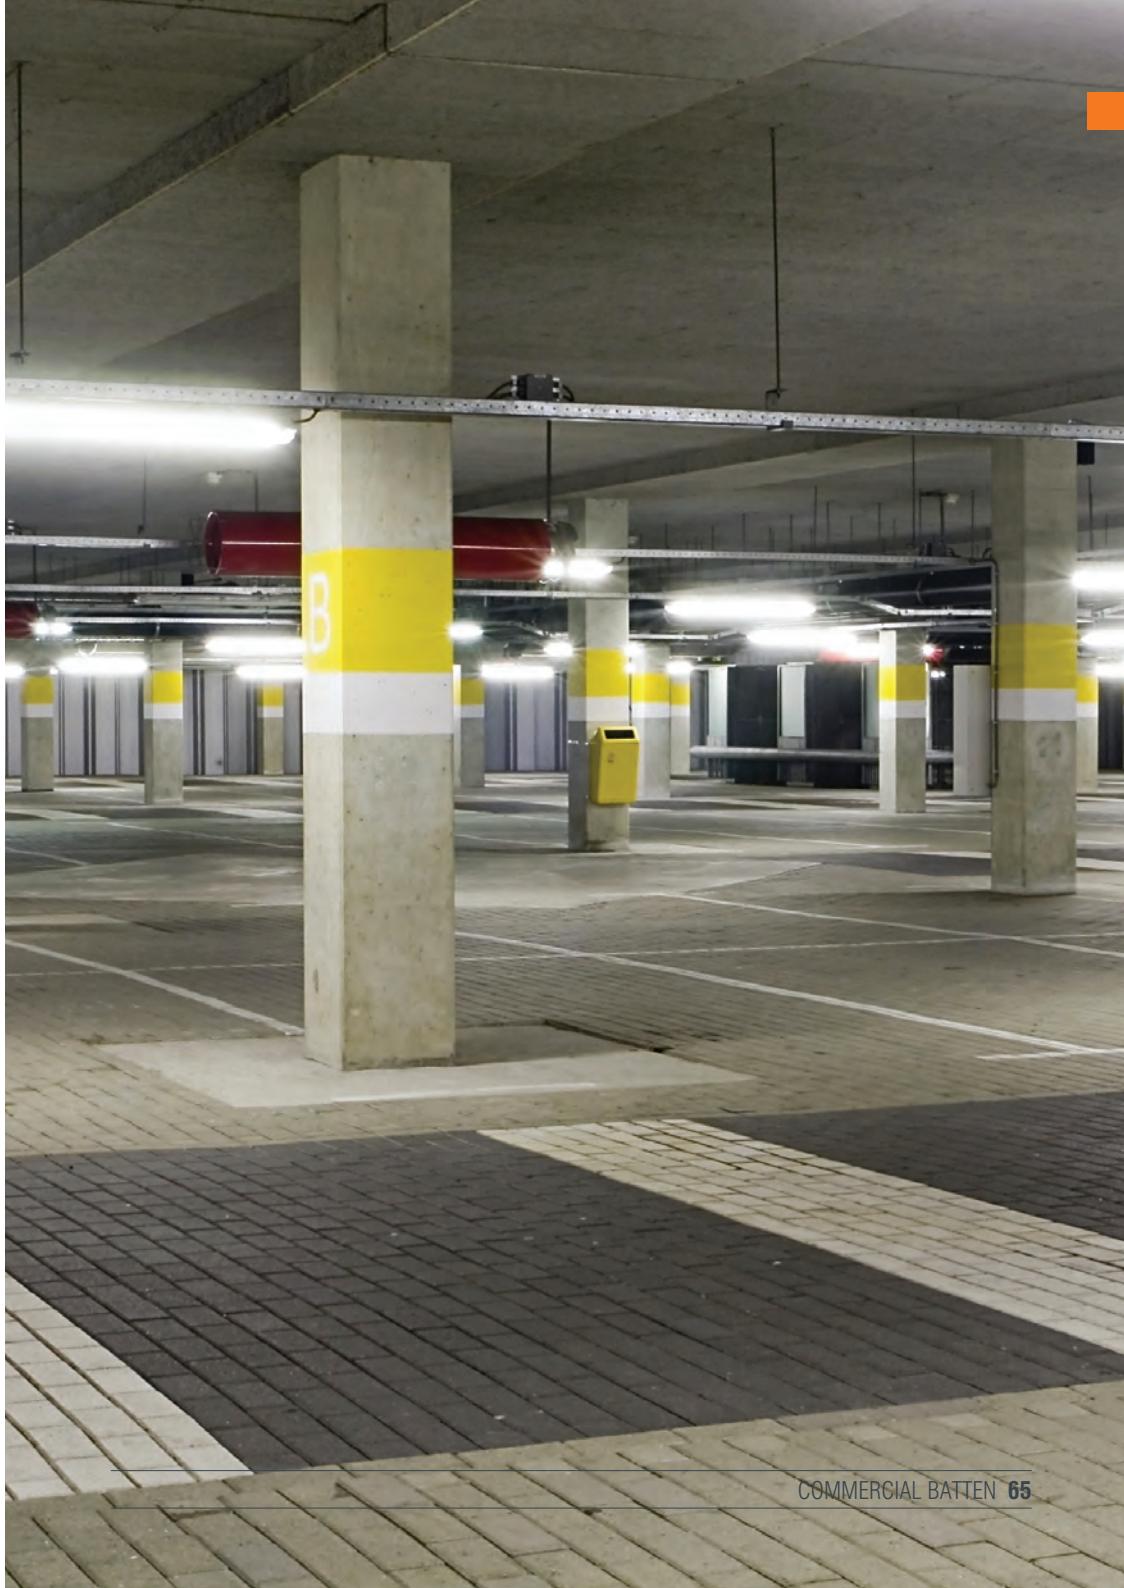

MICROWAVE PRESENCE DETECTOR

A discreet unit that detects movement. Suitable with our LED batten ranges. The unit can control a 800W resistive load and 400W of driver load. Perfect for low use areas, such as corridors, and it is ideal for energy saving applications.



| CODE | DESCRIPTION | DIMENSIONS |
|-------|----------------------------------|--------------------------|
| 73352 | Microwave presence detector IP65 | H: 65mm W: 72mm L: 140mm |

MICROWAVE PRESENCE DETECTOR



The Altum LED Highbay produces a market leading 130lm/W. Supplied as standard with 1 - 10V dimmable flicker-free driver. It features an IP65 rated die-cast aluminium body for an enduring build-quality suited to industrial environments. Energy savings of up to 65% compared to Metal Halide, while maintenance costs are also significantly reduced thanks to a high thermal efficiency aluminium heatsink that leads to a low operating temperature and greater heat dissipation. Optional accessories include Microwave sensors, adjustable installation bracket, remote control and a choice of diffusers.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|-----------------|-----------------------|------|-------|------|---------------------|
| 78573 | Altum 100W IP65 | 100W LED module (SMD) | 6500 | 13000 | 130 | H: 140mm Dia: 260mm |
| 78574 | Altum 150W IP65 | 150W LED module (SMD) | 6500 | 19500 | 130 | H: 140mm Dia: 260mm |
| 78575 | Altum 200W IP65 | 200W LED module (SMD) | 6500 | 26000 | 130 | H: 150mm Dia: 280mm |





78578



78579



78580



78752



78753



78576



79397



78577



78774

- Microwave sensor accessory available, featuring step dimming options
- Microwave sensor: 360° (150° on a wall) detection angle, 10m max. range with a 5 sec - 30 min timer function, 5 Lux to 150 Lux range
- Remote control accessory to switch between the variety of sensor options, including step dimming

| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|--------------|--|-------------------|---------------------------------|
| 78578 | Altum lens 60° | Clear prismatic | Dia: 180mm |
| 78579 | Altum lens 90° | Clear prismatic | Dia: 180mm |
| 78580 | Altum polycarbonate shade 70° | Clear prismatic | Dia: 410mm Proj: 267mm |
| 78752 | Altum polycarbonate shade bottom cover | Clear prismatic | Dia: 413mm Proj: 7mm |
| 78753 | Altum aluminium shade accessory | Brushed aluminium | Dia: 353mm Proj: 130mm |
| 78576 | Altum bracket for 100W | Matt black | L: 150mm Proj: 35mm |
| 79397 | Altum bracket for 150W or 200W | Matt black | H: 147mm W: 150mm Proj: 35mm |
| 78577 | Altum microwave sensor IP65 | Black plastic | Dia: 73.2mm W: 61.9mm L: 79.9mm |
| 78774 | Altum remote control | White ABS plastic | L: 540mm W: 140mm H: 12mm |

STANNIS

The Stannis LED Lowbay offers a really smart solution for racked out areas, such as warehouses and distribution centres. Efficient and powerful SMD chips delivering up to 12240 lumens powered by a flicker free Tridonic* driver and combined with an ultra efficient and thermally optimised housing, deliver outstanding lighting performances. The Stannis can be surface mounted or suspended (suspension kit included) and is linkable using the optional link brackets.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|-------------------------|-----------------------|------|-------|------|----------------------------|
| 78581 | Stannis 80W | 80W LED module (SMD) | 6500 | 8160 | 102 | L: 800mm W: 103mm H: 80mm |
| 78582 | Stannis 120W | 120W LED module (SMD) | 6500 | 12240 | 102 | L: 1200mm W: 103mm H: 80mm |
| 78583 | Stannis 80W Bracket x 2 | | | | | L: 534mm W: 25mm D: 55mm |
| 78584 | Stannis 120W Bracket | | | | | L: 191mm W: 18mm D: 55mm |

HYDRA

The IP65 Hydra bulkhead range is engineered with a tough polycarbonate body and opal diffuser for even light output with no LED hot spots, all versions and accessories are IK08 impact resistant and designed to last. Powered by a flicker free Tridonic driver and combined with an efficient and thermally optimised housing it delivers outstanding lighting performances. Designed with the installer in mind with BESA mounting and side knockouts, hinged gear tray, fast fix connector box, interchangeable bezels and both emergency and microwave options. Comes as standard with a 5 year warranty.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|--------------|-----------------------------|------|------|------|-----------------------|
| 74824 | Hydra IP65 15W | 4000 | 1200 | 80 | Proj: 90mm Dia: 300mm |
| 74825 | Hydra microwave IP65 15W | 4000 | 1200 | 80 | Proj: 90mm Dia: 300mm |
| 74826 | Hydra EM IP65 15W | 4000 | 1200 | 80 | Proj: 90mm Dia: 300mm |
| 74827 | Hydra microwave EM IP65 15W | 4000 | 1200 | 80 | Proj: 90mm Dia: 300mm |

HYDRA BEZEL

Bezel accessories for the Hydra, available in a choice of finishes and designs.



| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|--------------|-----------------------------|-----------------------------------|-----------------------|
| 74828 | Hydra eyelid bezel | Matt white textured polycarbonate | Proj: 87mm Dia: 300mm |
| 74829 | Hydra grill bezel | Matt white textured polycarbonate | Proj: 80mm Dia: 300mm |
| 74831 | Hydra plain bezel | Black polycarbonate | Proj: 50mm Dia: 300mm |
| 74832 | Hydra eyelid bezel | Matt black textured polycarbonate | H: 87mm Dia: 300mm |
| 74833 | Hydra grill bezel | Matt black textured polycarbonate | H: 80mm Dia: 300mm |
| 74839 | Hydra plain bezel | Chrome effect ABS plastic | H: 50mm Dia: 300mm |
| 79977 | Hydra anti-theft screw pack | Steel | |

FORCA 12W

The IP65 Forca bulkhead range is engineered with a tough polycarbonate body and opal diffuser for even light output with no LED hot spots, all versions and accessories are IK08 impact resistant and designed to last. Powered by a flicker free driver it is ultra efficient and delivers up to 1600 lumens. Designed with the installer in mind with BESA mounting and side knockouts, hinged gear tray*, fast fix connector box, interchangeable bezels and emergency, microwave, stepped dimming and photocell options. The Forca is available in both CCT and 4200k versions and comes as standard with a 5 year warranty.



Wall back, gasket, driver & PCB

Diffuser

Cover



- Gloss white & opal polycarbonate finish
- 12W LED module (SMD)
- Comes complete with white plain bezel




| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|-----------------------------|------|------|------|-----------------------|
| 77892 | Forca IP65 12W | 4200 | 1140 | 95 | Proj: 90mm Dia: 340mm |
| 77893 | Forca Microwave IP65 12W | 4200 | 1140 | 95 | Proj: 90mm Dia: 340mm |
| 77895 | Forca EM IP65 12W | 4200 | 1140 | 95 | Proj: 90mm Dia: 340mm |
| 77896 | Forca EM Microwave IP65 12W | 4200 | 1140 | 95 | Proj: 90mm Dia: 340mm |



FORCA 18W CCT


Using the latest in Colour Changing Technology (CCT), each Forca can be 3000K, 4200K or 6500K by flicking the switch on the LED board to the desired colour temperature. The Forca is a functional bulkhead built to last, manufactured from polycarbonate, this fitting is suitable for both commercial and domestic applications. Featuring a screw lock design & IK08 rated, these fittings are sturdy and reliable; available in a choice of standard, emergency and sensor options. Range boasts a choice of bezel finishes & shapes.

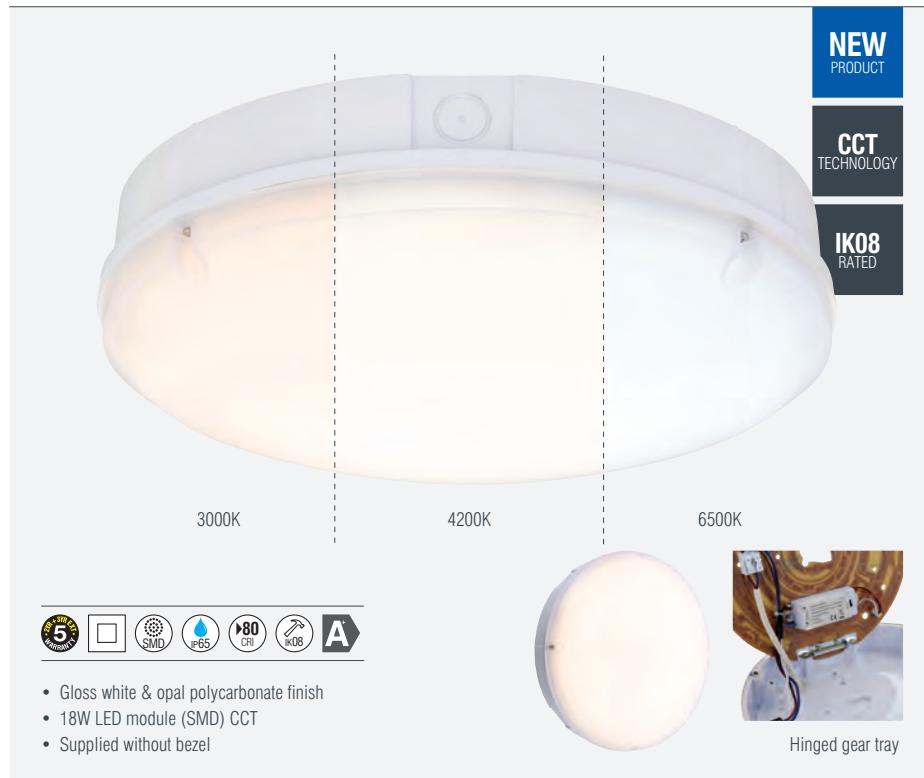

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|----------------------------------|----------------|------|------|-----------------------|
| 77897 | Forca CCT IP65 18W | 3000/4200/6500 | 1600 | 89 | Proj: 90mm Dia: 300mm |
| 77898 | Forca CCT MW IP65 18W | 3000/4200/6500 | 1600 | 89 | Proj: 90mm Dia: 300mm |
| 77899 | Forca CCT photocell IP65 18W | 3000/4200/6500 | 1600 | 89 | Proj: 90mm Dia: 300mm |
| 77900 | Forca CCT Step Dim IP65 18W | 3000/4200/6500 | 1600 | 89 | Proj: 90mm Dia: 300mm |
| 77901 | Forca CCT EM IP65 18W | 3000/4200/6500 | 1600 | 89 | Proj: 90mm Dia: 300mm |
| 77902 | Forca CCT EM + MW IP65 18W | 3000/4200/6500 | 1600 | 89 | Proj: 90mm Dia: 300mm |
| 77903 | Forca CCT EM + Step Dim IP65 18W | 3000/4200/6500 | 1600 | 89 | Proj: 90mm Dia: 300mm |

FORCA BEZEL

For use with Forca 12W & Forca 18W CCT.

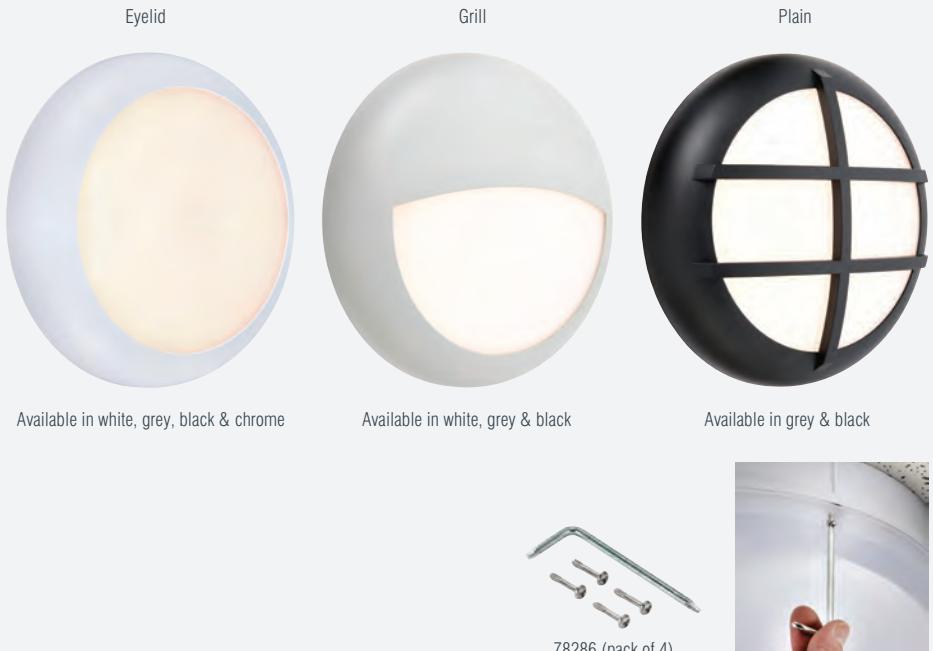

| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|-------|--------------------------------|-----------------------------------|-----------------------|
| 77904 | Forca bezel white plain bezel | Gloss white polycarbonate | Proj: 60mm Dia: 340mm |
| 77905 | Forca bezel white eyelid bezel | Matt white textured polycarbonate | Proj: 83mm Dia: 340mm |
| 77907 | Forca bezel grey plain bezel | Grey polycarbonate | Proj: 60mm Dia: 340mm |
| 77908 | Forca bezel grey eyelid bezel | Grey polycarbonate | Proj: 83mm Dia: 340mm |
| 77909 | Forca bezel grey grill bezel | Grey polycarbonate | Proj: 97mm Dia: 340mm |
| 77910 | Forca bezel black plain bezel | Matt black textured polycarbonate | Proj: 60mm Dia: 340mm |
| 77911 | Forca bezel black eyelid bezel | Matt black textured polycarbonate | Proj: 83mm Dia: 340mm |
| 77912 | Forca bezel black grill bezel | Matt black textured polycarbonate | Proj: 97mm Dia: 340mm |
| 77913 | Forca bezel chrome plain bezel | Chrome effect polycarbonate | Proj: 60mm Dia: 340mm |
| 78286 | Forca anti-theft screw pack | Steel | |

MONTANA

The Montana uses the latest in Colour Changing Technology (CCT), The Montana can be warm white, cool white or daylight white with the simple flick of a wall switch, a memory function maintains the last colour selected. The SMD LED module offers 3000K, 4000K or 6500K and projects up to 940 lumens. Easy to install with the fast fix terminal block. Suitable for both domestic and commercial applications. Available in a choice of finishes.



| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS |
|-------|-------------------------------|--------------|----------------|-----|------|-----------------------|
| 74768 | Montana 330mm round flush 15W | Chrome plate | 3000/4000/6500 | 940 | 63 | Proj: 70mm Dia: 330mm |
| 74767 | Montana 330mm round flush 15W | Gloss white | 3000/4000/6500 | 940 | 63 | Proj: 70mm Dia: 330mm |


MONTANA SMART

In addition to the CCT Technology, the Montana Smart incorporates the latest in smart technology. This smart fitting can all be controlled via the SaxbySmart app, allowing you ultimate control of your lighting, from changing colour, dimming or switching on and off. It is also compatible with Amazon Alexa and Google Home to allow you to control your lights with your voice. Easy to install with the fast fix terminal block. Suitable for both domestic and commercial applications and comes in a satin nickel finish.



| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS |
|-------|-------------------|--------------|--------------|-----|------|-----------------------|
| 79307 | Montana Smart 15W | Satin nickel | 2700 to 6500 | 940 | 63 | Proj: 70mm Dia: 330mm |
| 79306 | Montana Smart 15W | Gloss white | 2700 to 6500 | 940 | 63 | Proj: 70mm Dia: 330mm |

This Cobra XS is a 15W LED bathroom flush, constructed from ABS plastic, and IP44 rated to ensure bathroom placement suitability. Energy efficient, this range of flush lights emits a high light output of warm white or cool white. Choice of finish and colour temperature available.

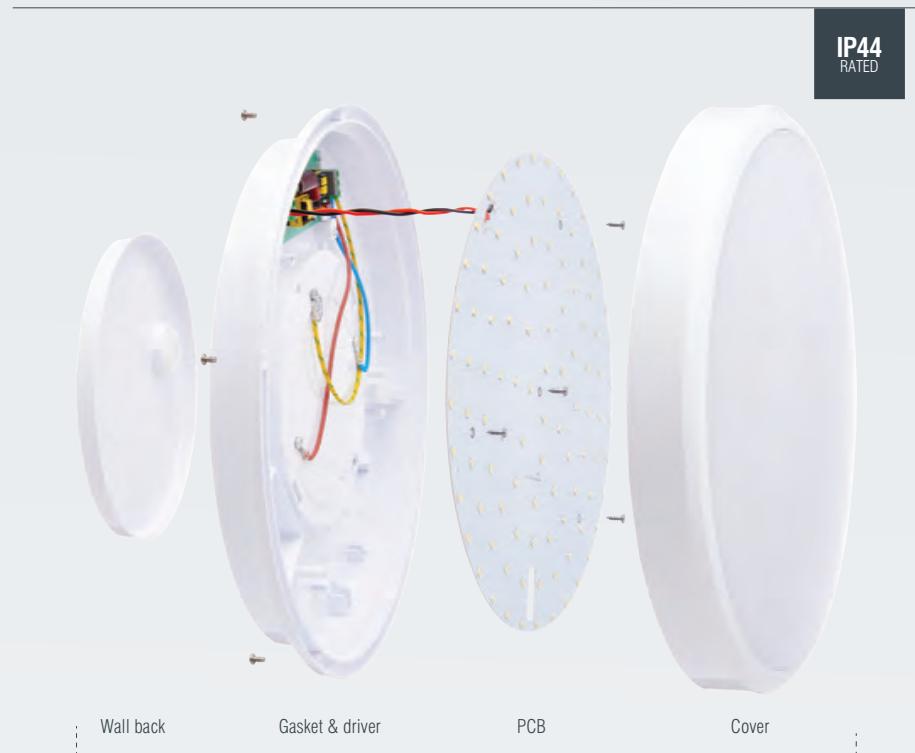

- Constructed from opal polycarbonate & ABS plastic
- 15W LED module (SMD)

| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS |
|-------|-------------------------------------|---------------|------|------|------|-----------------------|
| 70449 | Cobra XS 300mm round flush IP44 15W | Chrome effect | 3000 | 1200 | 80 | Proj: 75mm Dia: 300mm |
| 70450 | Cobra XS 300mm round flush IP44 15W | Chrome effect | 4200 | 1200 | 80 | Proj: 75mm Dia: 300mm |
| 62168 | Cobra XS 300mm round flush IP44 15W | White | 3000 | 1200 | 80 | Proj: 75mm Dia: 300mm |
| 70448 | Cobra XS 300mm round flush IP44 15W | White | 4200 | 1200 | 80 | Proj: 75mm Dia: 300mm |

Simple yet effective, the Broco is a replacement for conventional compact fluorescent. It offers homogeneous light distribution and is highly efficient with a 1100 lumen output. Constructed from PMMA plastic, and is IP44 rated. Its clean and neutral design means it would suit any home decor. Standard and microwave options available.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|----------------------|----------------------|------|------|------|-----------------------|
| 78585 | Broco IP44 | 16W LED module (SMD) | 3000 | 1100 | 69 | Proj: 84mm Dia: 300mm |
| 78586 | Broco Microwave IP44 | 16W LED module (SMD) | 3000 | 1100 | 69 | Proj: 84mm Dia: 300mm |

TRACK

The Track range provides you with endless possibilities. Ideal for display purposes where great flexibility is required and suitable for retail, commercial and domestic applications.



- Constructed from aluminium alloy & polycarbonate
- Includes 1 x live end & 1 x dead end

| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|--------------|-------------|--------|---------------------------|
| 78654 | Track 1m | White | L: 1000mm H: 17mm W: 35mm |
| 78657 | Track 2m | White | L: 2000mm H: 17mm W: 35mm |
| 78660 | Track 3m | White | L: 3000mm H: 17mm W: 35mm |
| 78656 | Track 1m | Silver | L: 1000mm H: 17mm W: 35mm |
| 78659 | Track 2m | Silver | L: 2000mm H: 17mm W: 35mm |
| 78662 | Track 3m | Silver | L: 3000mm H: 17mm W: 35mm |
| 78655 | Track 1m | Black | L: 1000mm H: 17mm W: 35mm |
| 78658 | Track 2m | Black | L: 2000mm H: 17mm W: 35mm |
| 78661 | Track 3m | Black | L: 3000mm H: 17mm W: 35mm |

CODY

High lumen output, adjustable and dimmable, the Cody has it all. This sleek and modern track head boasts a beam angle of 36° meaning light can be directed exactly where you need it and reduce glare. Can be dimmed between 10% - 100% and comes in a matt white or matt black finish.



NEW
PRODUCT

UP TO
3500
LUMENS

DIMMABLE



- Constructed from die cast aluminium alloy & acrylic
- 38W LED module (COB)

| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS | TILT | ROTATION |
|--------------|---------------------|------------|------|------|------|--------------------|------|----------|
| 79219 | Cody track head 38W | Matt white | 4000 | 3500 | 92 | H: 175mm Dia: 90mm | 90° | 350° |
| 79303 | Cody track head 38W | Matt black | 4000 | 3000 | 79 | H: 175mm Dia: 90mm | 90° | 350° |

TRACK ACCESSORIES

Ideal for display purposes where great flexibility is required. The perfect fitting for retail, commercial and domestic applications.



YEAR
2
MARKET

| WHITE | BLACK | SILVER | DESCRIPTION | DIMENSIONS |
|---------------|--------------|--------------|--------------------------|--------------------------|
| 79216 | 79217 | 79218 | Track suspension | L: 1500mm Dia: 50mm |
| 3TRAWI | 71889 | 72721 | Track central connector | L: 180mm H: 17mm W: 35mm |
| 75538 | 71896 | 72728 | Track pendant adaptor | L: 42mm H: 40mm W: 35mm |
| 49145 | 71892 | 72724 | Track dead End | L: 15mm H: 17mm W: 35mm |
| 75535 | 71893 | 72725 | Track flexible connector | L: 300mm H: 17mm W: 35mm |

TRACK ACCESSORIES



| WHITE | BLACK | SILVER | DESCRIPTION | DIMENSIONS |
|----------------|--------------|--------------|--------------------------|---------------------------|
| 75537 | 71895 | 72727 | Track x connector | L: 182mm H: 17mm W: 182mm |
| 3TRAWP | 71888 | 72720 | Track live end | L: 107mm H: 17mm W: 35mm |
| 3TRAWIS | 71890 | 72722 | Track internal connector | L: 79mm H: 17mm W: 35mm |
| 3TRAWL | 71891 | 72723 | Track I connector | L: 107mm H: 17mm W: 107mm |
| 75536 | 71894 | 72726 | Track t connector | L: 180mm H: 17mm W: 107mm |

PACTO

Small and compact, with a cool white high lumen output, this high performance module fitting is ideal for commercial application. It boasts an adjustable head and can be fitted to our Track range. A choice of white, black or silver finishes are available.



- Constructed from die cast aluminium alloy & acrylic
- 10W LED module



| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS | | TIPT | ROTATION |
|-------|----------------------|------------|------|-----|------|------------|---------|---------|----------|
| 78959 | Pacto track head 10W | Matt white | 4000 | 950 | 95 | H: 156mm | W: 65mm | D: 54mm | 90° 350° |
| 78960 | Pacto track head 10W | Matt black | 4000 | 850 | 85 | H: 156mm | W: 65mm | D: 54mm | 90° 350° |
| 78961 | Pacto track head 10W | Silver | 4000 | 920 | 92 | H: 156mm | W: 65mm | D: 54mm | 90° 350° |

CORA

The Cora is an adjustable track spotlight, with an integrated COB LED chip for energy efficiency. The smooth gloss white head and chrome arm allows for 350° rotation and tilt. This flexible fitting allows for maximum control and accurate direction of light. Designed for use with a single circuit track.



- Constructed from die cast aluminium alloy & steel & ABS plastic
- Gloss white & chrome plate finish

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|-------|-------------|---------------------|------|-----|------|------------|------------------|
| 61522 | Cora | 7W LED module (COB) | 4200 | 585 | 84 | H: 135mm | W: 52mm D: 130mm |

The Conor is a multidirectional mains track GU10 spotlight. Comes in a variety of colour finishes.



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | TIILT | ROTATION |
|----------------|------------------|--------------|-----------------|--------------------------|-------|----------|
| 3TH139W | Conor track head | Gloss white | GU10 (required) | H: 88mm W: 36mm D: 117mm | 90° | 350° |
| 78650 | Conor track head | Matt black | GU10 (required) | H: 88mm W: 36mm D: 117mm | 90° | 350° |
| 78651 | Conor track head | Satin chrome | GU10 (required) | H: 88mm W: 36mm D: 117mm | 90° | 350° |

The Monte track head is dimmable, has a rotation of 350° and an angle tilt of 90°. Suitable with our single circuit track system, compatible with LED lamps. Available in a choice of colour finishes.



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS |
|--------------|------------------|-----------------------------|-----------------------------------|--------------------------|
| 42315 | Monte track head | Gloss white & chrome plate | Max. 6W GU10 reflector (required) | H: 85mm W: 57mm D: 145mm |
| 71899 | Monte track head | Matt black & chrome plate | Max. 6W GU10 reflector (required) | H: 85mm W: 57mm D: 145mm |
| 42316 | Monte track head | Satin chrome & chrome plate | Max. 6W GU10 reflector (required) | H: 85mm W: 57mm D: 145mm |

The Bullett kit comprises of 3 multi directional GU10 spotlights and a metre of mains track finish. The spotlights feature distinctive decorative markings on the outside and a classic bullet shape. Options include gloss white, satin nickel & matt black finishes.



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | TIPT | ROTATION |
|----------------|---------------------|--------------|---------------------|-------------------------------|------|----------|
| 48024 | Bullett kit | Gloss white | 3 x GU10 (required) | L: 1000mm Proj: 140mm W: 57mm | 90° | 350° |
| 48025 | Bullett kit | Satin chrome | 3 x GU10 (required) | L: 1000mm Proj: 140mm W: 57mm | 90° | 350° |
| 78649 | Bullett kit | Matt black | 3 x GU10 (required) | L: 1000mm Proj: 140mm W: 57mm | 90° | 350° |
| 3TH113W | Bullett single head | Gloss white | GU10 (required) | H: 87mm W: 57mm D: 140mm | 90° | 350° |
| 72718 | Bullett single head | Satin chrome | GU10 (required) | H: 87mm W: 57mm D: 140mm | 90° | 350° |
| 71886 | Bullett single head | Matt black | GU10 (required) | H: 87mm W: 57mm D: 140mm | 90° | 350° |



INTERIOR

Simple, stylish and modern, our interior lighting range covers all bases. We offer a range of spotlights, bars and wall lights. The minimalist design and choice of finishes mean that our products will fit in with any home décor.

COLLECTION
WALL

96
108

The Amalfi is a simple lighting range, covering everything from single spotlights to 6 light bars with a choice of finish. All suitable for use with LED lamps for improved energy efficiency.



- Constructed from steel

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | TIILT | ROTATION |
|-----------------|------------------|---------------|-----------------|------------------------|-------|----------|
| 43281 | Amalfi 1lt plate | Gloss white | GU10 (required) | Proj: 130mm Dia: 80mm | 90° | 350° |
| G2521013 | Amalfi 1lt plate | Satin nickel | GU10 (required) | Proj: 130mm Dia: 80mm | 90° | 350° |
| 43277 | Amalfi 1lt plate | Chrome plate | GU10 (required) | Proj: 130mm Dia: 80mm | 90° | 350° |
| 60998 | Amalfi 1lt plate | Antique brass | GU10 (required) | Proj: 130mm Dia: 80mm | 90° | 350° |
| 43283 | Amalfi 3lt round | Gloss white | GU10 (required) | Proj: 130mm Dia: 190mm | 90° | 350° |
| G2523413 | Amalfi 3lt round | Satin nickel | GU10 (required) | Proj: 130mm Dia: 190mm | 90° | 350° |
| 43279 | Amalfi 3lt round | Chrome plate | GU10 (required) | Proj: 130mm Dia: 190mm | 90° | 350° |
| 60997 | Amalfi 3lt round | Antique brass | GU10 (required) | Proj: 130mm Dia: 190mm | 90° | 350° |



- Constructed from steel
- Adjustable (4 bar only)

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | TIILT | ROTATION |
|-----------------|----------------|---------------|-----------------|------------------------------|-------|----------|
| 43282 | Amalfi 2lt bar | Gloss white | GU10 (required) | Proj: 130mm L: 255mm W: 90mm | 90° | 350° |
| G2521313 | Amalfi 2lt bar | Satin nickel | GU10 (required) | Proj: 130mm L: 255mm W: 90mm | 90° | 350° |
| 43278 | Amalfi 2lt bar | Chrome plate | GU10 (required) | Proj: 130mm L: 255mm W: 90mm | 90° | 350° |
| 60999 | Amalfi 2lt bar | Antique brass | GU10 (required) | Proj: 130mm L: 255mm W: 90mm | 90° | 350° |
| 60993 | Amalfi 4lt bar | Gloss white | GU10 (required) | Proj: 130mm L: 605mm W: 90mm | 90° | 350° |
| 60995 | Amalfi 4lt bar | Satin nickel | GU10 (required) | Proj: 130mm L: 605mm W: 90mm | 90° | 350° |
| 60991 | Amalfi 4lt bar | Chrome plate | GU10 (required) | Proj: 130mm L: 605mm W: 90mm | 90° | 350° |
| 60992 | Amalfi 4lt bar | Antique brass | GU10 (required) | Proj: 130mm L: 605mm W: 90mm | 90° | 350° |

A simple six light spotlight bar from the Amalfi range. Fully adjustable so light can be directed exactly where you need it. Suitable for commercial and domestic use.



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | TIILT | ROTATION |
|--------------|----------------|---------------|-----------------|------------------------------|-------|----------|
| 61002 | Amalfi 6lt bar | Gloss white | GU10 (required) | Proj: 130mm L: 960mm W: 90mm | 90° | 350° |
| 61003 | Amalfi 6lt bar | Satin nickel | GU10 (required) | Proj: 130mm L: 960mm W: 90mm | 90° | 350° |
| 61000 | Amalfi 6lt bar | Chrome plate | GU10 (required) | Proj: 130mm L: 960mm W: 90mm | 90° | 350° |
| 61001 | Amalfi 6lt bar | Antique brass | GU10 (required) | Proj: 130mm L: 960mm W: 90mm | 90° | 350° |

The Amalfi USB table lamp is the ideal fitting for studies or home offices due to its portability. Constructed from steel and supplied with rocker switch this product is practical as well as stylish. Suitable for use with LED lamps.



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS |
|--------------|-----------------------|--------------|-----------------|----------------------------|
| 76645 | Amalfi task table USB | Satin nickel | GU10 (required) | H: 475mm W: 150mm D: 150mm |

This spotlight range is adjustable to direct light as you need, all of which are dimmable and suitable for use with LED lamps. Matching items and different colour finishes are available.



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | TIPT |
|---------------|-----------------|----------------------------|---------------------|-------------------------------|------|
| 75550 | Krius 1lt plate | Gloss white & satin chrome | GU10 (required) | Proj: 115mm Dia: 90mm | 330° |
| 75551 | Krius 3lt round | Gloss white & satin chrome | 3 x GU10 (required) | Proj: 115mm Dia: 185mm | 330° |
| 75553 | Krius 4lt bar | Gloss white & satin chrome | 4 x GU10 (required) | Proj: 125mm L: 820mm W: 110mm | 330° |
| 811-SC | Krius 1lt plate | Satin chrome | GU10 (required) | Proj: 115mm Dia: 90mm | 330° |
| 813-SC | Krius 3lt round | Satin chrome | 3 x GU10 (required) | Proj: 115mm Dia: 185mm | 330° |
| 814-SC | Krius 4lt bar | Satin chrome | 4 x GU10 (required) | Proj: 125mm L: 820mm W: 110mm | 330° |

The Arezzo spotlight range is compatible with GU10 LED lamps. Suitable for commercial or domestic use, fully adjustable to concentrate light where it's needed most. Finished in matt white paint or satin nickel with chrome detail. Available as a single spotlight, three plate or four light bar.



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS | TIPT | ROTATION |
|--------------|------------------|-----------------------------|---------------------|------------------------------|------|----------|
| 73684 | Arezzo 1lt plate | Matt white & chrome plate | GU10 (required) | Proj: 145mm Dia: 120mm | 90° | 350° |
| 73685 | Arezzo 3lt round | Matt white & chrome plate | 3 x GU10 (required) | Proj: 145mm Dia: 240mm | 90° | 350° |
| 73686 | Arezzo 4lt bar | Matt white & chrome plate | 4 x GU10 (required) | Proj: 165mm L: 700mm W: 85mm | 90° | 350° |
| 73687 | Arezzo 1lt plate | Satin chrome & chrome plate | GU10 (required) | Proj: 145mm Dia: 120mm | 90° | 350° |
| 73688 | Arezzo 3lt round | Satin chrome & chrome plate | 3 x GU10 (required) | Proj: 145mm Dia: 240mm | 90° | 350° |
| 73689 | Arezzo 4lt bar | Satin chrome & chrome plate | 4 x GU10 (required) | Proj: 165mm L: 700mm W: 85mm | 90° | 350° |



PALERMO

A simple and stylish spotlight range. These functional and adjustable fittings are suitable to be placed in an array of rooms. The Palermo spotlight range offers a choice of single, triple and bar options in a brushed chrome finish all of which are suitable for use with LED lamps.



- Constructed from steel
- Brushed chrome & chrome plate finish

| CODE | DESCRIPTION | LAMP | DIMENSIONS | TIILT | ROTATION |
|-----------------|-------------------|---------------------|------------------------------|-------|----------|
| G5501077 | Palermo 1lt plate | GU10 (required) | Proj: 110mm Dia: 80mm | 90° | 350° |
| G5503477 | Palermo 3lt round | 3 x GU10 (required) | Proj: 110mm Dia: 190mm | 90° | 350° |
| G5503177 | Palermo 4lt bar | 4 x GU10 (required) | Proj: 140mm L: 800mm W: 90mm | 90° | 350° |

GROVE

A four light spot light featuring a square base and 4 spots that are fully adjustable, all finished in polished chrome. Dimmable and suitable for use with LED lamps.



- Constructed from steel

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS |
|-----------------|------------------|--------------|---------------------|-----------------------|
| EL-10047 | Grove 4lt square | Chrome plate | 4 x GU10 (required) | Proj: 100mm Sq: 220mm |



The Harper is a twin ceiling fitting with a bowed chrome frame housing and includes 2 x 28W T5 fluorescent lamps. Constructed from steel with a chrome plate finish. Available in two sizes - 675mm and 1280mm.



- Constructed from steel
- Chrome plate finish
- Tube included

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-----------------|------------------------|---------------|------|------|------|-------------------------------|
| EL-10085 | Harper 1280mm flush HF | 2 x 28W G5 T5 | 6500 | 5370 | 96 | L: 1280mm Proj: 125mm W: 85mm |
| EL-10081 | Harper 675mm flush HF | 2 x 24W G5 T5 | 6500 | 3400 | 71 | L: 675mm Proj: 120mm W: 85mm |

Complement and enhance any hallway or reception with this cylindrical satin nickel or matt white wall light, which provides up and down accent lighting.



- Constructed from steel

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS |
|----------------|--------------|--------------|---------------------|-----------------------------|
| 70565 | Odi 2lt wall | Matt white | 2 x GU10 (required) | Proj: 90mm H: 130mm W: 80mm |
| OD51004 | Odi 2lt wall | Satin nickel | 2 x GU10 (required) | Proj: 90mm H: 130mm W: 80mm |

The Slater is a range of compact up and down LED wall lights, perfect for providing accent lighting and suitable for both domestic and commercial use. Finished in matt white and available in 2 different sizes.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|-----------------------|---------------------|------|-----|------|------------------------------|
| 55592 | Slater 1lt 200mm wall | 6W LED module (SMD) | 4000 | 490 | 82 | Proj: 100mm H: 80mm W: 200mm |
| 55591 | Slater 1lt 100mm wall | 6W LED module (SMD) | 4000 | 490 | 82 | Proj: 100mm H: 80mm W: 100mm |

This SMD LED brushed aluminium up & down wall light has a contemporary feel with its boxed design, fitted with a frosted glass diffuser which provides a soft light. Low maintenance and energy efficient, this fitting is the ideal choice for both domestic and commercial environments.



- Constructed from aluminium alloy & frosted glass
- Brushed silver anodised finish

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|-------|----------------|---------------------|------|-----|------|------------|------------------|
| 46395 | Shale 1lt wall | 8W LED module (SMD) | 3500 | 550 | 69 | Proj: 65mm | H: 80mm W: 350mm |

The Madison fittings are stylish, flexible LED wall or task lights. With its high lumen output combined with its low power consumption and cool running temperature this is the ideal fitting for both domestic and commercial applications. Available in a choice of finishes.



- Constructed from steel
- 1W LED module (SMD)



| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS | |
|-------|------------------|----------------|------|----|------|-------------|------------------|
| 50605 | Madison 1lt wall | Chrome plate | 3000 | 65 | 65 | Proj: 175mm | H: 250mm W: 40mm |
| 50606 | Madison 1lt wall | Brushed chrome | 3000 | 65 | 65 | Proj: 175mm | H: 250mm W: 40mm |

PLASMA

The Plasma LED flexible wall light can be used in both domestic and commercial applications; use within the bedroom as a reading light, or in any area where you want to highlight a picture or item.



- Constructed from die cast aluminium alloy & steel
- Chrome plate finish

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|--------------|-----------------|-----------------|------|----|------|-------------|------------------|
| 11141 | Plasma 1lt wall | 1W LED Hi Power | 4000 | 95 | 95 | Proj: 130mm | H: 330mm W: 69mm |

112 INTERIOR WALL

MORO

The Moro is a stylish LED wall light which offers a four way directional wash of accent lighting. 8W LED Module delivers 720 lumens and a 4000K cool white light.



- Constructed from aluminium alloy & acrylic
- Textured matt white finish

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|--------------|---------------|---------------------|------|-----|------|------------|-------------------|
| 55595 | Moro 1lt wall | 8W LED module (SMD) | 4000 | 720 | 90 | Proj: 45mm | H: 180mm W: 180mm |

INTERIOR WALL **113**

Simple curved unglazed LED wall lights offering a wash of light both up and down the wall. Available in two sizes with a white plaster finish that can be painted to match your decor.



- White plaster finish

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|---------------------|-----------------|------|-----|------|------------------------------|
| 61639 | Toko 1lt 200mm wall | 3W LED Hi Power | 3000 | 230 | 77 | Proj: 85mm H: 120mm W: 200mm |
| 61638 | Toko 1lt 300mm wall | 3W LED Hi Power | 3000 | 230 | 77 | Proj: 95mm H: 140mm W: 300mm |

The Mini Crescent is a premium plaster wall uplighter which can be painted and stuccoed to suit your room decor or taste. The Crescent is a simple LED curved wall light with a white plaster finish. Can be painted to suit the decor of your room.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|------------------------|--------------------------|------|-----|------|-------------------------------|
| 61636 | Crescent 2lt wall | A 2 x 2W LED Hi Power | 3000 | 460 | 115 | Proj: 50mm H: 160mm W: 100mm |
| 10401 | Mini crescent 1lt wall | C 40W E27 GLS (required) | | | | Proj: 150mm H: 120mm W: 405mm |

BOX

The Box is a great choice for use in both domestic and commercial applications, with its simple boxy design it has a contemporary feel.



- Constructed from white plaster & frosted glass

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS |
|--------------|--------------|---------------|-------------------|-----------------------------|
| 10400 | Box 2lt wall | White plaster | 2 x G9 (required) | Proj: 75mm H: 75mm W: 350mm |

MORNINGTON & SALVO

The Mornington is a compact LED plaster wall fitting, with 2 x 2W Hi Power LED, directing warm white beams up and down. The unglazed finish can be painted. The Salvo is an up and down LED wall light that gives out a high light output with low energy consumption. For indoor application the unglazed finish can be painted.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|---------------------|---------------------|------|-----|------|------------------------------|
| 61635 | Mornington 2lt wall | 2 x 2W LED Hi Power | 3000 | 460 | 115 | Proj: 50mm H: 160mm W: 100mm |
| 61640 | Salvo 2lt wall | 2 x 3.5W LED GU10 | 2700 | 680 | 97 | Proj: 100mm H: 250mm W: 75mm |

DISPLAY

Our display section has a range of versatile lighting solutions that can be used in both commercial and domestic properties. The collection has everything from under cabinet/ shelf lighting, to LED tapes that can be used in the kitchen or entertainment rooms. The adaptability of these products allows you to produce bespoke lighting for a variety of applications.

CABINET 120
TAPE 124



HERA CCT

Complement any kitchen design with this set of round LED under cabinet lights with Colour Changing Technology (CCT), giving a choice of warm white or cool white at the flick of a switch. Up to 5 fittings can be connected in a daisy chain using the 1.3m link cable, access to the central connector is not required. Gain up to 30,000 hours lamp life and low maintenance costs. Satin nickel finish.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|----------------------|-------------------------------|-----------|-----|------|----------------------|
| 75925 | Hera CCT kit | 3 x 2.5W LED module (SMD) CCT | 3000/4000 | 480 | 64 | Proj: 20mm Dia: 69mm |
| 75926 | Hera CCT add-on head | 2.5W LED module (SMD) CCT | 3000/4000 | 160 | 64 | Proj: 20mm Dia: 69mm |

NYX CCT

The Nyx range is an LED, surface mounted under cabinet fitting; available as a single or complete kit of 3, with a satin nickel finish. This under cabinet fitting is available with Colour Changing Technology (CCT), giving a choice of warm white or cool white at the flick of a switch. Up to 5 fittings can be connected in a daisy chain using the 1.3m link cable, access to the central connector is not required.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|---------------------|-------------------------------|-----------|-----|------|------------------------------|
| 75927 | Nyx CCT kit | 3 x 2.5W LED module (SMD) CCT | 3000/4000 | 480 | 64 | Proj: 38mm L: 125mm W: 125mm |
| 75928 | Nyx CCT add-on head | 2.5W LED module (SMD) CCT | 3000/4000 | 160 | 64 | Proj: 38mm L: 125mm W: 125mm |

CONTROLS


Switching controls for the Hera and Nyx CCT under cabinet range. These include control touch switch (four stage dimmer), control PIR switch (on/off), control push switch (on/off) and a control IR switch (on/off).



| CODE | DESCRIPTION | DIMENSIONS |
|--------------|---------------------------------------|-------------------|
| 61657 | Control touch switch (4 stage dimmer) | H: 17mm Dia: 42mm |
| 61659 | Control PIR switch (on/off) | H: 17mm Dia: 42mm |
| 61660 | Control push switch (on/off) | H: 17mm Dia: 42mm |
| 61658 | Control IR switch (on/off) | H: 17mm Dia: 42mm |

SLEEK CCT

The Sleek is an energy efficient LED under cabinet style light, which is available in a choice of lengths to suit individual requirements. Boasting new Colour Changing Technology (CCT) with memory function, it allows the user to have a choice of three colour temperatures to suit their space. The shade has light diffusing technology giving a soft glow. These products can be directly interconnected together for a seamless line of light or use the link lead for corners and more flexible linking. Mains power lead available separately (code 75921).

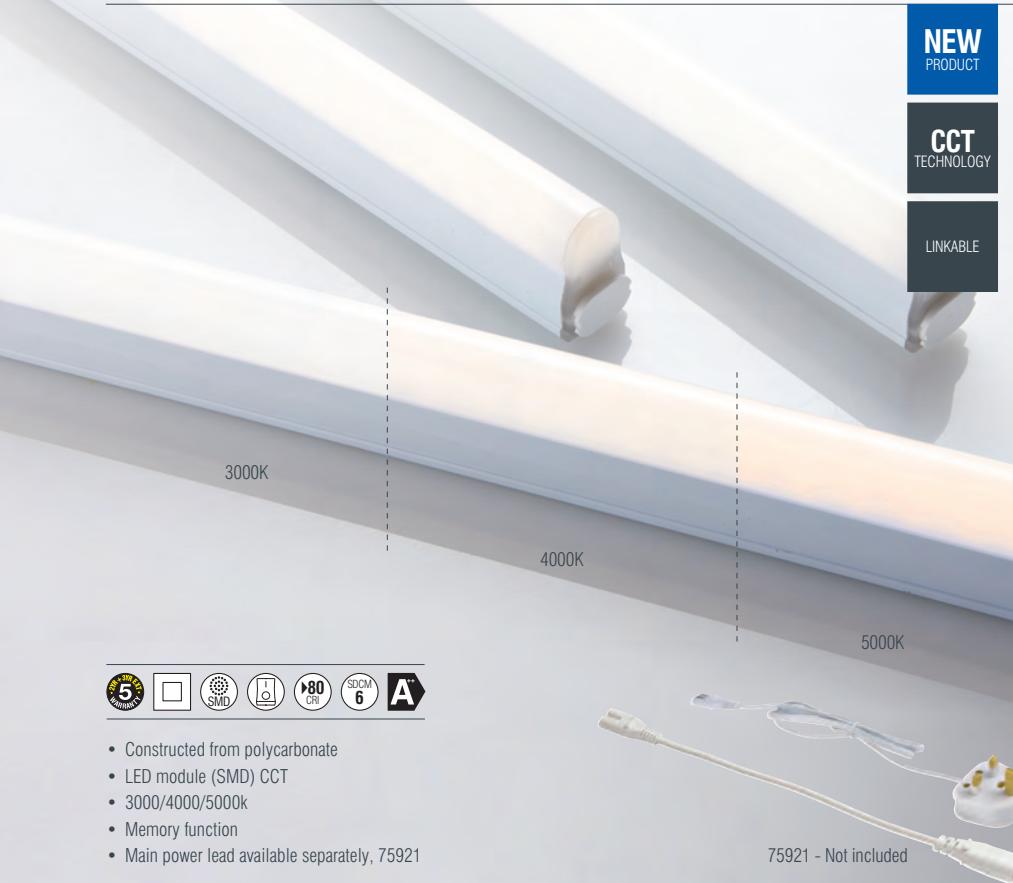

- Constructed from polycarbonate
- LED module (SMD) CCT
- 3000/4000/5000K
- Memory function
- Main power lead available separately, 75921

| CODE | DESCRIPTION | FINISH | LM | LM/W | DIMENSIONS |
|--------------|-----------------------------------|-------------------|------|------|-----------------------------|
| 75922 | Sleek CCT 300mm 5W | Gloss white | 500 | 100 | Proj: 38mm L: 305mm W: 23mm |
| 75923 | Sleek CCT 500mm 8W | Gloss white | 800 | 100 | Proj: 38mm L: 505mm W: 23mm |
| 75924 | Sleek CCT 900mm 13W | Gloss white | 1300 | 100 | Proj: 38mm L: 905mm W: 23mm |
| 69500 | Sleek link lead | White PVC plastic | | | L: 440mm |
| 75921 | Sleek CCT power lead & 3 pin plug | White PVC plastic | | | L: 1000mm |

AQUALINE CCT KIT

IP44, flexible LED strip lighting kit, using Colour Changing Technology (CCT). Energy efficient and easy to install. The 24W LEDs produce up to 2500 lumens per kit of warm white through to cool white light, dimmable at the press of a button using the supplied remote control. Ideal for outdoor areas and bathrooms.



- Constructed from white polymer film
- 24W LED tape module (SMD) CCT
- Cut to required length

Kit contents: 1 x plug in 24W driver with UK 3 pin plug, 1 x 5000mm strip, tube cover, 1 x remote control, 1 x receiver with 2m cable, 20 x fixing clips, 40 x screws

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|--------------|------------------------------|----------------|------|------|-----------------------------|
| 73668 | Aqualine 5m kit CCT IP44 24W | 2900/4500/6000 | 2500 | 104 | L: 5000mm W: 12mm Proj: 4mm |

AQUALINE KIT

IP65, flexible LED strip lighting kit. Energy efficient and easy to install. Available in a choice of colour, RGB and Colour Changing Technology (CCT). Ideal for outdoor areas and bathrooms.



- Constructed from white polymer film
 - 12W LED tape module (SMD)
 - Cut to required length
- Kit contents: 1 x plug in 12W driver with UK 3 pin plug, 1 x 5000mm strip, tube cover, 20 x fitting clips, 40 x screws

| CODE | DESCRIPTION | LAMP TEMP | K | LM | LM/W | DIMENSIONS |
|--------------|--------------------------|----------------|------|------|------|-----------------------------|
| 73710 | Aqualine 5m kit IP65 12W | Warm white | 3000 | 1260 | 105 | L: 5000mm W: 10mm Proj: 4mm |
| 73711 | Aqualine 5m kit IP65 12W | Daylight white | 6000 | 1260 | 105 | L: 5000mm W: 10mm Proj: 4mm |

AQUALINE RGB KIT

The Aqualine premium kit has all the functionality you could want from an RGB LED flexible strip light, strobing, pulsing, multiple colours and many more. The kit is 12V, water resistant and easy to install using the self adhesive backing. Flexible and suitable for use indoors; an ideal choice for setting mood within the kitchen, bathroom or any indoor environment. Premium version 51918 has colour chasing function.



| CODE | DESCRIPTION | DIMENSIONS |
|-------|--|-----------------------------|
| 51918 | Aqualine 12V premium 5m RGB kit IP44 24W | L: 5000mm W: 10mm Proj: 3mm |
| 73669 | Aqualine 5m kit RGB IP44 24W | L: 5000mm W: 12mm Proj: 4mm |

FLEXLINE RGB KIT

RGB flexible LED strip lighting kit. Energy efficient and easy to install. The 24W LEDs offer multi colours and functions using the supplied remote control. Ideal for kitchens, creating mood lighting indoors and illuminating cabinets.



| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|-------|---------------------|--------------------------|-------------------------------|
| 73667 | Flexline 5m kit RGB | 24W LED module (SMD) RGB | L: 5000mm W: 10mm Proj: 2.5mm |

FLEXLINE CCT KIT

Flexible LED strip lighting kit, using Colour Changing Technology (CCT). Energy efficient and easy to install. The 24W LEDs produce up to 2500 lumens of warm white through to cool white light at the press of a button using the supplied remote control. Ideal for kitchens, creating mood lighting indoors and illuminating cabinets.



- Constructed from white polymer film
- 24W LED tape module (SMD) CCT
- Cut to required length

Kit contents: 1 x in-line 24W driver with UK 3 pin plug (0.5 mains & 1.5m LV), 1 x 5000mm, 1 x remote control, 1 x receiver



Full colour control from warm white to daylight white.

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|-------------------------|----------------|------|------|-------------------------------|
| 73666 | Flexline 5m kit CCT 24W | 2900/4500/6000 | 2500 | 104 | L: 5000mm W: 10mm Proj: 2.5mm |

FLEXLINE KIT

Flexline is an indoor LED tape; an energy efficient, adaptable and flexible lighting solution. With its flexible polymer PCB and adhesive backing, it is perfect for accent lighting or mood lighting; use it on bookshelves to highlight ornaments and in kitchens for fully flexible lighting. This complete kit includes everything you need for a quick and easy installation.




- Constructed from white polymer film
- 12W LED module (SMD)
- Cut to required length

Kit includes: 1 x in-line driver with UK 3 pin plug & 0.5m mains cable, 1 x 1.5m extension cable, 1 x 5m strip with 150 SMD 3528

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|---------------------|----------------|------|------|------|------------------------------|
| 52305 | Flexline 5m kit 12W | Warm white | 3000 | 1260 | 105 | L: 5000mm W: 8mm Proj: 2.5mm |
| 52306 | Flexline 5m kit 12W | Daylight white | 6500 | 1260 | 105 | L: 5000mm W: 8mm Proj: 2.5mm |

REGEN 24V

The Regen is an IP65 rated, LED flexible strip light, which is easy to install using the self adhesive backing. It is an energy efficient but high lumen output range which offers an adaptable and flexible solution suitable for use indoors or out; an ideal choice for setting mood within the bathroom or adding a touch of colour to outside decking. Available in warm white or cool white and accessories sold separately.

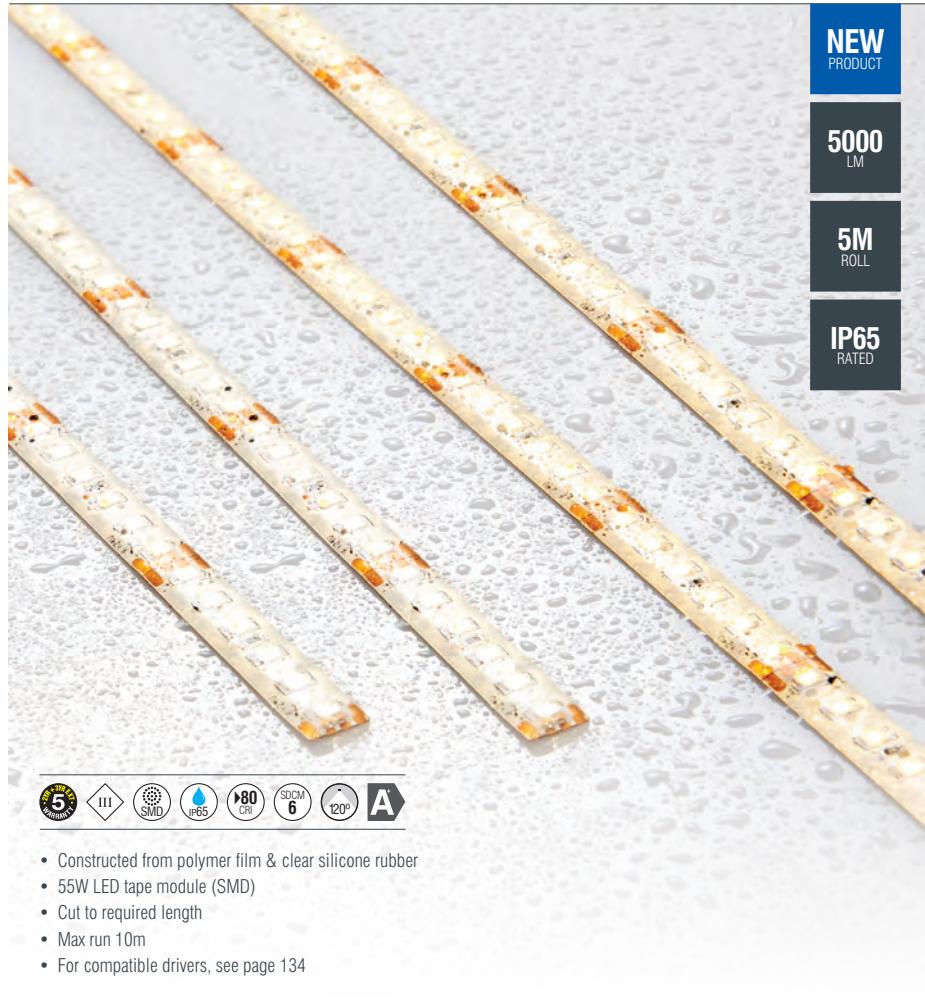

| CODE | DESCRIPTION | LAMP TEMP | K | LM | LM/W | DIMENSIONS | |
|-------|-------------------|------------|------|------|------|------------|-------------------|
| 79317 | Regen 5m IP65 55W | Warm white | 3300 | 5000 | 91 | L: 5000mm | W: 10mm Proj: 2mm |
| 79318 | Regen 5m IP65 55W | Cool white | 4000 | 5000 | 91 | L: 5000mm | W: 10mm Proj: 2mm |

TROCKEN 24V

The Trocken is an IP20 rated, LED tape in a warm white or cool white colour temperature. This product is energy efficient, adaptable and flexible to suit your lighting requirements. With its flexible shape and high quality adhesive backing, it's easy to install & is ideal for accent or mood lighting around your home or commercial space. Accessories sold separately.



| CODE | DESCRIPTION | LAMP TEMP | K | LM | LM/W | DIMENSIONS | |
|-------|----------------|------------|------|------|------|------------|---------------------|
| 79315 | Trocken 5m 34W | Warm white | 3000 | 3000 | 88 | L: 5000mm | W: 10mm Proj: 1.1mm |
| 79316 | Trocken 5m 34W | Cool white | 4000 | 3000 | 88 | L: 5000mm | W: 10mm Proj: 1.1mm |

REGEN ACCESSORIES

IP44 LED tape accessories, to be used with the Regen products.



- Constructed from PVC plastic

| CODE | DESCRIPTION | DIMENSIONS |
|--------------|--|------------------------------|
| 79324 | Regen connector for tape to driver IP44 | Proj: 7.3mm L: 175mm W: 15mm |
| 79325 | Regen connector for tape to tape IP44 | Proj: 7.3mm L: 20mm W: 15mm |
| 79326 | Regen accessory pack | |
| 79327 | Regen flexible connector for tape to tape IP44 | Proj: 7.3mm L: 195mm W: 15mm |

TROCKEN ACCESSORIES

IP20 LED tape accessories, to be used with the Trocken products.



- Constructed from FPC+PA

| CODE | DESCRIPTION | DIMENSIONS |
|--------------|---|----------------------------|
| 79319 | Trocken connector for tape to driver | Proj: 5mm L: 165mm W: 15mm |
| 79320 | Trocken connector for tape to tape | Proj: 5mm L: 15mm W: 15mm |
| 79321 | Trocken T connector | Proj: 5mm L: 185mm W: 15mm |
| 79322 | Trocken X connector | Proj: 5mm L: 45mm W: 45mm |
| 79323 | Trocken flexible connector for tape to tape | Proj: 5mm L: 185mm W: 15mm |



| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|--------------|--|----------------------|--------------------------|
| 79682 | LED driver constant voltage 24V 20W | 2 Red polycarbonate | H: 28mm W: 44mm L: 113mm |
| 79328 | LED driver constant voltage 24V 40W | 2 Opal polycarbonate | H: 24mm W: 52mm L: 166mm |
| 79329 | LED driver constant voltage 24V 75W | 2 Opal polycarbonate | H: 32mm W: 61mm L: 184mm |
| 79681 | LED driver constant voltage 24V 150W | 2 Opal polycarbonate | H: 34mm W: 67mm L: 210mm |
| 79332 | LED driver constant voltage 24V 25W | 2 Opal polycarbonate | H: 30mm W: 52mm L: 128mm |
| 79333 | LED driver constant voltage 24V 50W | 2 Opal polycarbonate | H: 32mm W: 61mm L: 184mm |
| 79334 | LED driver constant voltage 24V 100W | 2 Opal polycarbonate | H: 34mm W: 67mm L: 210mm |
| 79330 | LED driver constant voltage IP67 24V 75W IP67 | 2 Aluminium | H: 39mm W: 64mm L: 186mm |
| 79331 | LED driver constant voltage IP67 24V 150W IP67 | 2 Aluminium | H: 40mm W: 70mm L: 191mm |

The aluminium profile range offers a choice of recessed, surfaced and corner mount options. With a limitless application this easy to install aluminium extrusion profile range, benefits from having a push on polycarbonate diffuser which effectively conceals the LED tape and gives a softer lighting effect. Ideal for use in living rooms, cove lighting and under cabinet.



- Constructed from aluminium alloy & polycarbonate
- Supplied with fitting clips and end caps, with and without holes

| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|--------------|------------------------|-------------------------------|----------------------------------|
| 80497 | Surface profile (slim) | 2 Silver & opal polycarbonate | Proj: 9mm W: 17mm L: 2000mm |
| 80498 | Surface profile | 2 Silver & opal polycarbonate | Proj: 13.5mm W: 16.5mm L: 2000mm |
| 80499 | Recessed profile | 2 Silver & opal polycarbonate | Proj: 13.4mm W: 23.1mm L: 2000mm |
| 80500 | Plaster-in profile | 2 Silver & opal polycarbonate | Proj: 15.4mm W: 56.9mm L: 2000mm |
| 80501 | Corner profile | 2 Silver & opal polycarbonate | Proj: 16mm W: 16mm L: 2000mm |
| 73671 | Corner profile | 2 Silver & opal polycarbonate | Proj: 19mm W: 19mm L: 1000mm |


BATHROOM

Saxby Lighting boasts a range of bathroom lights that are appropriate for various bathroom zones. These come in an array of designs, finishes and colour temperatures to suit your lighting requirements. There's everything from spotlights to shaver mirrors.

| | |
|------------|-----|
| SPOTLIGHTS | 138 |
| COLLECTION | 140 |
| FLUSH | 143 |
| MIRROR | 146 |
| WALL | 154 |



The Knight range combines a polished chrome finish, sleek design and functional form. This range of bathroom spotlights includes single, triple and bar options all of which are suitable for use with LED lamps.

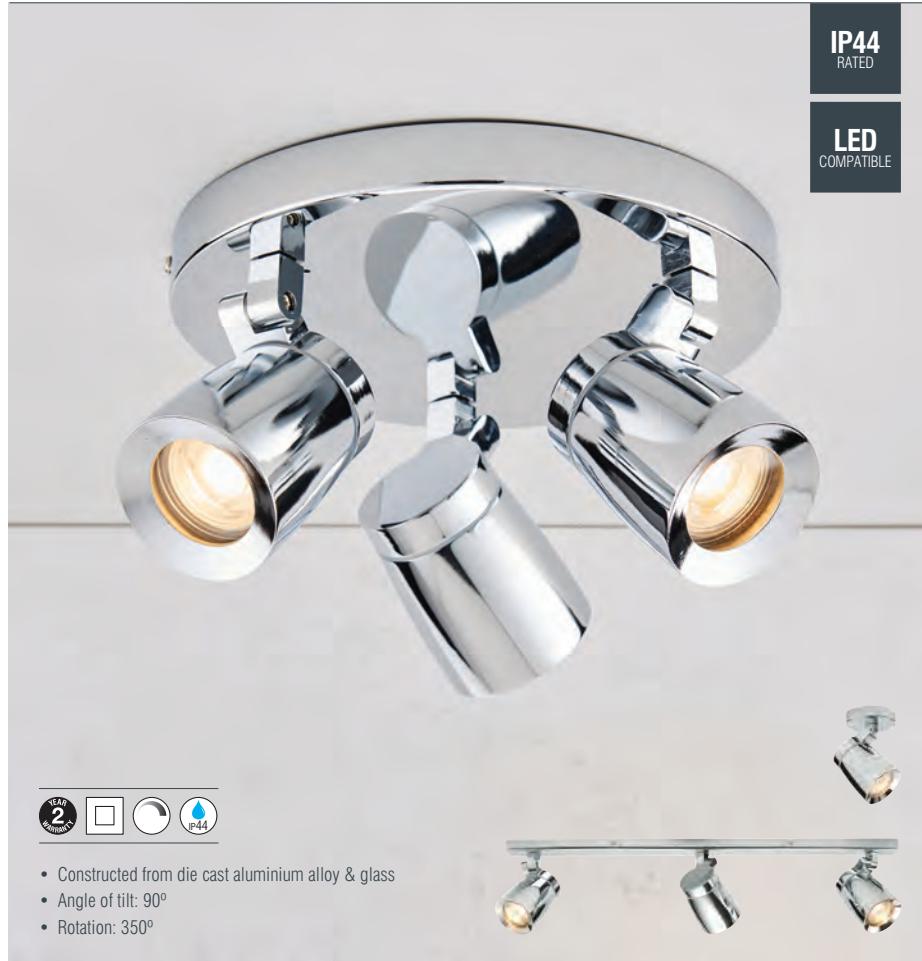

- Constructed from die cast aluminium alloy & glass
- Angle of tilt: 90°
- Rotation: 350°

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS |
|-------|-----------------------|--------------|---------------------|------------------------------|
| 39166 | Knight 1lt plate IP44 | Chrome plate | GU10 (required) | Proj: 140mm Dia: 90mm |
| 39167 | Knight 3lt round IP44 | Chrome plate | 3 x GU10 (required) | Proj: 140mm Dia: 240mm |
| 39168 | Knight 3lt plate IP44 | Chrome plate | 3 x GU10 (required) | Proj: 140mm L: 600mm W: 50mm |

PURE

A popular range of bathroom fittings finished in chrome effect plate with matt opal glass shades. The smooth curved lines of the Pure ceiling light provides a touch of elegance and style, ideal for any contemporary or classic bathroom. The soft chrome finishing and diffused glass shades provides the perfect blend of sophisticated style and effective lighting.



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS |
|-------|---------------------|--------------|-----------------------|-----------------------------|
| 34200 | Pure 3lt flush IP44 | Chrome plate | 3 x G9 (required) | Proj: 90mm Dia: 280mm |
| 34483 | Pure 1lt wall IP44 | Chrome plate | E14 candle (required) | Proj: 80mm H: 210mm W: 85mm |

CRYSTAL

Stunning and chic, the Crystal lights are the perfect choice for making a feature piece in any luxury bathroom. IP44 rated, ensuring protection against the intrusion of water & compatible with LED lamps, these fittings can be both energy efficient as well as stylish.



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS |
|-------|------------------------|--------------|-------------------|-----------------------------|
| 35612 | Crystal 5lt flush IP44 | Chrome plate | 5 x G9 (required) | Proj: 130mm Dia: 345mm |
| 39629 | Crystal 2lt wall IP44 | Chrome plate | 2 x G9 (required) | Proj: 75mm H: 260mm W: 85mm |

Sleek and simple in design, the Lipco is a medium sized LED flush ceiling light finished with a chrome effect trim. It is IP44 rated and suitable for use in the bathroom.



- Constructed from steel
- Chrome plate finish

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|----------------------------|------|----------------------|------|------|------------|
| 72456 | Lipco round LED flush IP44 | A | 15W LED module (SMD) | 3000 | 1050 | 70 |
| 39608 | Lipco 1lt wall IP44 | A | 28W G9 (required) | 3000 | 1050 | 70 |

The solid lines of the Cubita LED fitting combined with a chrome effect trim makes this the perfect choice for the contemporary bathroom. Featuring a quick release clip system for fast effective installation and lamp replacement.



- Constructed from steel & matt white acrylic
- Chrome plate finish

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|------------------------------|------|-------------------------------|------|------|----------------------|
| 72457 | Cubita square LED flush IP44 | A | 15W LED module (SMD) | 3000 | 1050 | 70 |
| 28679 | Cubita square flush HF IP44 | | 28W GR10q 2D 4 pin (required) | | | Proj: 78mm Sq: 290mm |

PORTICO

A range of simple flush bathroom lights available as LED or standard, and with a choice of chrome or satin nickel finishes.



- Constructed from steel & frosted glass

| CODE | DESCRIPTION | FINISH | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|------------------------|----------------|---------------------|------|-----|------|-----------------------|
| 12421 | Portico flush IP44 | Satin nickel | E27 GLS (required) | | | | Proj: 80mm Dia: 300mm |
| 54675 | Portico LED flush IP44 | A Satin nickel | 9W LED module (SMD) | 4000 | 650 | 72 | Proj: 85mm Dia: 300mm |
| 54676 | Portico LED flush IP44 | A Chrome plate | 9W LED module (SMD) | 4000 | 650 | 72 | Proj: 85mm Dia: 300mm |
| 59850 | Portico flush IP44 | Chrome plate | E27 GLS (required) | | | | Proj: 80mm Dia: 300mm |

NOBLE

Super slim, silver LED flush light with an IP44 rating. The SMD module produces a powerful 1900 lumens, ideal for commercial or residential use. The Noble can be wall or ceiling mounted and is available in square or round.



- Constructed from polycarbonate & die cast aluminium alloy
- Silver finish

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|-------------------------------|----------------------|------|------|------|-----------------------|
| 54479 | Noble 300mm round flush IP44 | 22W LED module (SMD) | 4000 | 1900 | 86 | Proj: 45mm Dia: 300mm |
| 54487 | Noble 300mm square flush IP44 | 22W LED module (SMD) | 4000 | 1900 | 86 | Proj: 45mm Sq: 300mm |

NICO

The Nico LED bathroom mirror features a demisting pad and a motion sensor to switch the two strips of LEDs on or off, also includes a built in dual shaver socket. Simple and easy to fit without dismantling the fitting.



IP44
RATED
DUAL
SHAVER
SOCKET
DEMIST
FUNCTION
MOTION
SENSOR



- Constructed from mirrored glass & steel
- Matt silver finish
- 115V - 240V dual socket

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|-------------------------|----------------------|------|-----|------|------------------------------|
| 60899 | Nico shaver mirror IP44 | 10W LED module (SMD) | 4000 | 480 | 48 | H: 700mm W: 500mm Proj: 55mm |

PERLE

The Perle LED mirror is contemporary in design, adding a touch of style to any bathroom. This rectangular mirror features white LEDs neatly positioned around the mirror to provide a sharp, crisp light. Additional features include a built in shaver socket and a motion sensor to switch the mirror on & off.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|--------------------------|---------------------------|------|-----|------|------------------------------|
| 13760 | Perle shaver mirror IP44 | 2 x 4.8W LED module (SMD) | 6500 | 320 | 33 | H: 600mm W: 500mm Proj: 50mm |

SPEGEL

Spegel is a stunning LED bathroom mirror which features a motion sensor to switch the mirror on & off and comes complete with built in shaver socket.



- Constructed from mirrored glass & steel
- Matt silver finish
- 115V - 240V dual socket

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|--|------|-----|----|------|------------------------------|
| 13759 | Spegel shaver mirror IP44 2 x 3.85W LED module (SMD) | 6500 | 215 | 28 | | H: 600mm W: 500mm Proj: 50mm |

RIFT

The Rift LED bathroom mirror features a demisting pad and a motion sensor to switch the two strips of LEDs on or off. The mirror also includes a built in dual shaver socket.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|--------------|-------------------------|------|-----|------|------------------------------|
| 60895 | Rift shaver mirror IP44 | 6000 | 650 | 232 | H: 500mm W: 650mm Proj: 55mm |

A truly contemporary mirror, the Glimpse will add a touch of style to any bathroom. This LED version is the ideal way to have an energy efficient as well as stylish and practical fitting. Also features a built in shaver socket.



- Constructed from mirrored glass & steel
- Matt silver finish
- 115V - 240V dual socket

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|-------|----------------------------|-------------------------|------|-----|------|------------|---------------------|
| 72360 | Glimpse shaver mirror IP44 | 2 x 4W LED module (SMD) | 4150 | 240 | 30 | H: 500mm | W: 390mm Proj: 50mm |

The Mareh is a beautifully simple bathroom mirror fitted with a pull cord switch and 32 white LEDs.



- Constructed from mirrored glass & steel
- Matt silver finish

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|-------|-------------------|-----------------|------|-----|------|------------|---------------------|
| 13758 | Mareh mirror IP44 | 5.12W LED (SMD) | 6500 | 160 | 31 | H: 500mm | W: 390mm Proj: 50mm |

The Omega LED bathroom mirror combines style and function. Featuring a motion sensor to switch the mirror on/off and comes complete with heated demister pad, lit glass shelf and shaver socket.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|--------------------------|---------------------------|------|----|------|-------------------------------|
| 39237 | Omega shaver mirror IP44 | 2 x 1.5W LED module (SMD) | 6500 | 60 | 20 | H: 500mm W: 390mm Proj: 150mm |


The Revelo LED cabinet mirror includes two shelves and features a motion sensor to switch the LEDS on & off; also includes a built in dual shaver socket.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|-----------------------------------|---------------------------|------|-----|------|-------------------------------|
| 60894 | Revelo shaver cabinet mirror IP44 | 2 x 5.1W LED module (SMD) | 6000 | 700 | 69 | H: 600mm W: 650mm Proj: 110mm |

ICE & SQUARE

The curved lines of the Ice wall fitting mixed with chrome and a diffused glass shade make this light the ideal choice for the classic bathroom. Intense straight lines and boxy design, combined with the chrome and opal glass finish make the Square wall light the perfect choice for achieving a minimalist contemporary feel.

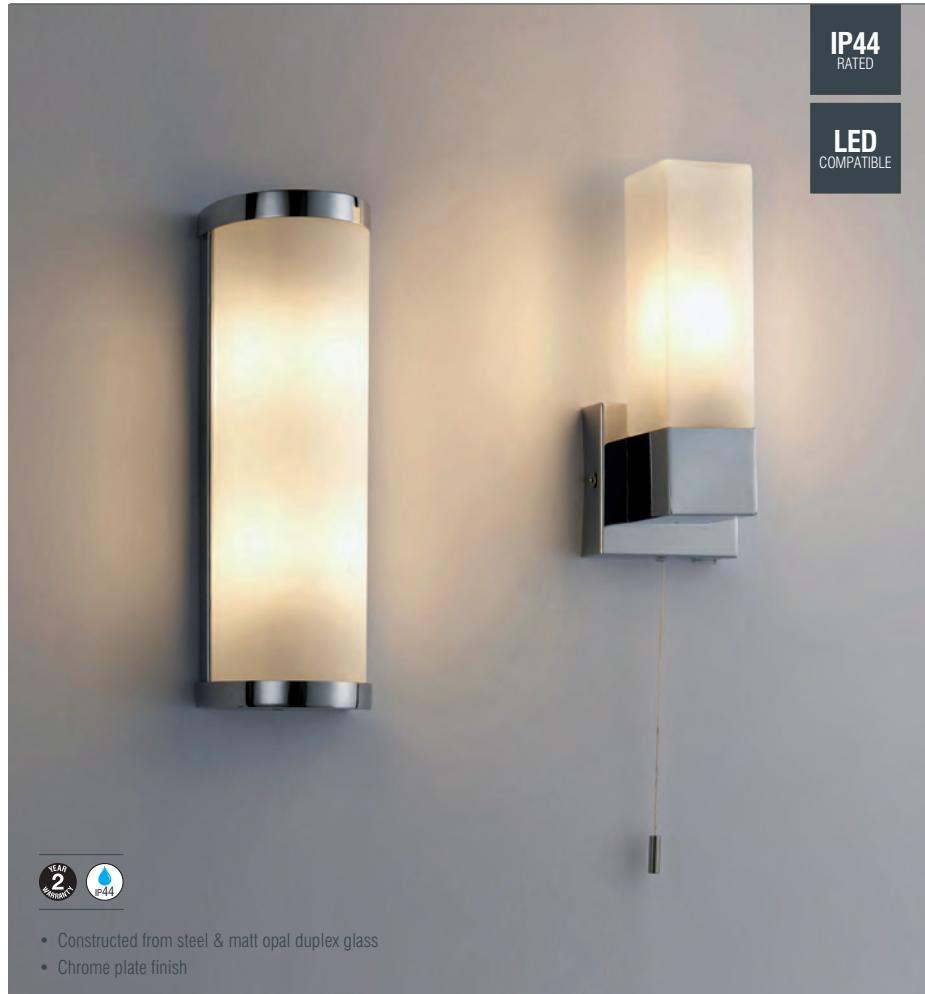

| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|-------|----------------------|-------------------------------------|--|
| 39363 | Ice 2lt wall IP44 | <input type="checkbox"/> | 2 x G9 (required) Proj: 75mm H: 250mm W: 85mm |
| 39627 | Square 1lt wall IP44 | <input checked="" type="checkbox"/> | E14 candle (required) Proj: 75mm H: 195mm W: 80mm |


MODA & AXIS

The Moda will allow you to create the designer bathroom look without the high price tag. This smart clean line, injection moulded over mirror wall lights constructed from chrome plated polymer, with integrated LED light source and opal diffuser. The minimalist Axis wall light features a chrome finish and is the perfect fitting for any modern bathroom. IP44 rated and designed with an integrated LED module, it will introduce a wash of bright light into your space.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|---------------------------|---------------------|------|-----|------|------------------------------|
| 76657 | Moda round 1lt wall IP44 | 8W LED module (SMD) | 6500 | 640 | 80 | Proj: 132mm H: 42mm L: 400mm |
| 76658 | Axis square 1lt wall IP44 | 8W LED module (SMD) | 6500 | 640 | 80 | Proj: 120mm H: 42mm W: 400mm |

The Moda is the ideal modern lighting solution in your bathroom. This IP44 rated fitting combines style and functionality, with integrated 15W LED module that will create a bright lighting effect in your space.

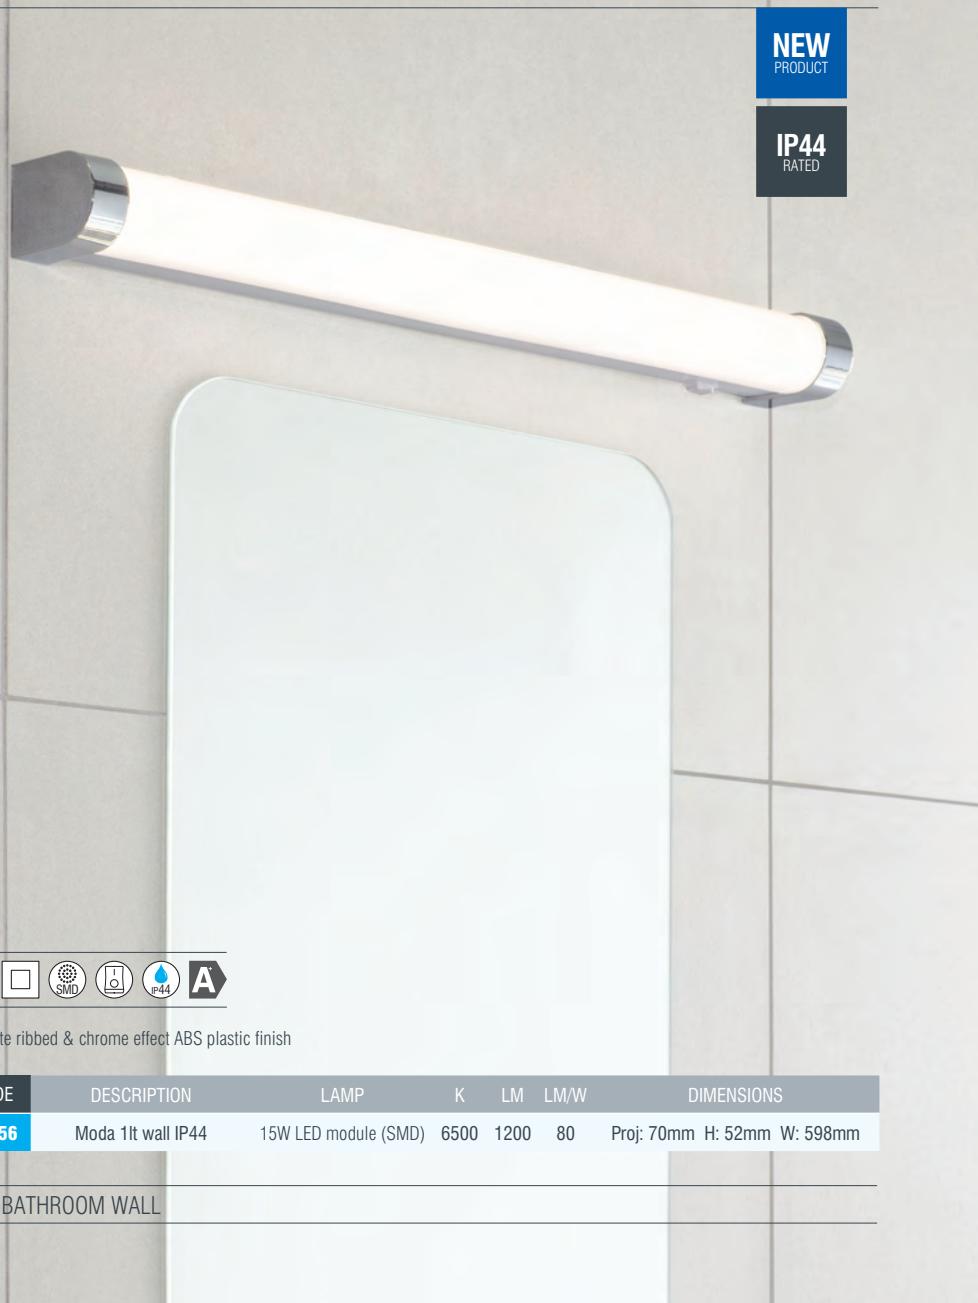

The Onan LED shaver lights have been exclusively designed by our in house team. These sleek and curved yet functional LED shaver lights come in a choice of white or chrome and emit a bright, clear light. The shaver socket is covered by a spring loaded flap ensuring the IP44 rating is maintained when the socket is not in use. The voltage output can be switched between 115V and 240V. Supplied with a pull cord switch. Designed for quick and easy installation as well as looks and functionality.



| CODE | DESCRIPTION | LAMP | FINISH | K | LM | LM/W | DIMENSIONS |
|--------------|------------------|-------------------------|--------|------|-----|------|-----------------------------|
| 68930 | Onan shaver IP44 | 2 x 6W LED module (SMD) | Chrome | 4200 | 600 | 50 | Proj: 70mm H: 80mm W: 520mm |
| 70443 | Onan shaver IP44 | 2 x 6W LED module (SMD) | White | 4200 | 600 | 50 | Proj: 70mm H: 80mm W: 520mm |

PANELLO

The Panello light with built in shaver socket is the ideal practical choice for any bathroom.



| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|--------------|----------------|-----------------------------|------------------------------|
| 39913 | Panello shaver | 2 x 25W E14 golf (required) | Proj: 80mm H: 100mm W: 510mm |

CONVESO

The Convesso is a curved wall light with built in shaver socket, frosted white glass and chrome trim. Functional yet stylish, this shaver light is perfect for the task in hand.



| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|--------------|-----------------|-----------------------------|------------------------------|
| 39148 | Convesso shaver | 2 x 25W E14 golf (required) | Proj: 80mm H: 100mm W: 510mm |



EXTERIOR

Our extensive range of outdoor lights contains everything from bollards to wall lights to decking lights, we have it all. Our products are suited for an array of budgets and offer practicality and functionality as well as style.

| | |
|------------|-----|
| COLLECTION | 162 |
| WALL | 186 |
| BOLLARD | 206 |
| FLOODLIGHT | 208 |
| BULKHEAD | 214 |
| GUIDE | 225 |
| DECKING | 234 |
| RECESSED | 240 |
| SPIKE | 245 |

The Palin range gives a stunning designer look at an affordable price. It boasts a variety of options such as wall and spotlights as well as PIR versions. Comes in a brushed stainless steel (304) finish.



| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|-------|-------------------------|---------------------|------------------------------|
| 13801 | Palin 1lt wall IP44 | GU10 (required) | Proj: 95mm H: 120mm W: 85mm |
| 13802 | Palin 2lt wall IP44 | 2 x GU10 (required) | Proj: 95mm H: 160mm W: 85mm |
| 75431 | Palin PIR 1lt wall IP44 | GU10 (required) | Proj: 110mm H: 148mm W: 68mm |
| 75430 | Palin PIR 2lt wall IP44 | 2 x GU10 (required) | Proj: 110mm H: 210mm W: 68mm |
| 13797 | Palin 610mm spike IP44 | GU10 (required) | H: 610mm W: 90mm D: 145mm |
| 13914 | Palin 310mm spike IP44 | GU10 (required) | H: 310mm W: 90mm D: 145mm |

The Palin range gives a stunning designer look at an affordable price. It boasts a variety of options such as wall and spotlights as well as PIR versions. Comes in a brushed stainless steel (304) finish.



PALIN BLACK

The Palin range gives a stunning designer look at an affordable price. It boasts a variety of options such as wall and spotlights as well as PIR versions.



| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|-------|--------------------------|---------------------|--------------------------------|
| 75434 | Palin 1lt wall IP44 | GU10 (required) | Proj: 95mm H: 120mm W: 85mm |
| 75432 | Palin 2lt wall IP44 | 2 x GU10 (required) | Proj: 95mm H: 156mm W: 85mm |
| 75435 | Palin PIR 1lt wall IP44 | GU10 (required) | Proj: 110mm H: 150mm W: 70mm |
| 75433 | Palin PIR 2lt wall IP44 | 2 x GU10 (required) | Proj: 110mm H: 210mm W: 68mm |
| 75436 | Palin spot wall IP44 | GU10 (required) | Proj: 160mm Dia: 85mm H: 130mm |
| 75437 | Palin 2lt spot wall IP44 | 2 x GU10 (required) | Proj: 165mm W: 220mm H: 125mm |
| 75438 | Palin 310mm spike IP44 | GU10 (required) | H: 330mm W: 95mm D: 160mm |

PALIN WHITE

The Palin range gives a stunning designer look at an affordable price. It boasts a variety of options such as wall and spotlights as well as PIR versions.



| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|-------|--------------------------|-------------------------|--------------------------------|
| 75441 | Palin 1lt wall IP44 | LED GU10 (required) | Proj: 95mm H: 120mm W: 85mm |
| 75439 | Palin 2lt wall IP44 | 2 x LED GU10 (required) | Proj: 95mm H: 156mm W: 85mm |
| 75442 | Palin PIR 1lt wall IP44 | LED GU10 (required) | Proj: 110mm H: 150mm W: 70mm |
| 75440 | Palin PIR 2lt wall IP44 | 2 x LED GU10 (required) | Proj: 110mm H: 210mm W: 68mm |
| 75443 | Palin spot wall IP44 | LED GU10 (required) | Proj: 160mm Dia: 85mm H: 130mm |
| 75444 | Palin 2lt spot wall IP44 | 2 x LED GU10 (required) | Proj: 165mm W: 220mm H: 125mm |

The simple design of the Atlantis makes this range a great choice for any outdoor environment. Manufactured from marine grade stainless steel (316L) these fittings are ideally suited to coastal or industrial environments. Suitable for use with LED lamps. Standard & PIR options available on single and twin wall lights.



| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|-------|----------------------------|---------------------|---------------------------------|
| 14016 | Atlantis 1lt wall IP65 | GU10 (required) | Proj: 95mm H: 110mm W: 75mm |
| 14015 | Atlantis 2lt wall IP65 | 2 x GU10 (required) | Proj: 95mm H: 170mm W: 75mm |
| 75429 | Atlantis PIR 1lt wall IP44 | GU10 (required) | Proj: 105mm H: 150mm W: 70mm |
| 73445 | Atlantis PIR 2lt Wall IP44 | 2 x GU10 (required) | Proj: 110mm H: 215mm W: 70mm |
| 14017 | Atlantis spot wall IP65 | GU10 (required) | Proj: 160mm Dia: 80mm |
| 73446 | Atlantis 2lt Spot IP65 | 2 x GU10 (required) | Proj: 160mm Dia: 130mm H: 120mm |

The simple design of the Atlantis makes this range a great choice for any outdoor environment. Manufactured from marine grade stainless steel (316L) these fittings are ideally suited to coastal or industrial environments. Suitable for use with LED lamps. Standard & PIR options available on single and twin wall lights.



ODYSSEY

The Odyssey range is a premium exterior fittings. Available in a choice of wall, post and spike options all of which are suitable for use with LED lamps. A variety of finish options are available.



- Constructed from stainless steel (304) or aluminium alloy & glass

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS |
|-----------------|------------------------|-------------------------|---------------------|-----------------------------|
| ST5009SS | Odyssey 1lt wall IP65 | Brushed stainless steel | GU10 (required) | Proj: 95mm H: 110mm W: 80mm |
| ST5009BK | Odyssey 1lt wall IP65 | Satin black | GU10 (required) | Proj: 95mm H: 110mm W: 80mm |
| ST5009W | Odyssey 1lt wall IP65 | Gloss white | GU10 (required) | Proj: 95mm H: 110mm W: 80mm |
| ST5008S | Odyssey 2lt wall IP65 | Brushed stainless steel | 2 x GU10 (required) | Proj: 95mm H: 160mm W: 80mm |
| ST5008BK | Odyssey 2lt wall IP65 | Satin black | 2 x GU10 (required) | Proj: 95mm H: 160mm W: 80mm |
| ST5008W | Odyssey 2lt wall IP65 | Gloss white | 2 x GU10 (required) | Proj: 95mm H: 160mm W: 80mm |
| ST5010S | Odyssey spot wall IP65 | Brushed stainless steel | GU10 (required) | Proj: 160mm Dia: 80mm |
| 78667 | Odyssey spot Wall IP65 | Satin black | GU10 (required) | Proj: 160mm Dia: 80mm |
| ST5010W | Odyssey spot wall IP65 | Gloss white | GU10 (required) | Proj: 160mm Dia: 80mm |

ODYSSEY SPIKE

An outdoor spike from the Odyssey range with a brushed stainless steel (304) finish, offering a stunning designer look at an affordable price. Perfect for lighting walls, signs and features.



- Constructed from stainless steel (304) & glass

| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|---------------|--------------------|-----------------|--------------------|
| ST5011 | Odyssey spike IP65 | GU10 (required) | H: 315mm Dia: 63mm |

ICARUS BLACK

Outdoor wall lights available in single and twin, with and without a PIR sensor. Constructed from polypropylene, making the Icarus range a hard wearing, impact resistant fitting which is ideal in harsh environments. Suitable for coastal areas.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-----------------|--------------------------|--------------------------|------|-----|------|------------------------------|
| EL-40053 | Icarus 1lt wall IP44 | 2.5W LED GU10 (Included) | 6500 | 200 | 80 | Proj: 90mm H: 120mm W: 80mm |
| EL-40054 | Icarus 2lt wall IP44 | 2.5W LED GU10 (Included) | 6500 | 400 | 80 | Proj: 90mm H: 160mm W: 80mm |
| EL-40122 | Icarus PIR 1lt wall IP44 | 2.5W LED GU10 (Included) | 6500 | 200 | 80 | Proj: 110mm H: 150mm W: 75mm |
| EL-40123 | Icarus PIR 2lt wall IP44 | 2.5W LED GU10 (Included) | 6500 | 400 | 80 | Proj: 110mm H: 210mm W: 75mm |

ICARUS WHITE

Outdoor wall lights available in single and twin, with and without a PIR sensor. Constructed from polypropylene, making the Icarus range a hard wearing, impact resistant fitting which is ideal in harsh environments. Suitable for coastal areas.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|--------------------------|--------------------------|------|-----|------|------------------------------|
| 61004 | Icarus 1lt wall IP44 | 2.5W LED GU10 (Included) | 6500 | 200 | 80 | Proj: 90mm H: 120mm W: 80mm |
| 61005 | Icarus 2lt wall IP44 | 2.5W LED GU10 (Included) | 6500 | 400 | 80 | Proj: 90mm H: 160mm W: 80mm |
| 61006 | Icarus PIR 1lt wall IP44 | 2.5W LED GU10 (Included) | 6500 | 200 | 80 | Proj: 110mm H: 150mm W: 75mm |
| 61007 | Icarus PIR 2lt wall IP44 | 2.5W LED GU10 (Included) | 6500 | 400 | 80 | Proj: 110mm H: 210mm W: 75mm |

LOUVRE STAINLESS STEEL

The Louvre range is a robust collection of fittings, with an IP44 rating and fitted with vandal resistant diffusers making it ideal for commercial and domestic properties. Matching products available.



| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|-------------------|--------------------------|--------------------|-------------------------------|
| YG-6001-SS | Louvre 1lt wall IP44 | E27 GLS (required) | Proj: 195mm H: 320mm W: 150mm |
| 72381 | Louvre PIR 1lt wall IP44 | E27 GLS (required) | Proj: 220mm H: 340mm W: 150mm |
| YG-6002-SS | Louvre post IP44 | E27 GLS (required) | H: 650mm Dia: 150mm |
| YG-6003-SS | Louvre bollard IP44 | E27 GLS (required) | H: 1000mm Dia: 150mm |

LOUVRE BLACK

The Louvre range is a robust collection of fittings, with an IP44 rating and fitted with vandal resistant diffusers making it ideal for commercial and domestic properties. Matching products available.



| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|-------------------|--------------------------|--------------------|-------------------------------|
| 72385 | Louvre 1lt wall IP44 | E27 GLS (required) | Proj: 175mm H: 350mm W: 150mm |
| 72384 | Louvre PIR 1lt wall IP44 | E27 GLS (required) | Proj: 175mm H: 350mm W: 150mm |
| CH201E27BK | Louvre post IP44 | E27 GLS (required) | H: 650mm Dia: 170mm |
| CH200E27BK | Louvre bollard IP44 | E27 GLS (required) | H: 1000mm Dia: 170mm |

EQUINOX LED

The Equinox is a stylish addition to our outdoor range and comes in a choice of wall, post and bollard and is available in standard or LED versions. Constructed from 316L stainless steel and polycarbonate, this range is suitable for both domestic and light commercial applications in and around coastal locations.



- Constructed from marine grade stainless steel (316L) & polycarbonate

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|-------------------------------|----------------------|------|-----|------|-------------------------------|
| 72915 | Equinox LED 1lt wall IP44 | 10W LED module (SMD) | 4000 | 141 | 14 | Proj: 180mm H: 295mm W: 115mm |
| 72916 | Equinox LED PIR 1lt wall IP44 | 10W LED module (SMD) | 4000 | 141 | 14 | Proj: 185mm H: 295mm W: 115mm |
| 72914 | Equinox LED post IP44 | 10W LED module (SMD) | 4000 | 141 | 14 | H: 500mm Dia: 150mm |
| 72913 | Equinox LED bollard IP44 | 10W LED module (SMD) | 4000 | 141 | 14 | H: 800mm Dia: 150mm |

EQUINOX

The Equinox is a stylish addition to our outdoor range and comes in a choice of wall, post and bollard and is available in standard or LED versions. Constructed from 316L stainless steel and polycarbonate, this range is suitable for both domestic and light commercial applications in and around coastal locations.



- Constructed from marine grade stainless steel (316L) & polycarbonate

| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|--------------|-----------------------|-------------------|-------------------------------|
| 49909 | Equinox 1lt wall IP44 | E27 PL (required) | Proj: 180mm H: 295mm W: 115mm |
| 49910 | Equinox post IP44 | E27 PL (required) | H: 500mm Dia: 150mm |
| 49911 | Equinox bollard IP44 | E27 PL (required) | H: 800mm Dia: 150mm |

TANGO

The Tango range has an interesting contemporary design finished in brushed stainless steel and will provide the perfect complement to any outdoor space. Choice of wall, post and bollard fittings.



- Constructed stainless steel (304) & polycarbonate

| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|-------|---------------------|----------------|-------------------------------|
| 13921 | Tango 1lt wall IP44 | E27 (required) | Proj: 160mm H: 260mm W: 100mm |
| 13922 | Tango post IP44 | E27 (required) | H: 450mm Dia: 140mm |
| 13923 | Tango bollard IP44 | E27 (required) | H: 800mm Dia: 140mm |

BLISS

The Bliss range is a collection of attractive, modern fittings with a brushed stainless steel finish. Constructed from metal and polycarbonate and IP44 rated, this sturdy fitting is protected against the intrusion of water and is the ideal outdoor light. Available as a wall or bollard fitting.



- Constructed stainless steel (304) & polycarbonate

| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|-------|---------------------|----------------|-------------------------------|
| 13798 | Bliss 1lt wall IP44 | E27 (required) | Proj: 170mm H: 220mm W: 100mm |
| 13799 | Bliss bollard IP44 | E27 (required) | H: 800mm Dia: 140mm |

CARRAWAY

The Carraway range are a collection of stylish outdoor fittings with an unique and luxurious design. Constructed from stainless steel (304) and polycarbonate this IP44 rated product offers protection against water intrusion. Ideal for adding a touch of elegance for entry and pathways outside your home. Matching range items available.



- Constructed from stainless steel (304) & polycarbonate

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | | |
|-------|------------------------|------------------------|------|-----|------|-------------|------------|----------|
| 79197 | Carraway IP44 | 10.8W LED module (SMD) | 4000 | 700 | 65 | Proj: 125mm | H: 230mm | W: 120mm |
| 79198 | Carraway wall PIR IP44 | 10.8W LED module (SMD) | 4000 | 700 | 65 | Proj: 125mm | H: 260mm | W: 120mm |
| 79199 | Carraway post IP44 | 10.8W LED module (SMD) | 4000 | 700 | 65 | H: 500mm | Dia: 120mm | |

PYRAMID

The Pyramid is a LED, high quality exterior lighting range which uses a stepped reflector to provide a distinctive light pattern. Available in a choice of wall and post options and finished in brushed stainless steel.



- Constructed from stainless steel (304) & polycarbonate

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | | |
|-------|-----------------------|----------------|------|-----|------|-------------|------------|---------|
| 13928 | Pyramid 1lt wall IP44 | 3.3W LED (SMD) | 6500 | 300 | 91 | Proj: 130mm | H: 145mm | W: 85mm |
| 13929 | Pyramid post IP44 | 3.3W LED (SMD) | 6500 | 300 | 91 | H: 500mm | Dia: 120mm | |

The Roko range of exterior LED lights come complete with a 3.5W LED GU10 that produces a high light output of 345 lumens of cool white light. These IP44 rated fittings are manufactured from marine grade stainless steel, making them suitable for coastal applications. Available as a post, bollard or wall light plus a PIR wall option.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|-------|------------------------|---------------|------|-----|------|-------------|-------------------|
| 67701 | Roko 1lt wall IP44 | 3.5W LED GU10 | 5000 | 345 | 99 | Proj: 195mm | H: 230mm W: 160mm |
| 67702 | Roko PIR 1lt wall IP44 | 3.5W LED GU10 | 5000 | 345 | 99 | Proj: 195mm | H: 230mm W: 160mm |
| 67703 | Roko post IP44 | 3.5W LED GU10 | 5000 | 345 | 99 | H: 500mm | Dia: 160mm |
| 67704 | Roko bollard IP44 | 3.5W LED GU10 | 5000 | 345 | 99 | H: 1000mm | Dia: 160mm |

The modern design of the Olympia exterior light range is an attractive choice for any outside area. Constructed from stainless steel (304) & polycarbonate and IP44 rated, this fitting is protected against the invasion of water. Matching range items available.



The Canillo range is supplied with a 3.5W LED GU10 which offers a high light output of cool white light. Modern in design and finish, this fitting has a IP44 rating for placement outdoors. Available as a post and bollard, plus a PIR wall option.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|---------------------------|---------------|------|-----|------|-------------------------------|
| 67697 | Canillo 1lt wall IP44 | 3.5W LED GU10 | 5000 | 345 | 99 | Proj: 135mm H: 160mm W: 110mm |
| 67698 | Canillo PIR 1lt wall IP44 | 3.5W LED GU10 | 5000 | 345 | 99 | Proj: 135mm H: 160mm W: 110mm |
| 67699 | Canillo post IP44 | 3.5W LED GU10 | 5000 | 345 | 99 | H: 500mm Dia: 110mm |
| 67700 | Canillo bollard IP44 | 3.5W LED GU10 | 5000 | 345 | 99 | H: 1000mm Dia: 110mm |

This robust, cool white light lantern style wall light has been designed for outdoor use and boasts an IP44 rating. The perfect choice for lighting up the entrance to your home or to illuminate the garden. Matching range items also available.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|----------------------|------------------------|------|-----|------|-------------------------------|
| 79203 | Larkin IP44 (down) | 10.8W LED module (SMD) | 4000 | 640 | 59 | Proj: 172mm H: 240mm W: 160mm |
| 79204 | Larkin IP44 (up) | 10.8W LED module (SMD) | 4000 | 640 | 59 | Proj: 172mm H: 240mm W: 160mm |
| 79205 | Larkin wall PIR IP44 | 10.8W LED module (SMD) | 4000 | 640 | 59 | Proj: 172mm H: 240mm W: 160mm |
| 79206 | Larkin post IP44 | 10.8W LED module (SMD) | 4000 | 640 | 59 | H: 500mm Dia: 160mm |

The Tribeca is a range of bollard, post and wall lights. Constructed from die cast aluminium giving a premium finish. The triangular shape of these fittings give a light wash effect.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|-----------------|-----------------------|---------------------|------|-----|------|-------------|-------------------|
| EL-40074 | Tribeca 1lt wall IP54 | 9W LED module (SMD) | 6000 | 297 | 33 | Proj: 170mm | H: 200mm W: 130mm |
| EL-40075 | Tribeca post IP54 | 9W LED module (SMD) | 6000 | 297 | 33 | H: 500mm | W: 130mm D: 125mm |
| EL-40076 | Tribeca bollard IP54 | 9W LED module (SMD) | 6000 | 297 | 33 | H: 800mm | W: 130mm D: 125mm |

The Arlow range all boast a contemporary design. Made from durable die cast aluminium and IP44 rated, these fittings are ideal for an array of modern outdoor decors.



SOLARIS ECO & WEDGE

The Solaris range is a collection of solar powered products. The Solaris is a compact, solar fitting that is simple to install and has a modern black finish. Ideal for use on sheds, garages and other areas where there is no electricity supply. The fitting has integrated 1.8W LED or 5W LED & boasts a built in Photocell & PIR sensor that ensures you have light when you need it without draining the battery. Other items in this range are available.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|-------|--------------------|----------------------------|------|-----|------|------------|-------------------|
| 76925 | Solaris Eco IP44 | 1.8W & 2W LED module (SMD) | 6500 | 200 | 111 | Proj: 56mm | H: 125mm W: 97mm |
| 76926 | Solaris Wedge IP44 | 5W LED module (SMD) | 6500 | 500 | 100 | Proj: 85mm | H: 115mm W: 210mm |

SOLARIS MICROWAVE

The Solaris 8W is a high output 1000 lumens microwave sensor solar powered luminaire with a colour temperature of 6500K. It boasts a keyhole slotted bracket to ensure easy installation. The fitting has integrated 8W LED & boasts an IP44 rating so it can withstand the elements. It comes complete with remote control and is finished in textured silver paint.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|-------|------------------------|---------------------|------|------|------|-------------|-------------------|
| 76927 | Solaris Microwave IP44 | 8W LED module (SMD) | 6500 | 1000 | 125 | Proj: 105mm | H: 125mm W: 205mm |

SENTINEL

The Sentinel range consist of robust IP44 rated, plastic security lights with adjustable twin LED heads. Their built in PIR sensor makes it the ideal fitting for outdoor areas as it only illuminates when movement is detected. These come in a variety of power options: mains; solar and battery operated to suit your lighting requirements.



- Constructed from black ABS plastic & frosted polycarbonate
- 180° detection angle, 10m maximum range with a 10±5 sec - 60±
- 10 secs timer function plus daylight function
- Proj: 150mm H: 160mm W: 200mm

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | |
|-------|-----------------------|------|---|------|------|----|
| 75270 | Sentinel battery IP44 | A | 2 x 2W LED module (SMD) daylight white | 6000 | 320 | 80 |
| 75271 | Sentinel solar IP44 | A | 2 x 10W LED module (SMD) daylight white | 6000 | 1400 | 70 |
| 75272 | Sentinel IP44 | A | 2 x 10W LED module (SMD) daylight white | 6000 | 1480 | 74 |

BIANCO

Brushed stainless steel exterior wall bracket with an opal diffuser made from polycarbonate. The Bianco is IP44 rated and available in a choice of standard and PIR options.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-----------|------------------------------|-----------------------|------|-----|------|-------------------------------|
| 75930 | Bianco LED 1lt wall IP44 | 5 7W LED module (SMD) | 3000 | 350 | 50 | Proj: 93mm H: 260mm W: 230mm |
| 75931 | Bianco LED PIR 1lt wall IP44 | 5 7W LED module (SMD) | 3000 | 350 | 50 | Proj: 104mm H: 260mm W: 230mm |
| ST031F | Bianco 1lt wall IP44 | 2 E27 GLS (required) | | | | Proj: 100mm H: 290mm W: 230mm |
| ST031FPIR | Bianco PIR 1lt wall IP44 | 2 E27 GLS (required) | | | | Proj: 100mm H: 300mm W: 235mm |

DORON

Doron is a high quality outdoor wall light with a simplistic design. Available in a choice of single or twin options, both of which are suitable for use with LED lamps and dimmable with the correct lamps.



- Constructed from die cast aluminium alloy & glass

| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|-------|---------------------|---------------------|------------------------------|
| 43655 | Doron 1lt wall IP44 | GU10 (required) | Proj: 100mm H: 80mm W: 65mm |
| 13915 | Doron 2lt wall IP44 | 2 x GU10 (required) | Proj: 100mm H: 145mm W: 65mm |

MORTI

The Morti is a premium range of die cast aluminium LED wall lights which provide a high light output and are available in a choice of single, twin and PIR options. Both the single and PIR fitting have adjustable heads and all fittings are finished in textured anthracite grey.



- Constructed from die cast aluminium alloy & clear glass
- Textured dark matt anthracite finish
- Angle of tilt: 90°

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|-------------------|---------------------------|------|-----|------|-----------------------------|
| 67685 | Morti single IP44 | 10W LED module (COB) | 4000 | 620 | 62 | Proj: 67mm H: 102mm W: 85mm |
| 67686 | Morti PIR IP44 | 10W LED module (COB) | 4000 | 620 | 62 | Proj: 67mm H: 151mm W: 85mm |
| 67687 | Morti twin IP44 | 2 x 5.5W LED module (COB) | 4000 | 720 | 65 | Proj: 57mm H: 170mm W: 84mm |


The Oreti LED wall lights feature an adjustable head which allows you to completely rotate the head so the light washes upwards, downwards or to either side. These fittings are available in either standard or PIR options both of which produce high light output, complete with LED driver and are finished in textured anthracite grey.



- Constructed from die cast aluminium alloy & clear glass
- Textured dark matt anthracite finish
- Rotation: 350°

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | | |
|-------|----------------|----------------------|------|-----|------|-------------|----------|----------|
| 67695 | Oreti IP44 | 10W LED module (COB) | 4000 | 700 | 70 | Proj: 140mm | H: 100mm | W: 110mm |
| 67696 | Oreti PIR IP44 | 10W LED module (COB) | 4000 | 700 | 70 | Proj: 140mm | H: 150mm | W: 110mm |

The Vulcan is a curved LED die cast aluminium wall fitting, with a 6W or 12W COB LED directing a warm white wash of light up and down. IP65, the fitting can also be placed vertical. Available in matt black and matt white.



- Constructed from die cast aluminium alloy & opal polycarbonate
- Textured matt white/black finish

Proj: 80mm H: 90mm W: 220mm



| CODE | DESCRIPTION | FINISH | LAMP | K | LM | LM/W | DIMENSIONS | |
|-------|-----------------------|------------|----------------------|------|-----|------|-------------|-------------------|
| 64745 | Vulcan 220mm 1lt wall | Matt white | 6W LED module (COB) | 3000 | 250 | 42 | Proj: 80mm | H: 90mm W: 220mm |
| 61866 | Vulcan 300mm 1lt wall | Matt white | 12W LED module (COB) | 3000 | 640 | 53 | Proj: 100mm | H: 120mm W: 300mm |
| 64744 | Vulcan 220mm 1lt wall | Matt black | 6W LED module (COB) | 3000 | 250 | 42 | Proj: 80mm | H: 90mm W: 220mm |
| 61865 | Vulcan 300mm 1lt wall | Matt black | 12W LED module (COB) | 3000 | 640 | 53 | Proj: 100mm | H: 120mm W: 300mm |

The Glover is a wall light which benefits from having integrated LED and the light can be adjusted to ensure precise light projection. Its stylish, matt black finish means it suits an array of home decors and is IP44 rated ensuring protection against water intrusion.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|-------------|-------------------------|------|-----|------|--------------------------|
| 79196 | Glover IP44 | 2 x 5W LED module (SMD) | 4000 | 610 | 61 | H: 150mm W: 68mm D: 70mm |



The Zyra is a fully adjustable, contemporary LED flood light that you can position to concentrate the light where you need it most. This exterior wall light is constructed from die-cast aluminium for better heat dissipation. Available with an extension arm for lighting boardings and signs. Can be used to point light up or down.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|--------------------|----------------------|------|------|------|------------------------------|
| 55718 | Zyra IP65 | 17W LED module (SMD) | 5000 | 1460 | 86 | Proj: 200mm H: 75mm W: 140mm |
| 55720 | Zyra extension arm | | | | | H: 110mm W: 110mm L: 670mm |

A range of exterior corner wall lights finished with white glass or clear ribbed shades. These lights are guaranteed to transform any wall or entrance to any property with their modern design.



The Breton is a contemporary box style wall light and is perfect for adding a modern flair to any outdoor space. IP44 rated, ensuring it's protected against water ingress. Stainless steel or matt black colour options are available.



- Constructed from stainless steel (304) & glass

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS |
|-------|----------------------|-------------------------|--------------------|-------------------------------|
| 53803 | Breton 1lt wall IP44 | Brushed stainless steel | E27 GLS (required) | Proj: 110mm H: 235mm W: 115mm |
| 78757 | Breton 1lt wall IP44 | Matt black | E27 GLS (required) | Proj: 110mm H: 235mm W: 115mm |

The popular York outdoor range is available in a choice of standard & PIR wall lights and finished in polished stainless steel.



- Constructed from stainless steel (304) & polycarbonate

| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|---------|------------------------|--------------------|-------------------------------|
| 4478182 | York 1lt wall IP44 | E27 GLS (required) | Proj: 240mm H: 338mm W: 200mm |
| 4479782 | York PIR 1lt wall IP44 | E27 GLS (required) | Proj: 240mm H: 370mm W: 200mm |

INOVA PIR

The Inova PIR is a modern exterior wall light in a choice of finishes. Activated on movement, making it suitable for lighting paths and doorways and for use as a security light.



- Constructed from stainless steel (304) & polycarbonate
- 110° detection angle, 8m maximum range with a 5 sec - 5 min timer function

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS |
|-------|-------------------------|-------------------------|--------------------|-------------------------------|
| 49945 | Inova PIR 1lt wall IP44 | Brushed stainless steel | E27 GLS (required) | Proj: 250mm H: 380mm W: 240mm |
| 49946 | Inova PIR 1lt wall IP44 | Matt black | E27 GLS (required) | Proj: 250mm H: 380mm W: 240mm |

PAGODA PIR

The Pagoda is an exterior wall light fitted with a PIR that lights the LEDs for added security. Stylishly designed to look great in any modern environment and suitable for use in both domestic and commercial environments.



- Constructed from stainless steel (304) & polycarbonate
- 10 lux on, 10 lux off. 110° detection angle, 8m maximum range with a 5 sec - 5 min timer function

| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|-------|--------------------------|--|-------------------------------|
| 13924 | Pagoda PIR 1lt wall IP44 | E27 (required) & 12 x 0.05W LED (Included) | Proj: 215mm H: 335mm W: 170mm |

TRADITIONAL

The Traditional range of exterior flush wall lights are available in a choice of standard and PIR options with a satin black finish.



HALBURY

The Halbury is a traditional outdoor wall light range available in a matt black or white finish. Standard, PIR and LED options available.



| CODE | DESCRIPTION | FINISH | LAMP | K | LM | LM/W |
|----------|---------------------------|--------|------------|--------------------|-----|------|
| 78616 | Halbury IP44 | 3 A | Matt white | 4200 | 500 | 71 |
| 54554 | Halbury PIR 1lt wall IP44 | 3 A | Matt white | 4200 | 500 | 71 |
| EL-40116 | Halbury 1lt wall IP44 | 3 A | Matt black | 4200 | 500 | 71 |
| 54553 | Halbury PIR 1lt wall IP44 | 3 A | Matt black | 4200 | 500 | 71 |
| EL-40114 | Halbury 1lt wall IP44 | 2 | Matt black | n/a | n/a | n/a |
| EL-40115 | Halbury PIR 1lt wall IP44 | 2 | Matt black | E27 GLS (required) | n/a | n/a |

Bayswater range are IP44 rated, rust proof, polypropylene wall lights. Suitable for use with LED lamps and are dimmable. Fittings can be converted to either up or down light fixing. Available in black or white finishes.



| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS |
|-----------------|-------------------------|--------|--------------------|-------------------------------|
| 60965 | Bayswater 1lt wall IP44 | White | E27 GLS (required) | Proj: 220mm H: 355mm W: 170mm |
| EL-40045 | Bayswater 1lt wall IP44 | Black | E27 GLS (required) | Proj: 220mm H: 355mm W: 170mm |

A traditional lantern style exterior wall light, available in a matt black or white finish. Incorporates PIR and LED technology making it practical, energy efficient and stylish. Standard versions also available.



ZONE

The Zone is a high quality professional bollard suitable for commercial use for lighting pathways and driveways.



- Constructed from die cast aluminium alloy & polycarbonate

| CODE | DESCRIPTION | FINISH | LAMP | DIMENSIONS |
|-------|-------------------|----------------|----------------|---------------------|
| 13822 | Zone bollard IP65 | Textured black | E27 (required) | H: 980mm Dia: 170mm |

ZONE LED & DOME LED

The Zone LED & Dome LED are robust bollards, ideal to be used in commercial spaces by illuminating pathways and driveways. This robust fitting boasts a high lumen output of 1300 lumens, and its IP65 rating means it offers resistance against dust and water. Root kit accessory available.



- Constructed from die cast aluminium alloy & polycarbonate
- Textured black finish

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|---------------|----------------------|------|------|------|----------------------|
| 73436 | Dome LED IP65 | 25W LED module (SMD) | 4000 | 1300 | 52 | H: 1000mm Dia: 168mm |
| 73435 | Zone LED IP65 | 25W LED module (SMD) | 4000 | 1300 | 52 | H: 980mm Dia: 168mm |
| 73437 | Root kit | | | | | H: 400mm Dia: 170mm |

SCIMITAR

The Scimitar range consists of compact and energy efficient floodlights. The Scimitar has a unique prismatic shade to reduce glare & an angled bracket to ensure easy installation. A variety of finishes and PIR versions are available. SMD also provides less heat which is one of the main advantages of LED. IP65 rated protection and a 5 year warranty as standard. Comes pre-wired with a 1.5m flex cable.



| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS | | | |
|-------|-------------------|--------|------------|------|------|------------|-------------|----------|----------|
| 73453 | Scimitar IP65 10W | A | Matt white | 4000 | 800 | 80 | Proj: 110mm | H: 110mm | W: 117mm |
| 73457 | Scimitar IP65 30W | A | Matt white | 4000 | 2400 | 80 | Proj: 170mm | H: 170mm | W: 167mm |
| 73461 | Scimitar IP65 50W | A | Matt white | 4000 | 4000 | 80 | Proj: 230mm | H: 220mm | W: 222mm |
| 73451 | Scimitar IP65 10W | A | Matt black | 4000 | 800 | 80 | Proj: 110mm | H: 110mm | W: 117mm |
| 73455 | Scimitar IP65 30W | A | Matt black | 4000 | 2400 | 80 | Proj: 170mm | H: 170mm | W: 167mm |
| 73459 | Scimitar IP65 50W | A | Matt black | 4000 | 4000 | 80 | Proj: 230mm | H: 220mm | W: 222mm |

SCIMITAR PIR

The Scimitar range consists of compact and energy efficient floodlights. The Scimitar has a unique prismatic shade to reduce glare & an angled bracket to ensure easy installation. A variety of finishes and PIR versions are available. SMD also provides less heat which is one of the main advantages of LED. IP65 rated protection and a 5 year warranty as standard. Comes pre-wired with a 1.5m flex cable.



| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS | | | |
|-------|-----------------------|--------|------------|------|------|------------|-------------|----------|----------|
| 73454 | Scimitar PIR IP44 10W | A | Matt white | 4000 | 800 | 80 | Proj: 170mm | H: 170mm | W: 117mm |
| 73458 | Scimitar PIR IP44 30W | A | Matt white | 4000 | 2400 | 80 | Proj: 230mm | H: 210mm | W: 167mm |
| 73462 | Scimitar PIR IP44 50W | A | Matt white | 4000 | 4000 | 80 | Proj: 280mm | H: 270mm | W: 222mm |
| 73452 | Scimitar PIR IP44 10W | A | Matt black | 4000 | 800 | 80 | Proj: 170mm | H: 170mm | W: 117mm |
| 73456 | Scimitar PIR IP44 30W | A | Matt black | 4000 | 2400 | 80 | Proj: 230mm | H: 210mm | W: 167mm |
| 73460 | Scimitar PIR IP44 50W | A | Matt black | 4000 | 4000 | 80 | Proj: 280mm | H: 270mm | W: 222mm |

SURGE

The Surge range consists of compact and budget friendly floodlights. They provide a high light output and a colour temperature of 4000K. Boasting an angled bracket to ensure easy installation and flexibility to suit your lighting needs. IP65 rated to ensure protection against water. 3 year warranty as standard and comes pre wired with a 1.5m flex cable. Various sizes & PIR versions are available.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|--------------------|---|------|------|--------------------|
| 78962 | Surge 10W IP65 10W | A | 4000 | 800 | 80 |
| 78964 | Surge 20W IP65 20W | A | 4000 | 1600 | 80 |
| 78966 | Surge 30W IP65 30W | A | 4000 | 2400 | 80 |
| 78968 | Surge 50W IP65 50W | A | 4000 | 4000 | 80 |
| 78970 | Earth spike | | | | H: 170mm Dia: 45mm |

SURGE PIR

The Surge range consists of compact and budget friendly floodlights. They provide a high light output and a colour temperature of 4000K. Boasting an angled bracket to ensure easy installation and flexibility to suit your lighting needs. IP65 rated to ensure protection against water. 3 year warranty as standard and comes pre wired with a 1.5m flex cable. Various sizes & PIR versions are available.





Slim and small in size, the Mantra provides a high lumen output and is integrated with a LED module. Its modern matt black finish allows it to fit in with any environment and its IP65 rating offers protection against water. Comes complete with bracket to offer flexibility of where the light can be projected. 2 year warranty as standard and comes pre wired with a 1.5m flex cable. Various sizes & PIR versions are available.



NEW PRODUCT

IP65 RATED

UP TO 16,000 LM/W

PRE-CABLE 1M

2
1
SMD
IP65
10
80
CRI
6
A

- Constructed from die cast aluminium alloy & clear glass
- Matt black finish

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|-------|------------------|-----------------------|------|-------|------|------------|-------------------|
| 78971 | Mantra 100W IP65 | 100W LED module (SMD) | 6500 | 8000 | 80 | Proj: 38mm | H: 321mm W: 282mm |
| 78972 | Mantra 150W IP65 | 150WLED module (SMD) | 6500 | 12000 | 80 | Proj: 51mm | H: 420mm W: 333mm |
| 78973 | Mantra 200W IP65 | 200WLED module (SMD) | 6500 | 16000 | 80 | Proj: 51mm | H: 470mm W: 385mm |

LUIK CASING

The Luik range is a tough and robust bulkhead luminaire, constructed from die-cast aluminium with a durable powder coating finish and a polycarbonate diffuser. The light fitting also benefits from an IP65 rating and an IK10 impact rating. Easy to install, available in plain, eyelid and grill bezel, with options of emergency, microwave sensor. The Luik is ideally suited for public buildings, car parks to industrial facilities, in both exterior and interior applications. Available in a choice of finishes.

CREATE YOUR PERFECT LUIK BULKHEAD

1. Firstly choose your style and colour from our plain, eyelid and grill options, which are all available in black, white or grey.
2. Then pick your gear tray, the options are standard, microwave, emergency or microwave emergency.

ROBUST
IK10
RATED

IP65
RATED



1: SELECT YOUR CASING STYLE & COLOUR...

| CODE | DESCRIPTION | FINISH | COMPLETE PRODUCT LUMEN | DIMENSIONS |
|--------------|-------------------------|----------------|------------------------|-----------------------|
| 61646 | Luik plain casing IP65 | Textured black | 1210 | Proj: 64mm Dia: 359mm |
| 61648 | Luik eyelid casing IP65 | Textured black | 770 | Proj: 68mm Dia: 359mm |
| 61650 | Luik grill casing IP65 | Textured black | 1010 | Proj: 74mm Dia: 359mm |
| 61647 | Luik plain casing IP65 | Textured grey | 1210 | Proj: 64mm Dia: 359mm |
| 61649 | Luik eyelid casing IP65 | Textured grey | 770 | Proj: 68mm Dia: 359mm |
| 61651 | Luik grill casing IP65 | Textured grey | 1010 | Proj: 74mm Dia: 359mm |
| 69231 | Luik plain casing IP65 | Textured white | 1210 | Proj: 64mm Dia: 359mm |
| 69232 | Luik eyelid casing IP65 | Textured white | 770 | Proj: 68mm Dia: 359mm |
| 69233 | Luik grill casing IP65 | Textured white | 1010 | Proj: 74mm Dia: 359mm |

LUIK GEAR TRAY

Standard, emergency, microwave and microwave emergency gear trays designed to be used with the Luik bulkheads. Create your ideal bulkhead below.



2. NOW SELECT YOUR TRAY...

| CODE | DESCRIPTION | LAMP | K | DIMENSIONS |
|--------------|-----------------------------|----------------------|------|--------------------|
| 61652 | Luik gear tray | 18W LED module (SMD) | 4200 | H: 23mm Dia: 282mm |
| 61653 | Luik EM gear tray | 18W LED module (SMD) | 4200 | H: 40mm Dia: 283mm |
| 72180 | Luik Microwave gear tray | 18W LED module (SMD) | 4200 | H: 32mm Dia: 283mm |
| 72181 | Luik Microwave EM gear tray | 18W LED module (SMD) | 4200 | H: 40mm Dia: 283mm |

LUCCA

The Lucca range are a collection of functional exterior wall packs for commercial applications. These energy efficient luminaires provide a high 2200 lumens output. This range has two conduit entries, one on either side, plus an entry in the base of the fitting. Constructed from polycarbonate, each fitting is tough and hard wearing. Standard or sensor options available.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|-------|----------------------|----------------------|------|------|------|-------------|-------------------|
| 67176 | Lucca IP44 | 30W LED module (SMD) | 4200 | 2200 | 73 | Proj: 125mm | H: 310mm W: 265mm |
| 67177 | Lucca photocell IP44 | 30W LED module (SMD) | 4200 | 2200 | 73 | Proj: 125mm | H: 310mm W: 265mm |

LUCCA MINI

The Lucca Mini is a functional & compact exterior wall light. This energy efficient luminaire provides a light output of 1500 lumens, making it ideal for security and safety. Constructed from polycarbonate, IP65 rated, and IK08 rated each fitting is robust and durable. Standard & sensor options are available.

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|-------|---------------------------|----------------------|------|------|------|------------|-------------------|
| 77914 | Lucca Mini IP65 | 17W LED module (SMD) | 4200 | 1500 | 88 | Proj: 73mm | H: 275mm W: 185mm |
| 77915 | Lucca Mini MW IP65 | 17W LED module (SMD) | 4200 | 1500 | 88 | Proj: 73mm | H: 275mm W: 185mm |
| 77916 | Lucca Mini photocell IP65 | 17W LED module (SMD) | 4200 | 1500 | 88 | Proj: 73mm | H: 275mm W: 185mm |

SERAN

The Seran is a range of polycarbonate LED bulkheads available in a choice of plain and eyelid designs. These offers a tough and durable body and diffuser in a slimline fitting, they are low energy and highly efficient fittings suitable for both commercial and domestic use, the 12W LEDs produce up to 1100 lumens. Available in standard and microwave versions.



| CODE | DESCRIPTION | LAMP | FINISH | K | LM | LM/W | DIMENSIONS |
|-------|-------------------|----------------------|------------|------|------|------|-----------------------|
| 55691 | Seran plain IP65 | 12W LED module (SMD) | Matt white | 6000 | 1000 | 83 | Proj: 90mm Dia: 300mm |
| 55692 | Seran eyelid IP65 | 12W LED module (SMD) | Matt white | 6000 | 790 | 66 | Proj: 93mm Dia: 300mm |
| 55689 | Seran plain IP65 | 12W LED module (SMD) | Matt black | 6000 | 1000 | 83 | Proj: 90mm Dia: 300mm |
| 55690 | Seran eyelid IP65 | 12W LED module (SMD) | Matt black | 6000 | 790 | 66 | Proj: 93mm Dia: 300mm |

SERAN MICROWAVE

The Seran is a range of polycarbonate LED bulkheads available in a choice of plain and eyelid designs. These offers a tough and durable body and diffuser in a slimline fitting, they are low energy and highly efficient fittings suitable for both commercial and domestic use, the 12W LEDs produce up to 1100 lumens. Available in standard and microwave versions.



| CODE | DESCRIPTION | LAMP | FINISH | K | LM | LM/W | DIMENSIONS |
|-------|-----------------------------|----------------------|------------|------|------|------|-----------------------|
| 78609 | Seran Microwave plain IP44 | 12W LED module (SMD) | Matt white | 6000 | 1100 | 92 | Proj: 90mm Dia: 300mm |
| 78610 | Seran Microwave eyelid IP44 | 12W LED module (SMD) | Matt white | 6000 | 800 | 67 | Proj: 93mm Dia: 300mm |
| 78607 | Seran Microwave plain IP44 | 12W LED module (SMD) | Matt black | 6000 | 1100 | 92 | Proj: 90mm Dia: 300mm |
| 78608 | Seran Microwave eyelid IP44 | 12W LED module (SMD) | Matt black | 6000 | 800 | 67 | Proj: 93mm Dia: 300mm |

MOTION LED PIR

The Motion LED security PIR bulkhead is made from tough vandal resistant polycarbonate and suitable for both commercial and domestic applications. White or black finish options.

AVIT

Budget LED bulkhead with weatherproof conduit entry at the top and bottom. Can be fitted portrait or landscape. With its polycarbonate casing, the Avit is hardwearing and suitable for coastal areas.



- Constructed from polycarbonate
- 110° detection angle, 10m maximum range with a 5 sec - 4 min timer function
- Proj: 114mm H: 280mm W: 114mm

| CODE | DESCRIPTION | FINISH | LAMP | K | LM | LM/W | |
|-------|---------------------------------|-------------|--------------------|---------------------|------|------|-----|
| 73717 | Motion LED PIR 1lt wall IP44 6W | A | Gloss white | 6W LED module (SMD) | 6000 | 600 | 100 |
| 73716 | Motion LED PIR 1lt wall IP44 6W | A | Black | 6W LED module (SMD) | 6000 | 600 | 100 |
| 48740 | Motion PIR 1lt wall IP44 | Gloss white | 60W E27 (required) | | | | |
| 48739 | Motion PIR 1lt wall IP44 | Black | 60W E27 (required) | | | | |



- Constructed from polycarbonate & ABS plastic
- Clear prismatic & black finish

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|-------------|---------------------|------|-----|------|-------------------------------|
| 61671 | Avit IP44 | 6W LED module (SMD) | 4200 | 520 | 87 | Proj: 116mm H: 240mm W: 115mm |

PILLO

The Pillo range is a collection of polycarbonate LED oval robust bulkheads. Its flush design makes it suitable for both walls and ceilings, indoors and outdoors due to its IP54 rating. The Pillos are low energy and high lumen output making it the ideal fitting for commercial or domestic use. Available in two different sizes, styles and colour finishes.



ROND

The Rond is a polycarbonate LED circular robust bulkhead. Its flush design makes it suitable for both walls and ceilings, indoors and outdoors due to its IP54 rating. The Rond is low energy and high lumen output making it the ideal fitting for commercial or domestic use. Also comes in a sensor version, different styles and colour finishes are available.

NEW
PRODUCT

IP54
RATED

IK10
RATED

**UP TO
1000
LUMEN**

78622
78851
78853

78851
78851

78853

5W
12W
SMD
IP54
IK10
A

- Constructed from polycarbonate

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|--------------------------|----------------------|------|------|------|-------------------------|
| 78622 | Rond white plain IP54 | 12W LED module (SMD) | 4000 | 1000 | 83 | Proj: 48mm Dia: 210mm |
| 78623 | Rond MW white plain IP54 | 12W LED module (SMD) | 4000 | 950 | 79 | Proj: 48mm Dia: 210mm |
| 78853 | Rond white eyelid bezel | | | | | Proj: 50mm Dia: 210mm |
| 78851 | Rond black plain bezel | | | | | Proj: 32.5mm Dia: 210mm |
| 78852 | Rond black eyelid bezel | | | | | Proj: 50mm Dia: 210mm |

224 EXTERIOR BULKHEAD

SEINA HALF BRICK

The Seina half brick is the ideal outdoor fitting for smaller properties where space is scarce. Available in a choice of finishes.

NEW
PRODUCT

**MARINE
GRADE
316**

IP44
RATED

5W
12W
SMD
IP44
IK10
A

- Constructed from marine grade stainless steel (316) & polycarbonate
- 2W LED module (SMD)
- Min void: 102.5mm
- Cut out: 103 x 65mm


| CODE | DESCRIPTION | FINISH | K | LM | LM/W | DIMENSIONS |
|-------|--------------------------|------------------------------|------|-----|------|----------------------------|
| 75528 | Seina Half Brick IP44 2W | Marine grade stainless steel | 4000 | 100 | 50 | Proj: 2mm H: 85mm W: 122mm |
| 78645 | Seina Half Brick IP44 2W | Textured black | 4000 | 100 | 50 | Proj: 2mm H: 85mm W: 122mm |

EXTERIOR GUIDE 225

SEINA STAINLESS STEEL

Specially designed LED brick lights. The rear housing is the size of a regular brick, meaning that no special cutting is required. It has a specially designed LED board and has a polycarbonate shade for improved light output. Straightforward installation with angled cable lands and fast fix terminal block. Designed to take armoured cable. Louvered, plain and guide available in three colours, including marine grade brushed stainless steel. RGB colour changing LED option also available.

75527

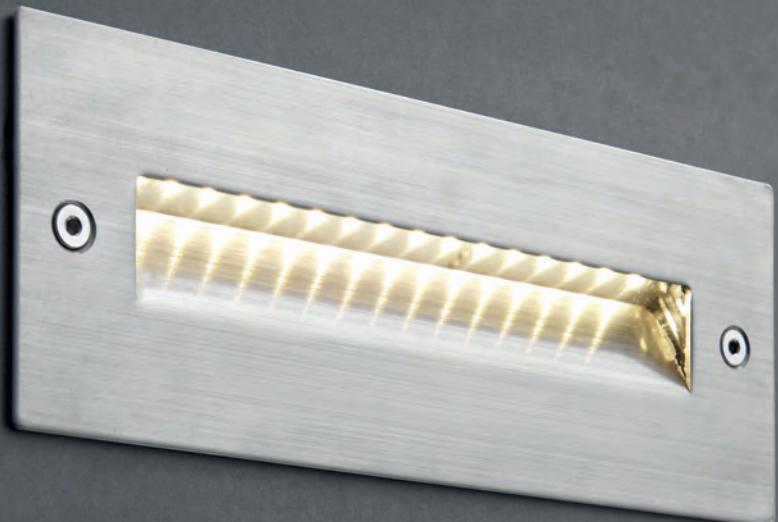

- Constructed from marine grade stainless steel (316) & polycarbonate
- LED module (SMD)
- Min void: 102.5mm
- Cut out: 215 x 65mm
- Warm white module (78641) only compatible with plain fittings



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|---|---|------|------|----------------------------|
| 78637 | Seina plain IP44 3.5W | A | 4000 | 200 | 57 |
| 67602 | Seina RGB IP44 4.2W | A | | | Proj: 2mm H: 85mm W: 225mm |
| 78639 | Seina louvre IP44 3.5W | A | 4000 | 50 | 14 |
| 75527 | Seina guide IP44 2W | A | 4000 | 100 | 50 |
| 78641 | Seina plain warm white module IP44 3.5W | A | 3000 | 200 | 57 |

NEW
PRODUCT


EXACT
BRICK
SIZE

IP44
RATED

SEINA BLACK

Specially designed LED brick lights. The rear housing is the size of a regular brick, meaning that no special cutting is required. It has a specially designed LED board and has a polycarbonate shade for improved light output. Straightforward installation with angled cable lands and fast fix terminal block. Designed to take armoured cable. Louvered, plain and guide available in three colours, including marine grade brushed stainless steel. RGB colour changing LED option also available.

78644

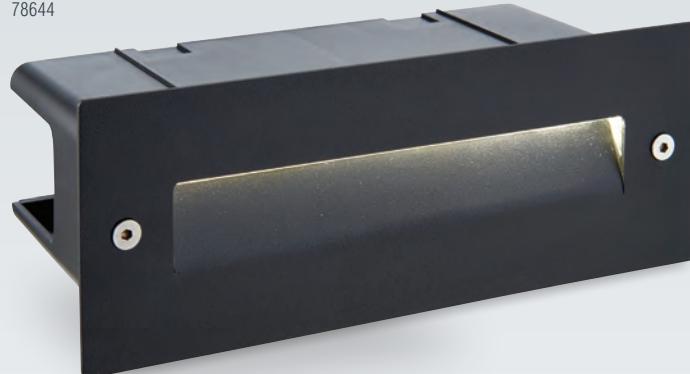

- Constructed from stainless steel (304) & polycarbonate
- Textured black finish
- LED module (SMD)
- Min void: 102.5mm
- Cut out: 215 x 65mm
- Warm white module (78641) only compatible with plain fittings



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|---|---|------|------|----------------------------|
| 78638 | Seina plain IP44 3.5W | A | 4000 | 200 | 57 |
| 67603 | Seina RGB IP44 4.2W | A | | | Proj: 2mm H: 85mm W: 225mm |
| 78640 | Seina louvre IP44 3.5W | A | 4000 | 50 | 14 |
| 78644 | Seina guide IP44 2W | A | 4000 | 100 | 50 |
| 78641 | Seina plain warm white module IP44 3.5W | A | 3000 | 200 | 57 |

The Eco light is an incredibly cost effective, discreet brick light, built from sturdy aluminium. Supplied with both plain and louvre front panels for choice.



| CODE | DESCRIPTION | LAMP | FINISH | DIMENSIONS | CUT OUT |
|--------|-------------------------|--------------------|----------------|-----------------------------|------------|
| 52213 | Eco plain & louvre IP44 | E27 GLS (required) | Textured grey | Proj: 6mm H: 100mm W: 235mm | 85 x 226mm |
| OL60AB | Eco plain & louvre IP44 | E27 GLS (required) | Textured black | Proj: 6mm H: 100mm W: 235mm | 85 x 226mm |



SEVERUS BLACK

The Severus is a range of surface mounted LED guide lights, which are quick and easy to fit. Manufactured from polycarbonate, they are the ideal choice for coastal locations. Available in a choice of direct and indirect light, design and finish. The clever design means that you can now fit guide lights when you are not able to cut holes in your wall. The slim profile and integrated driver allows us to keep the projection from the wall to a minimum and the IP rating is ensured by the gasket and the diffuser when it is fitted into place. The outer cover simply clips into place to complete the installation.



- Constructed from black ABS plastic & frosted polycarbonate
- LED module (SMD)

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|--------------|------------------------------------|----------|------|------|------------|
| 61211 | Severus landscape direct IP65 3W | A | 3000 | 180 | 60 |
| | Proj: 30mm H: 80mm W: 230mm | | | | |
| 61214 | Severus landscape indirect IP65 2W | A | 3000 | 65 | 33 |
| | Proj: 30mm H: 80mm W: 230mm | | | | |
| 61218 | Severus square direct IP65 3W | A | 3000 | 190 | 63 |
| | Proj: 30mm Sq: 125mm | | | | |
| 61219 | Severus square indirect IP65 1.1W | A | 3000 | 42 | 38 |
| | Proj: 30mm Sq: 125mm | | | | |
| 61220 | Severus round direct IP65 2W | A | 3000 | 180 | 90 |
| | Proj: 30mm Dia: 150mm | | | | |


SEVERUS GREY

The Severus is a range of surface mounted LED guide lights, which are quick and easy to fit. Manufactured from polycarbonate, they are the ideal choice for coastal locations. Available in a choice of direct and indirect light, design and finish. The clever design means that you can now fit guide lights when you are not able to cut holes in your wall. The slim profile and integrated driver allows us to keep the projection from the wall to a minimum and the IP rating is ensured by the gasket and the diffuser when it is fitted into place. The outer cover simply clips into place to complete the installation.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-----------------|------------------------------------|----------|------|------|------------|
| EL-40103 | Severus landscape direct IP65 3W | A | 3000 | 180 | 60 |
| | Proj: 30mm H: 80mm W: 230mm | | | | |
| EL-40104 | Severus landscape indirect IP65 2W | A | 3000 | 65 | 33 |
| | Proj: 30mm H: 80mm W: 230mm | | | | |
| EL-40106 | Severus square direct IP65 3W | A | 3000 | 190 | 63 |
| | Proj: 30mm Sq: 125mm | | | | |
| EL-40107 | Severus square indirect IP65 1.1W | A | 3000 | 42 | 38 |
| | Proj: 30mm Sq: 125mm | | | | |
| EL-40108 | Severus round direct IP65 2W | A | 3000 | 180 | 90 |
| | Proj: 30mm Dia: 150mm | | | | |

The Hester is a small and compact indirect guide light, the offers a soft lighting effect. Its sleek and modern design makes it the perfect addition to various homes and can be used indoors or outdoors due to its IP65 rating. Available in a round or square shape.

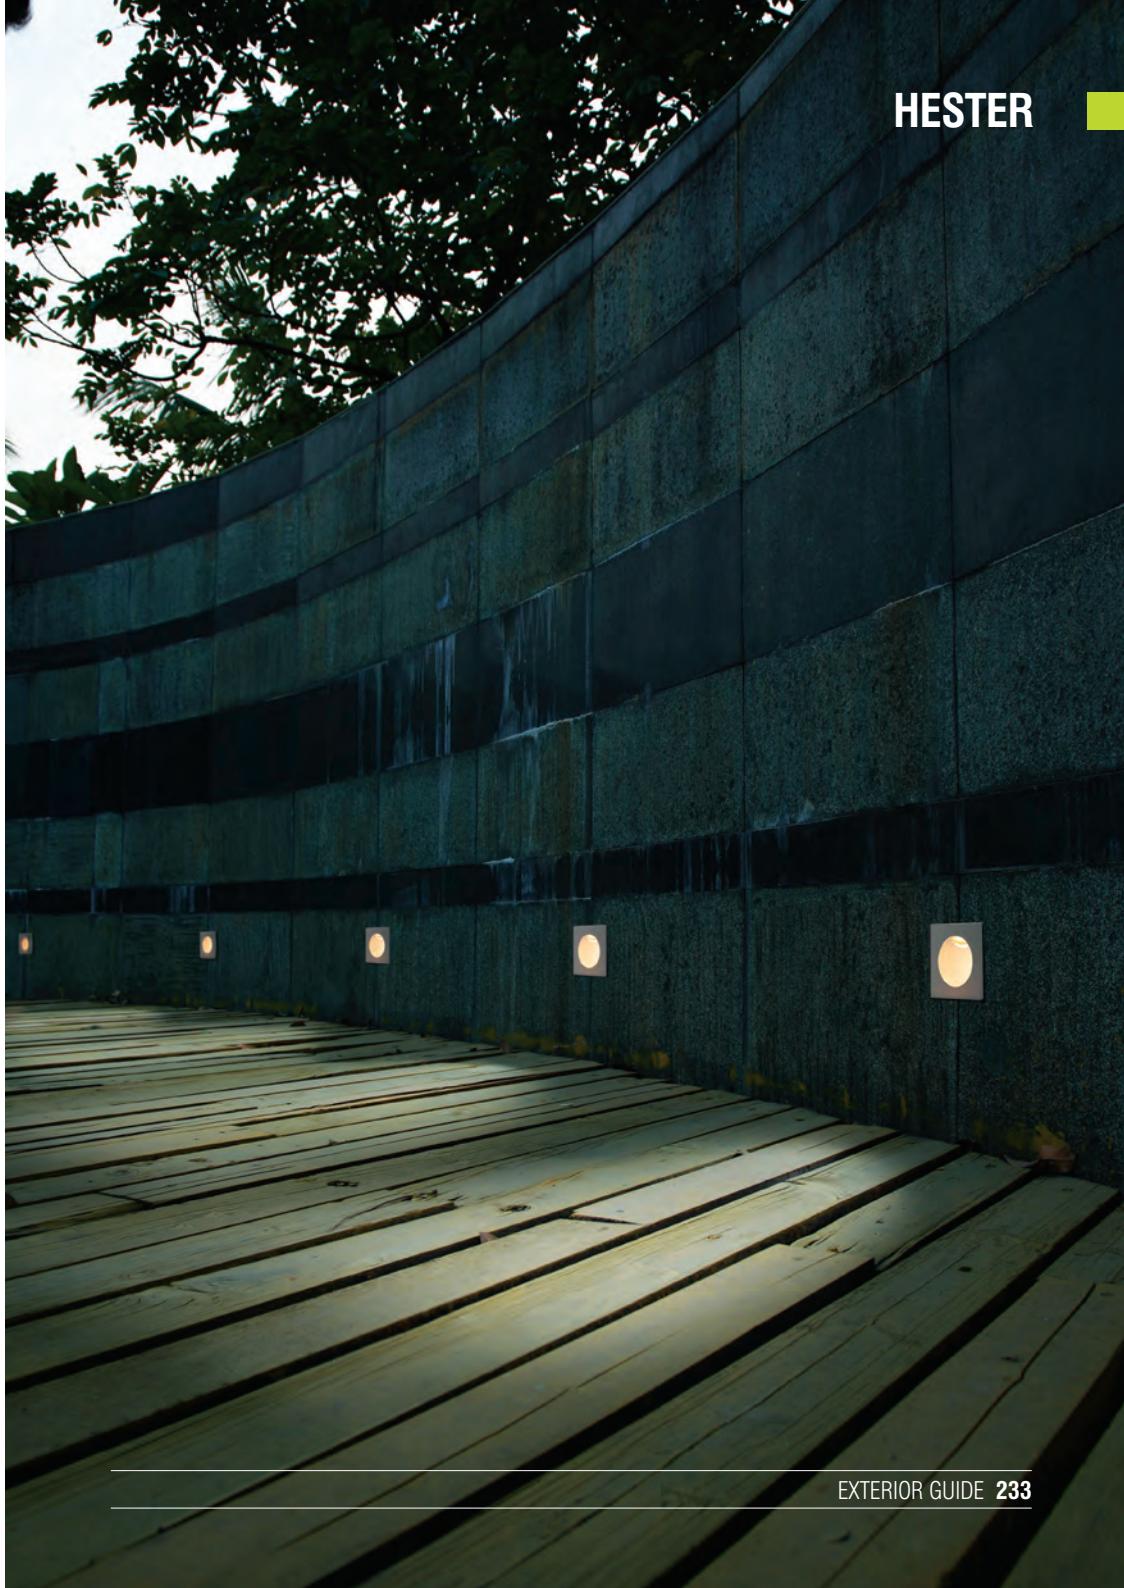

An addition to the popular IkonPRO recessed LED decking kit range, within each head there is a choice of colours. Featuring the unique design of removable and interchangeable heads, to change colour you simply turn the head 180° and reinsert into the loom. The Fresnel lenses improve lumen output, diffusing the spread of light evenly. Designed to be fitted and wired during the decking build stage without the heads, the supplied rubber caps protect the fitting from the elements until the decking is complete. Each individual IP67 head then simply plug in, adding the final touches to the decking design. Available in a variety of sizes and colours.

IKON
PRO



- Constructed from stainless steel (304) & polycarbonate
- 10 x 0.75W LED module (SMD) CCT
- Min void: 80mm

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS | CUT OUT |
|-------|---------------------------|---|-----------|------|------------|----------------------------------|
| 73347 | IkonPRO CCT 25mm kit IP67 | A | 3000/4000 | 120 | 16 | Proj: 1mm Dia: 25mm Dia: 20mm |
| 73348 | IkonPRO CCT 35mm kit IP67 | A | 3000/4000 | 280 | 37 | Proj: 1mm Dia: 35mm Dia: 25mm |
| 73349 | IkonPRO CCT 45mm kit IP67 | A | 3000/4000 | 410 | 55 | Proj: 1mm Dia: 45mm Dia: 32mm |
| 76615 | IkonPRO CCT 25mm kit IP67 | A | 6500/Blue | 120 | 16 | Proj: 1mm Dia: 25mm Dia: 20mm |
| 76616 | IkonPRO CCT 35mm kit IP67 | A | 6500/Blue | 280 | 37 | Proj: 1mm Dia: 35mm Dia: 25mm |
| 76617 | IkonPRO CCT 45mm kit IP67 | A | 6500/Blue | 410 | 55 | Proj: 1mm Dia: 45mm Dia: 32mm |

Fitting the IkonPRO couldn't be easier....

The clever design of the IP67 connector means that you can mix the different colours and sizes too. Use the Ikon Pro heads to indicate a change of level or zone. The extension cable can be fitted between the driver and the first loom or between the two looms enabling you to configure your product perfectly.



IkonPRO inline sensors have been added to the range, PIR presence detectors and photocell twilight detector.



- Constructed from stainless steel (304) & polycarbonate

PIR PRESENCE DETECTOR

- 30 lux on, 30 lux off. 115 degree 1.5m detection range, 5 minutes ±1min off after no movement

TWILIGHT DETECTOR

- 30 lux on, 30 lux off.

| CODE | DESCRIPTION | DIMENSIONS | CUT OUT |
|-------|------------------------------------|---------------------|-----------|
| 71553 | IkonPRO PIR presence detector IP67 | Proj: 4mm Dia: 45mm | Dia: 32mm |
| 71554 | IkonPRO twilight detector IP67 | Proj: 1mm Dia: 45mm | Dia: 32mm |

IKONPRO RGB

The IkonPRO extends the Ikon recessed decking kit range, with its unique design of removable and interchangeable heads. The new Fresnel lenses improve lumen output, diffusing the spread of light evenly. Designed to be fitted and wired during the decking build stage without the heads. The supplied rubber caps protect the fitting from the elements until the decking is complete. Each individual IP67 head easily connects and can be placed into position quickly, adding the final touches to the decking design. There are three head sizes to choose from for the RGB kit.



| CODE | DESCRIPTION | LAMP | DIAMETER | CUT OUT |
|-------|-----------------------|-----------------------------------|-----------|-----------|
| 59136 | IkonPRO 25mm kit IP67 | A 10 x 0.75W LED module (SMD) RGB | Dia: 25mm | Dia: 20mm |
| 59137 | IkonPRO 35mm kit IP67 | A 10 x 0.75W LED module (SMD) RGB | Dia: 35mm | Dia: 25mm |
| 59138 | IkonPRO 45mm kit IP67 | A 10 x 1.5W LED module (SMD) RGB | Dia: 45mm | Dia: 32mm |

IKON ROUND


The Ikon Round LED has a contemporary IP67 waterproof design making this unit a must for decking areas, walkways and other outdoor areas. Combined with exceptionally low power consumption, this product is cost effective and cheap to run. Available in white or blue.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS | CUT OUT |
|-------|--------------------------|---|------|------|------------|-------------------------------|
| 13889 | Ikon round 30mm kit IP67 | A | 7500 | 21 | 14 | Proj: 1mm Dia: 30mm Dia: 22mm |
| 13890 | Ikon round 30mm kit IP67 | A | Blue | | | Proj: 1mm Dia: 30mm Dia: 22mm |

COVE

The Cove is a SMD LED decking light. With the latest in LED technology, this 0.3W recessed fitting is ideal for coastal locations. This IP67 rated fitting is available in marine grade stainless steel finish. The range comes in two colour temperatures, 3000K or 6500K.

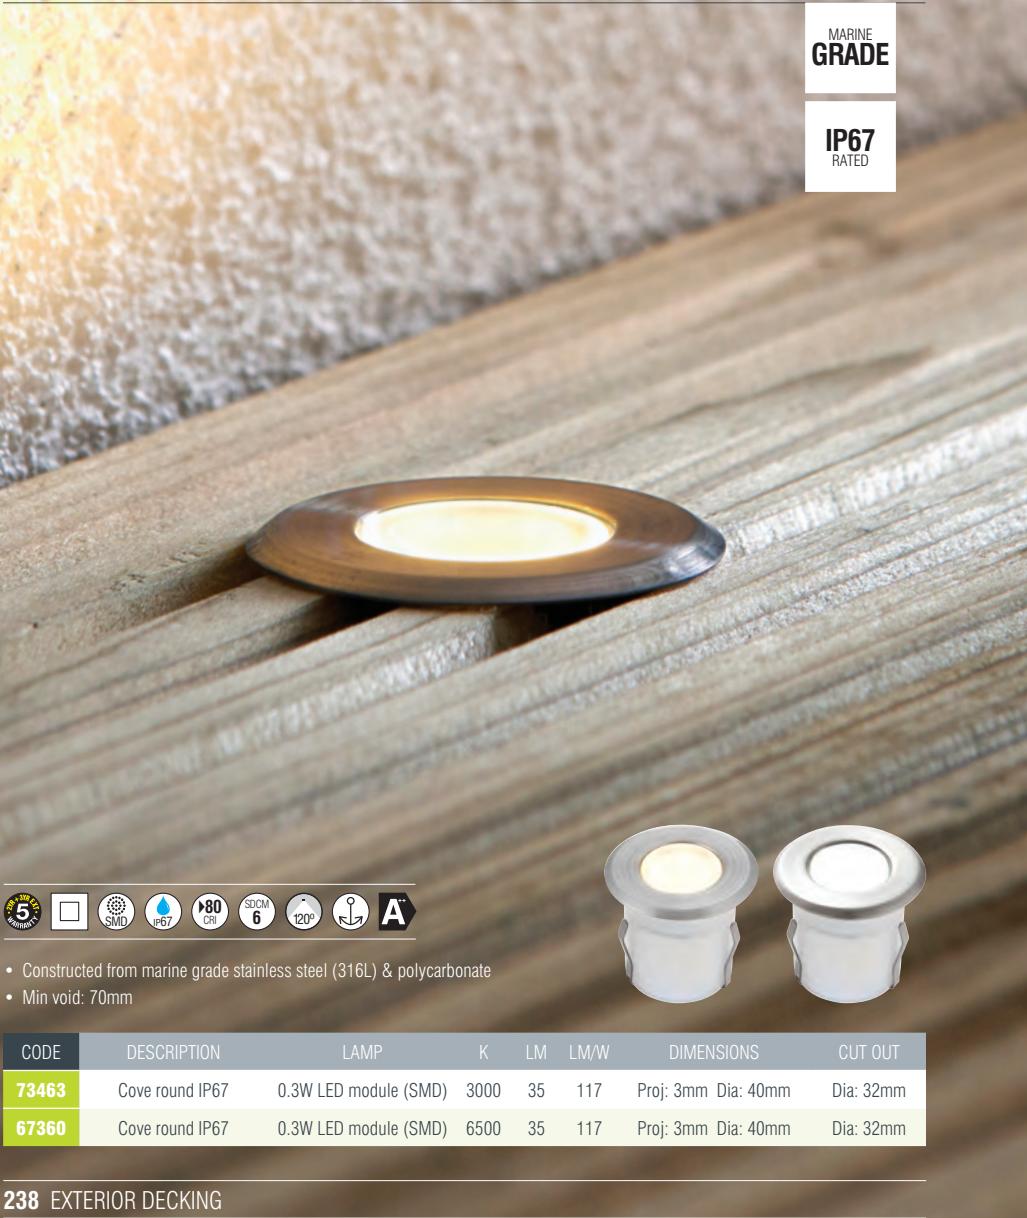

HAYZ

The Hayz LED guide light is manufactured from marine grade stainless steel, making this recessed fitting suitable for application in coastal environments. With an IP67 rating, this is assured for placement on walkways and decking areas. The Hayz comes in two colour temperatures, 3000K or 6500K.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | CUT OUT |
|--------------|-----------------|------------------------|------|----|------|-----------------------------|-----------|
| 73464 | Hayz round IP67 | 0.45W LED module (SMD) | 3000 | 55 | 122 | Proj: 2mm Dia: 60mm | Dia: 50mm |
| 67361 | Hayz round IP67 | 0.45W LED module (SMD) | 6500 | 55 | 122 | Proj: 2mm D: 64mm Dia: 60mm | Dia: 50mm |

The Bodenn is a robust, mains operated ground light which is constructed from marine grade stainless steel (316) and is IP67 rated, making it ideal for coastal areas. The plastic exterior is to be fitted into the ground and then the light simply screws in on top. It is ideal for lighting up paths and driveways. Can also be used as a decking light without using the plastic casing.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | | CUT OUT |
|-------|-------------|-----------------------|------|-----|------|------------|-----------|-------------------|
| 78647 | Bodenn IP67 | 1.3W LED module (COB) | 3000 | 140 | 108 | Proj: 2mm | Dia: 45mm | H: 92mm Dia: 39mm |
| 78646 | Bodenn IP67 | 1.3W LED module (COB) | 4000 | 140 | 108 | Proj: 2mm | Dia: 45mm | H: 92mm Dia: 39mm |

The Hoxton is a recessed ground light made from stainless steel with a glass diffuser and benefits from having integrated LED. This strong and sturdy fitting is IK08 and IP67, meaning it can withstand the elements. It also boasts an adjustable light head, allowing for it to be tilted outside the can and ensure precise light projection.



PILLAR MARINE GRADE

The pillar is a walk over ground recessed fitting available in a choice of stainless steel or marine grade stainless steel finish, plus a choice of round or square design. All fittings within this range are suitable for use with energy compatible lamps.



| CODE | DESCRIPTION | LAMP | DIMENSIONS | CUT OUT |
|--------------|---------------------------------|-----------------|-------------------------------|------------|
| 52212 | Pillar round marine grade IP65 | GU10 (required) | Proj: 5mm H: 150mm Dia: 105mm | Dia: 102mm |
| 52211 | Pillar square marine grade IP65 | GU10 (required) | Proj: 5mm H: 150mm Sq: 105mm | Dia: 102mm |

The pillar is a walk over ground recessed fitting available in a choice of stainless steel or marine grade stainless steel finish, plus a choice of round or square design. All fittings within this range are suitable for use with energy compatible lamps.



| CODE | DESCRIPTION | LAMP | DIMENSIONS | CUT OUT |
|-----------------|--------------------|-----------------|-------------------------------|------------|
| GH98042V | Pillar round IP65 | GU10 (required) | Proj: 5mm H: 150mm Dia: 105mm | Dia: 102mm |
| GH88042V | Pillar square IP65 | GU10 (required) | Proj: 5mm H: 150mm Sq: 105mm | Dia: 102mm |

Recessed ground light with a driver on board LED module. The reflective lens offers high lumen output, in daylight white. This is a sealed unit with complete pre terminated cable. Finished in stainless steel and available in round or square.



The Luminatra is a versatile bright LED spotlight. Comes with a spike for use at ground level or can be wall mounted. Available in a choice of lamp colour.



LANCE

The Lance is a durable spike light finished in matt black and comes with integrated LED. Its IP65 rating means it is water resistant & ideal for outdoors. The Lance spike is perfect for lighting up walls, signs and other elements in the garden.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|-------------|---------------------|------|-----|------|--------------------|
| 79192 | Lance IP65 | 7W LED module (COB) | 4000 | 550 | 79 | H: 370mm Dia: 60mm |

OPAZ MV

Mains voltage spike light constructed in robust die cast aluminium, with a smart black finish. This adjustable spotlight is placed in the ground with the spike provided, and can be angled to give effective accent lighting in any outdoor environment.



| CODE | DESCRIPTION | LAMP | DIMENSIONS |
|----------------|--------------------|-----------------|----------------------------|
| POLGU10 | Opaz MV spike IP44 | GU10 (required) | H: 355mm W: 120mm D: 100mm |

EMERGENCY

We offer a wide range of emergency lighting, from guides to recessed fittings. All of a high quality and spec, to ensure effective lighting of exit paths in an emergency situation.



| | |
|---------------|-----|
| GUIDE | 250 |
| RECESSED | 255 |
| WALL | 258 |
| EMERGENCY KIT | 260 |

SIGHT PLUS

Reliable, robust, weatherproof and functional. The Sight LED bulkhead is available as a maintained or non-maintained emergency fitting. The daylight white 2W LED module offers 150 lumens for up to 3 hours when power is lost. Supplied with a self adhesive emergency sign kit, additional fitting accessories include a wedge and recessed housing for alternative positioning.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|--------------|-------------------------------|------|-----|------|------------------------------|
| 72636 | Sight Plus EM IP65 2W | 6000 | 136 | 68 | Proj: 74mm H: 106mm W: 352mm |
| 72637 | Sight Plus ENM IP65 2W | 6000 | 136 | 68 | Proj: 74mm H: 106mm W: 352mm |
| 72639 | Sight Plus wedge accessory | | | | H: 135mm W: 105mm L: 350mm |
| 72638 | Sight Plus recessed accessory | | | | H: 35mm W: 157mm L: 394mm |

SIGHT ECO

Slim emergency maintained & non-maintained bulkhead, supplied with a self adhesive emergency sign kit. The 3W LED module provides up to 3 hours of light when power is lost.



| CODE | DESCRIPTION | FINISH | LAMP | K | LM | LM/W | DIMENSIONS |
|--------------|----------------|-------------|---------------------|------|-----|------|------------------------------|
| 72640 | Sight Eco IP65 | Gloss white | 3W LED module (SMD) | 6500 | 100 | 33 | Proj: 58mm L: 260mm W: 100mm |

SIGHT BOX

The Sight Box is our maintained wall mounted emergency light, suitable for all applications where clear signage is required in retail and commercial environments. It has two conduit entry points for flexible fitting and is supplied with all the ISO 7010 directional signs. The 1.5W LEDs provides 3 hours of light to illuminate the sign when power is lost.



| CODE | DESCRIPTION | FINISH | LAMP | K | LM | LM/W | DIMENSIONS | |
|--------------|--------------|-------------|-----------------------|------|----|------|------------|-------------------|
| 73796 | Sight Box EM | Gloss white | 1.5W LED module (SMD) | 6000 | 28 | 19 | Proj: 65mm | H: 190mm W: 390mm |

SIGHT 4-IN-1


The Sight 4-in-1 is a multi function maintained LED emergency guide fitting. It can be ceiling mounted in two positions, suspended and recessed, it can also be fitted to a wall from either side or the back. The 1W LEDs provide 3 hours of light to illuminate the sign when power is lost.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS | | MIN VOID | CUT OUT | |
|--------------|--------------------|------|----|------|--------------|----------|----------|---------|------------|
| 72644 | Sight 4-in-1 EM 1W | 6500 | 20 | 20 | H: 250-600mm | L: 350mm | W: 40mm | 100mm | 360 x 60mm |

SIGHT RECESSED

Emergency maintained, LED recessed guide fitting for ceilings. The 3W LEDs provide 160 lumens for up to 3 hours when power is lost.



MAINTAINED



NON
MAINTAINED



- Constructed from steel & polycarbonate
- Gloss white finish
- 3W LED module (SMD)

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS | MIN VOID | CUT OUT |
|--------------|----------------------|------|-----|------|------------------------------|----------|-------------|
| 72641 | Sight recessed EM 3W | 6000 | 160 | 53 | Proj: 11mm W: 138mm L: 410mm | 200mm | 392 x 112mm |


KYLE

The stylish silver finish to this standalone emergency recessed downlight makes it ideal for offices, corridors and stairwells in commercial properties. Battery pack and components fit together and are simply passed through the cut out into the void.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | MIN VOID | CUT OUT | TIFF |
|--------------|-------------|-----------------|------|-----|------|---------------------|----------|-----------|------|
| 76768 | Kyle ENM | 3W LED Hi Power | 6500 | 200 | 67 | Proj: 3mm Dia: 68mm | 250mm | Dia: 55mm | 18° |

The Cyclo 2 is a self-contained emergency fitting, with built in battery. A recessed guide light for indoor application, this product is fitted with a 3W LED, charging indicator and test button. The high capacity battery provides 3 hours of emergency power. A special corridor lens option is also available. The lens casts the light exactly where it is required.

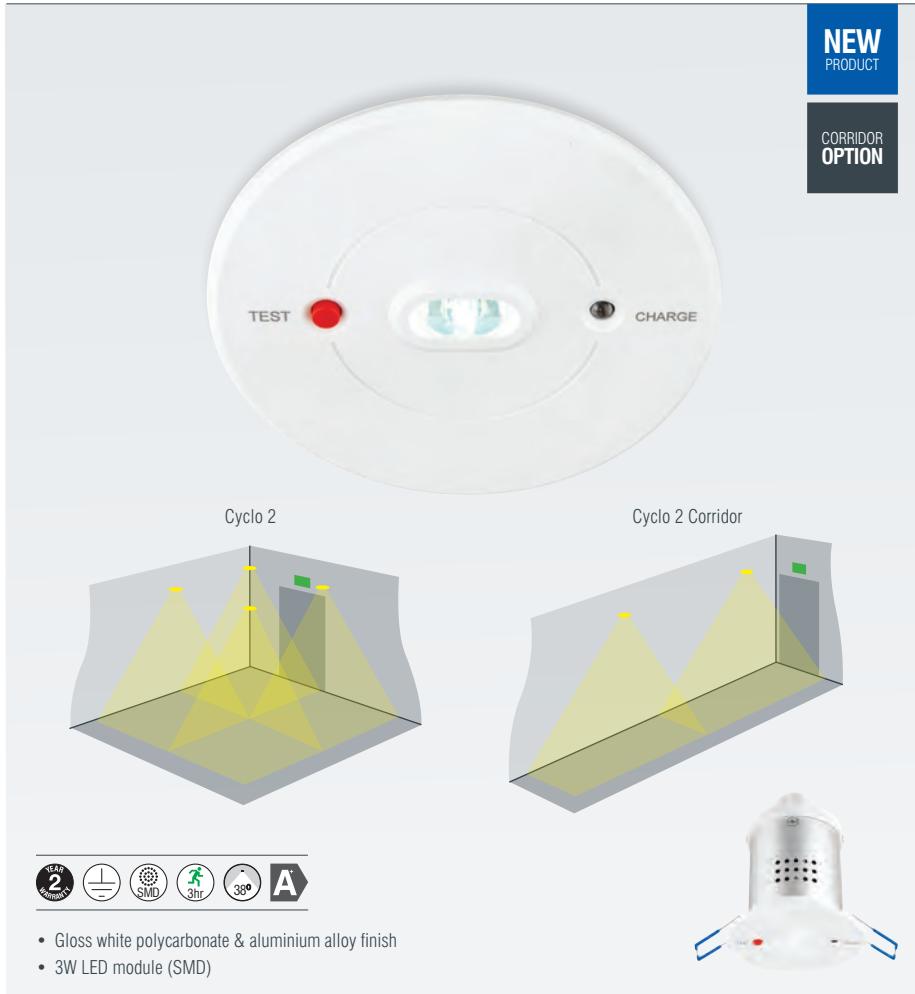

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS | MIN VOID | CUT OUT |
|--------------|-------------------------|------|-----|------|-------------------------------|----------|-----------|
| 76383 | Cyclo 2 ENM 3W | 6250 | 180 | 60 | Proj: 3mm Dia: 110mm H: 125mm | 180mm | Dia: 90mm |
| 76384 | Cyclo 2 corridor ENM 3W | 6250 | 180 | 60 | Proj: 3mm Dia: 110mm H: 127mm | 180mm | Dia: 90mm |



SIGHT TWIN SPOT

The Sight Twin Spot is a non-maintained emergency LED fitting for indoor and outdoor use. Complete with a fault alarm which will beep and flash when not installed correctly. Each head is adjustable for angled illumination when needed. The two 3W Hi Power LEDs provide 570 lumens for up to 3 hours when power is lost.



SIGHT TWIN SPOT

The Sight Twin Spot is a non-maintained emergency LED fitting for indoor use. Each head is adjustable for angled illumination when needed. The two 3W Hi Power LEDs provide 400 lumens for up to 3 hours when power is lost.



EMERGENCY LED CONVERSION KIT

Our LED emergency conversion kit has been designed to work with a wide range of products that require 3 hour emergency solutions. The unit has an intelligent automatic recharging function coupled with deep discharge protection. It has a wide voltage output range of 6V to 60V and the constant current mode is controlled automatically. It is a compact design that can be used internally or externally and is supplied with a charging LED and an option test switch.



| CODE | DESCRIPTION | SPECIFICATION | DIMENSIONS |
|--------------|-----------------------------------|--------------------|--------------------------|
| 54759 | Emergency LED conversion kit EMST | 3.6V 3000mAh 6-60V | H: 30mm W: 43mm L: 180mm |

EMERGENCY LED CONVERSION KIT

Our LED emergency conversion kit has been designed to work with our 60W Sirio panel & orbitalPRO 15W to deliver the required 3 hour emergency lighting. Supplied with all the cables that you need, a charging LED and clip on bezel for fitting in ceiling tiles and an optional test switch, it is straightforward to install to the LED driver and panel.



| CODE | DESCRIPTION | SPECIFICATION | DIMENSIONS |
|--------------|-----------------------------------|----------------------|--------------------------|
| 75486 | Emergency LED conversion kit EMST | 3.6V 3000mAh 60-120V | H: 30mm W: 43mm L: 200mm |



LAMP & ACCESSORY

Many of our products can be utilised even further with our accessories. It contains everything from lamps, to drivers to sensors, all to help give you more choice to suit your lighting requirements.

| | |
|-------------|-----|
| GU10 | 264 |
| G9 | 270 |
| R7s | 272 |
| B22 | 273 |
| E27 | 274 |
| E14 | 277 |
| TUBE | 278 |
| TRANSFORMER | 279 |
| DRIVER | 280 |
| DIMMER | 282 |
| SENSOR | 283 |
| CONNECTOR | 287 |

GU10 SMART

The GU10 Smart is a dimmable tuneable white LED lamp. With a range from 2700K to 6500K this lamp is ideal for creating the right ambience. This smart lamp can all be controlled via the SaxbySmart app, allowing you ultimate control with your lighting, whether it's changing colour, dimming, switching on and off or using the timer set up feature. It is also compatible with Amazon Alexa and Google Home to allow you to control your lights with your voice.

saxbysmart
INTELLIGENT LIGHTING®

NEW
PRODUCT

SMART
2700-6500K



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS | |
|-------|-------------|------|-------------------|-----------|------|------------|-------------------|
| 79308 | GU10 Smart | | 4.5W LED GU10 CCT | 2700-6500 | 300 | 67 | H: 72mm Dia: 50mm |

GU10 LED SMD

A super bright 7W SMD GU10 lamp with up to 600 lumens, available in warm white, cool white and daylight white incorporating the latest LED technology. This ensures the lamp can be used safely within enclosed heads, such as outdoor, bathroom and fire recessed cans, with no reduction in performance or lifetime. The 60° angle makes this an ideal choice for broad light coverage. This range is the equivalent to a 75W halogen, dimmable options available.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS | |
|-------|---------------------|---|------|------|------------|-------------------|
| 70257 | GU10 LED SMD 60° 7W | | 3000 | 580 | 83 | H: 54mm Dia: 50mm |
| 70258 | GU10 LED SMD 60° 7W | | 4000 | 590 | 84 | H: 54mm Dia: 50mm |
| 74045 | GU10 LED SMD 60° 7W | | 6000 | 600 | 86 | H: 54mm Dia: 50mm |
| 76795 | GU10 LED SMD 7W | | 3000 | 500 | 71 | H: 55mm Dia: 50mm |
| 76796 | GU10 LED SMD 7W | | 4000 | 500 | 71 | H: 55mm Dia: 50mm |

GU10 LED SMD

A bright, 6W SMD GU10 lamp in warm white, incorporating the latest LED technology. With a beam angle of 120° this fills the rooms with light.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|----------------------------|------|-----|------|-------------------|
| 78856 | GU10 LED SMD 120° 3000K 6W | 3000 | 460 | 77 | H: 59mm Dia: 50mm |
| 78857 | GU10 LED SMD 120° 4000K 6W | 4000 | 460 | 77 | H: 59mm Dia: 50mm |
| 78858 | GU10 LED SMD 120° 6000K 6W | 6000 | 460 | 77 | H: 59mm Dia: 50mm |

GU10 LED SMD

A bright, 6W SMD GU10 lamp, incorporating the latest LED technology. With a beam angle of 38° this offers directional light and reduces glare.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|---------------------|------|-----|------|-------------------|
| 78859 | GU10 LED SMD 38° 6W | 3000 | 420 | 70 | H: 54mm Dia: 50mm |
| 78860 | GU10 LED SMD 38° 6W | 4000 | 420 | 70 | H: 54mm Dia: 50mm |
| 78861 | GU10 LED SMD 38° 6W | 6000 | 420 | 70 | H: 54mm Dia: 50mm |
| 78862 | GU10 LED SMD 38° 6W | 3000 | 420 | 70 | H: 54mm Dia: 50mm |
| 78863 | GU10 LED SMD 38° 6W | 4000 | 420 | 70 | H: 54mm Dia: 50mm |
| 78864 | GU10 LED SMD 38° 6W | 6000 | 420 | 70 | H: 54mm Dia: 50mm |

GU10 LED SMD


Ideal for products where the lamps are visible. Identical to regular GU10 halogen lamps and have a similar light output, but use less energy. Available in two colour temperatures. These are not suitable for use in enclosed heads and fire rated cans.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|-----------------|------|-----|------|-------------------|
| 73256 | GU10 LED SMD 5W | 3000 | 400 | 80 | H: 54mm Dia: 50mm |
| 73257 | GU10 LED SMD 5W | 4000 | 400 | 80 | H: 54mm Dia: 50mm |

GU10 LED COB


Our glass GU10 LED lamp is an ideal replacement for the older style halogen lamps. The latest LED and driver technology means that these lamps are suitable for use in enclosed heads can be used in all applications with no reduction in performance or lifetime of the lamp. Available in 3000K and 4000K.

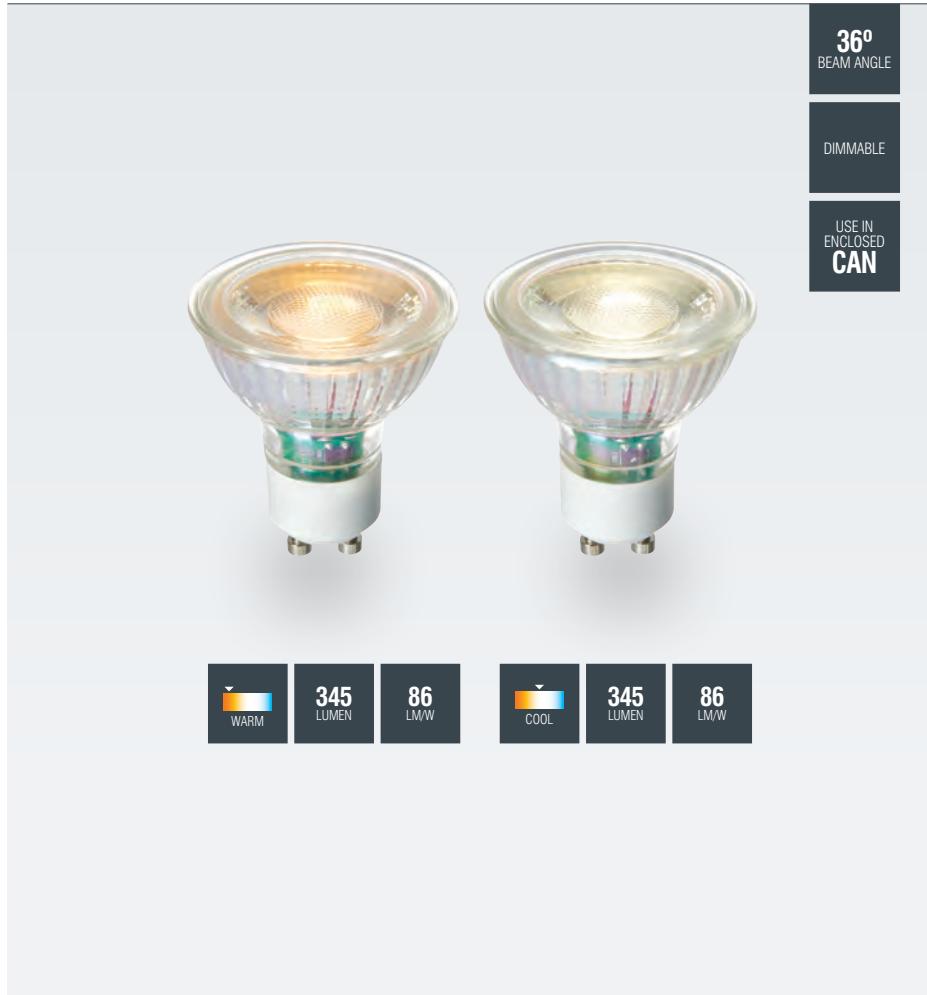

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|-----------------|------|-----|------|-------------------|
| 76793 | GU10 LED COB 4W | 3000 | 345 | 86 | H: 54mm Dia: 50mm |
| 76794 | GU10 LED COB 4W | 4000 | 345 | 86 | H: 54mm Dia: 50mm |

G9 LED SMD



LED G9 lamps with a choice of colour temperature. These lamps can be used within enclosed fittings making them suitable for use in indoor, bathroom and outdoor fittings.

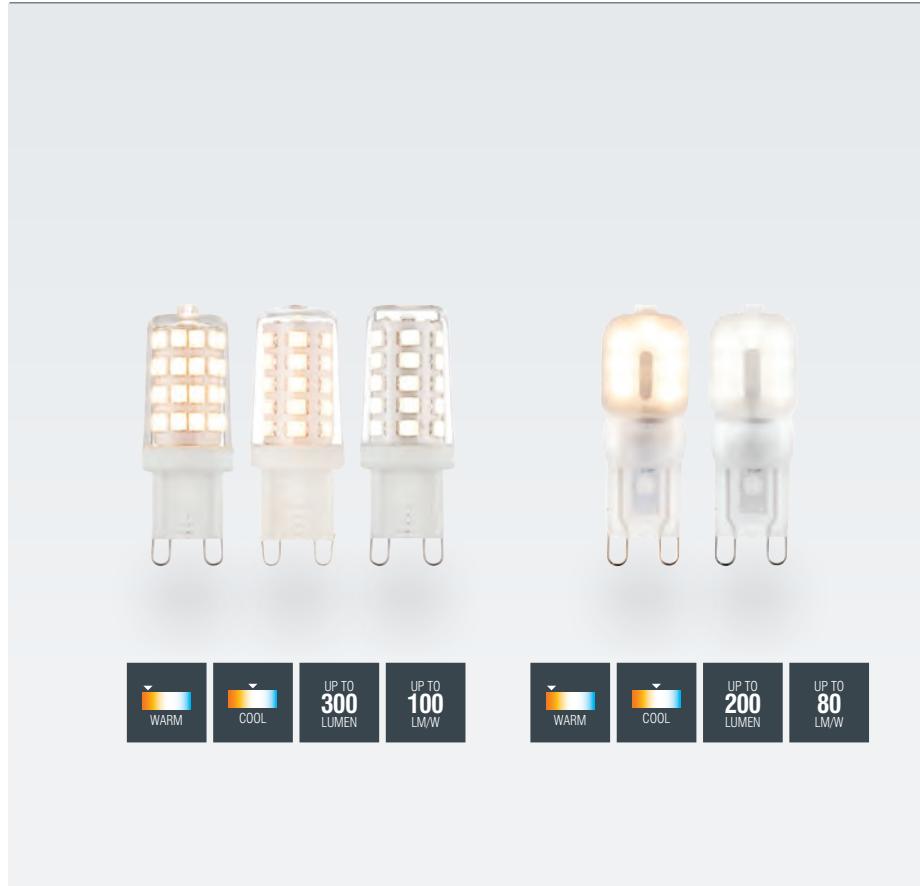

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|-----------------|-----|------|------|-----------------------|
| 76140 | G9 LED SMD 2.3W | 2 A | 4000 | 220 | 96 H: 47mm Dia: 17mm |
| 76139 | G9 LED SMD 2.3W | 2 A | 3000 | 220 | 96 H: 47mm Dia: 17mm |
| 76792 | G9 LED SMD 3W | 2 A | 3000 | 300 | 100 H: 49mm Dia: 17mm |
| 76790 | G9 LED SMD 2.5W | 2 A | 3000 | 200 | 80 H: 48mm Dia: 16mm |
| 76791 | G9 LED SMD 2.5W | 2 A | 4000 | 200 | 80 H: 48mm Dia: 16mm |

G9 ECO HALOGEN TWIN PACK


Our new G9 eco halogen lamps are dimmable and come supplied as twin packs. Options include 18W and 28W lamps, ranging from 204 to 370 lumens of warm white light output per lamp.

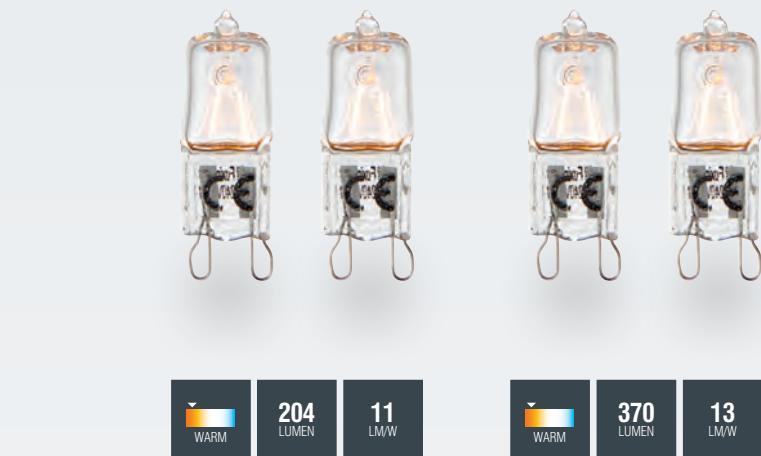

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|--------------------|--------------------------|------|-----|------|-------------------|
| 70064 | G9 eco halogen 18W | 2 x 18W G9 clear capsule | 2800 | 204 | 11 | H: 43mm Dia: 13mm |
| 70065 | G9 eco halogen 28W | 2 x 28W G9 clear capsule | 2800 | 370 | 13 | H: 43mm Dia: 13mm |

R7S ECO HALOGEN


Linear halogen lamp range, offering from 1375 lumens up to 4645 lumens. Available in two lengths, 78mm and 117mm.

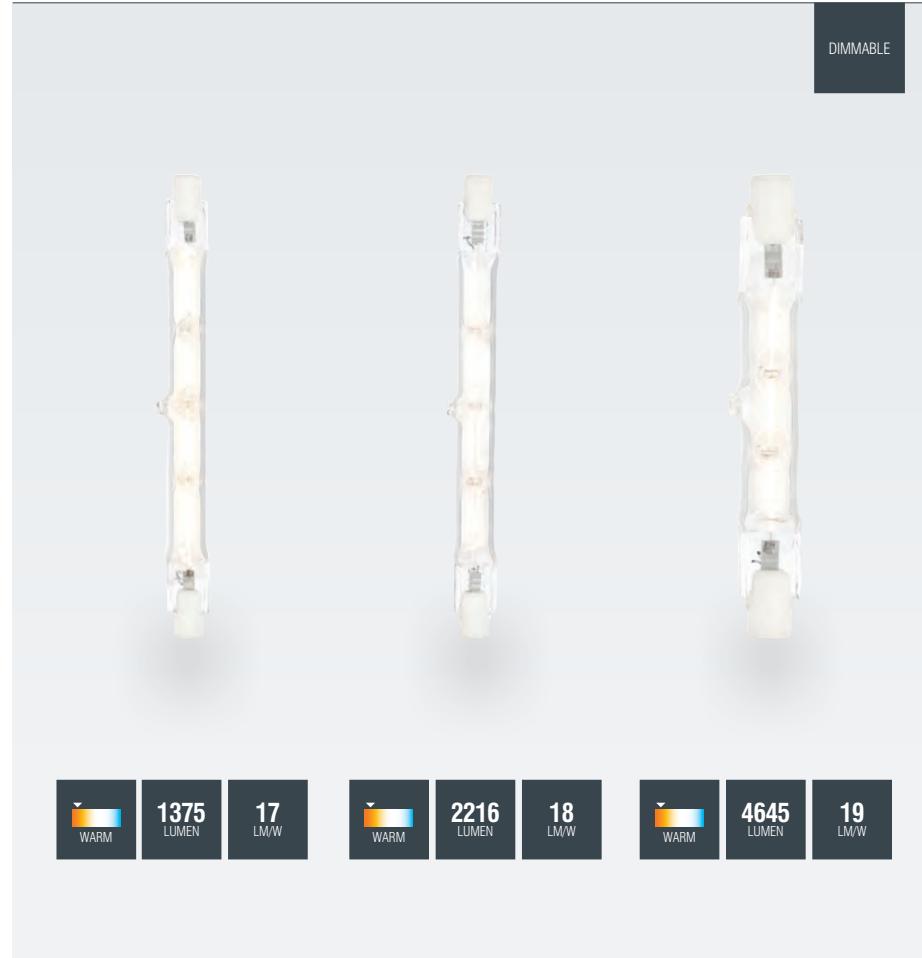

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|----------------------|------|-------------------|------|------|----------------------|
| 70059 | R7s eco halogen 80W | | 80W R7s tungsten | 3000 | 1375 | 17 L: 78mm Dia: 9mm |
| 72547 | R7s eco halogen 120W | | 120W R7s tungsten | 3000 | 2216 | 18 L: 117mm Dia: 9mm |
| 70060 | R7s eco halogen 230W | | 230W R7s tungsten | 3000 | 4645 | 20 L: 117mm Dia: 9mm |

B22 LED GLS

Our new range of LED lamps are suitable for indoor and outdoor use. With their high quality light output and superior dimming ability they are perfect for all types of products. These are bright enough to be considered as direct replacements for original incandescent lamps.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|-------------------------|---|------|------|------------------------|
| 76807 | B22 LED GLS 10W | | 3000 | 806 | 81 H: 105mm Dia: 60mm |
| 76800 | B22 LED filament GLS 8W | | 2700 | 1100 | 138 H: 105mm Dia: 60mm |

E27 SMART

The E27 Smart is a dimmable tuneable white LED lamp. With a range from 2700K to 6500K this lamp is ideal for creating the right ambience. This smart lamp can all be controlled via the SaxbySmart app, allowing you ultimate control with your lighting, whether it's changing colour, dimming, switching on and off or using the timer set up feature. It is also compatible with Amazon Alexa and Google Home to allow you to control your lights with your voice.

saxbysmart
INTELLIGENT LIGHTING®



NEW
PRODUCT


SMART
2700-6500K

DIMMABLE



“Alexa, turn on the lights”


SaxbySmart is compatible with Amazon Echo and Google Home allowing you to control the lights directly using your own voice.



| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|-------------|------|-----------------|-----------|------|-----------------------|
| 79309 | E27 Smart | 2 A | 10W LED E27 CCT | 2700-6500 | 800 | 80 H: 118mm Dia: 60mm |

E27 LED GLS

Our new range of LED lamps are suitable for indoor and outdoor use. With their high quality light output and superior dimming ability they are perfect for all types of products. These are bright enough to be considered as direct replacements for original incandescent lamps.

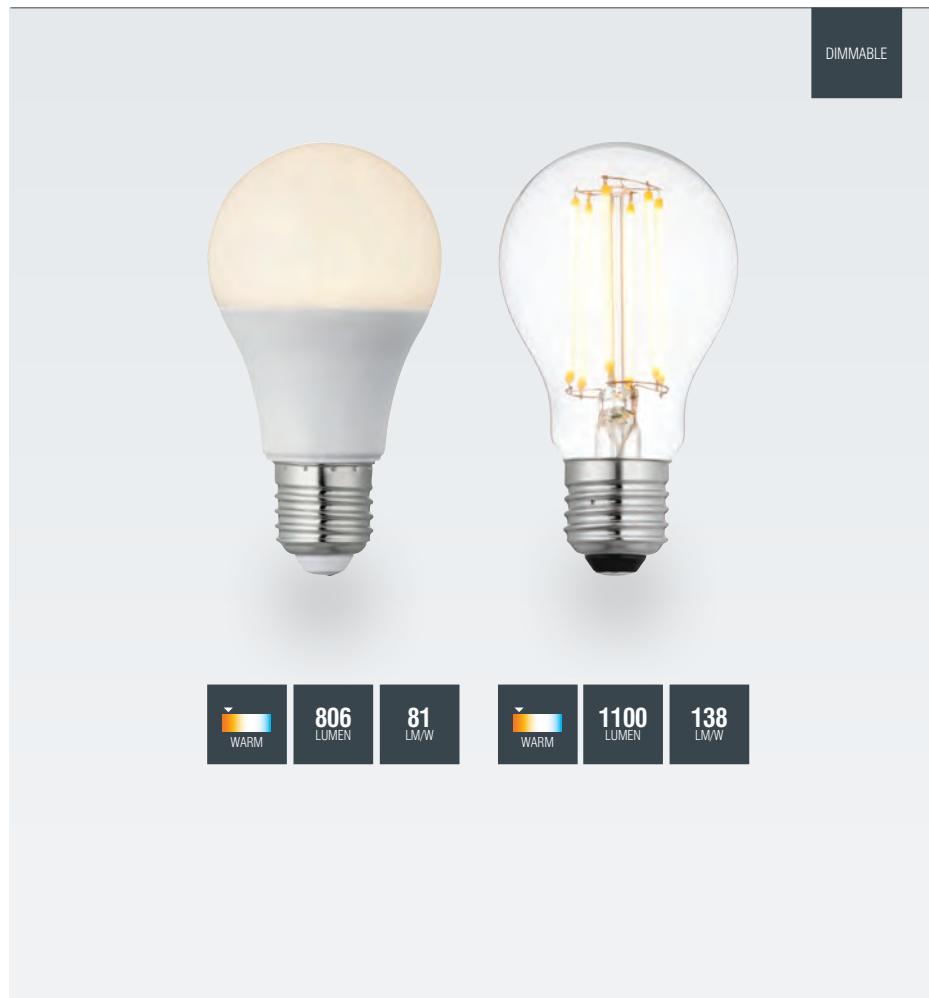

| CODE | DESCRIPTION | LAMP | K | LM | LM/W | DIMENSIONS |
|-------|-------------------------|------|------|------|------|--------------------|
| 76806 | E27 LED GLS 10W | 2 A | 3000 | 806 | 81 | H: 105mm Dia: 60mm |
| 76799 | E27 LED filament GLS 8W | 2 A | 2700 | 1100 | 138 | H: 105mm Dia: 60mm |

E27 LED FILAMENT PEAR & GLOBE

Filament lamps are the latest in LED technology. Designed to look like the original incandescent lamps, whilst offering all the advantages of LED, such as low running costs, these are the ideal lamp replacement for all decorative light fittings.

DIMMABLE



450
LUMEN

75
LM/W



810
LUMEN

116
LM/W



810
LUMEN

116
LM/W

E14 LED GOLF & CANDLE

Our new range of dimmable LED lamps are suitable for indoor and outdoor use. With their high quality light output and superior dimming ability they are perfect for all types of products. These are bright enough to be considered as direct replacements for original incandescent lamps.

DIMMABLE



350
LUMEN

78
LM/W



370
LUMEN

93
LM/W

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|---------------------------------|------|-----|------|---------------------|
| 76803 | E27 LED filament pear 6W | 1800 | 450 | 75 | H: 140mm Dia: 64mm |
| 76801 | E27 LED filament globe 95mm 7W | 2700 | 810 | 116 | H: 130mm Dia: 95mm |
| 76802 | E27 LED filament globe 125mm 7W | 2700 | 810 | 116 | H: 165mm Dia: 125mm |

| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|----------------------------|------|-----|------|--------------------|
| 76804 | E14 LED golf 4.5W | 3000 | 350 | 78 | H: 80mm Dia: 45mm |
| 76805 | E14 LED candle 4.5W | 3000 | 350 | 78 | H: 100mm Dia: 38mm |
| 76797 | E14 LED filament golf 4W | 2700 | 370 | 93 | H: 78mm Dia: 45mm |
| 76798 | E14 LED filament candle 4W | 2700 | 370 | 93 | H: 98mm Dia: 35mm |

LED TUBE

This LED tube range boasts a high lumen output of up to 2600 lumens and the ideal choice to be fitted into our Oxo products.



| CODE | DESCRIPTION | K | LM | LM/W | DIMENSIONS |
|-------|------------------|-----|------|------|-------------------------|
| 78956 | LED Tube 4ft 18W | 2 A | 4000 | 2000 | 111 L: 1200mm Dia: 26mm |
| 78957 | LED Tube 5ft 23W | 2 A | 4000 | 2500 | 109 L: 1500mm Dia: 26mm |

12V TRANSFORMER

Our dimmable 60W electronic transformer is ideal for use with recessed lights that still use 12V halogen lamps. It is pre terminated with cables, making installation simple and quick.



| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|-------|------------------------------------|---------------------------|--------------------------|
| ET60R | 12V transformer 20W - 60W dimmable | 2 □ ○ Black polycarbonate | H: 20mm W: 32mm L: 118mm |

LED DRIVER CONSTANT VOLTAGE



| CODE | DESCRIPTION | DIMMABLE | VOLTAGE | WATTAGE | DIMENSIONS |
|--------------|---|----------|---------|---------|--------------------------|
| 43810 | LED driver constant voltage 12V 12W | No | 12V | 12W | H: 22mm W: 39mm L: 98mm |
| 47989 | LED driver constant voltage 12V 20W | No | 12V | 20W | H: 28mm W: 44mm L: 113mm |
| 79335 | LED driver constant voltage 12V 60W | No | 12V | 60W | H: 32mm W: 61mm L: 184mm |
| 79382 | LED driver constant voltage 24V 20W | No | 24V | 20W | H: 28mm W: 44mm L: 113mm |
| 79328 | LED driver constant voltage 24V 40W | No | 24V | 40W | H: 24mm W: 52mm L: 166mm |
| 79329 | LED driver constant voltage 24V 75W | No | 24V | 75W | H: 32mm W: 61mm L: 184mm |
| 79381 | LED driver constant voltage 24V 150W | No | 24V | 150W | H: 34mm W: 67mm L: 210mm |
| 79332 | LED driver constant voltage 24V 25W | ○ | 24V | 25W | H: 30mm W: 52mm L: 128mm |
| 79333 | LED driver constant voltage 24V 50W | ○ | 24V | 50W | H: 32mm W: 61mm L: 184mm |
| 79334 | LED driver constant voltage 24V 100W | ○ | 24V | 100W | H: 34mm W: 67mm L: 210mm |
| 79330 | LED driver constant voltage IP67 24V 75W | No | 24V | 75W | H: 39mm W: 64mm L: 186mm |
| 79331 | LED driver constant voltage IP67 24V 150W | No | 24V | 150W | H: 40mm W: 70mm L: 191mm |

LED DRIVER CONSTANT CURRENT



| CODE | DESCRIPTION | DIMMABLE | VOLTAGE | WATTAGE | DIMENSIONS |
|--------------|---------------------------------------|----------|---------|---------|--------------------------|
| 43816 | LED driver constant current 12W 350mA | No | 350mA | 12W | H: 22mm W: 39mm L: 98mm |
| 46896 | LED driver constant current 20W 350mA | No | 350mA | 20W | H: 28mm W: 44mm L: 113mm |
| 46897 | LED driver constant current 18W 350mA | ○ | 350mA | 18W | H: 28mm W: 44mm L: 113mm |

DIMMER MODULE

A trailing edge dimmer module that can be fitted onto a standard wall plate and can dim up to 150W of LED fittings. Also compatible with incandescent and halogen fittings up to a maximum rating of 400W. Compatible with our ShieldECO, Orbital and LED lamp ranges.



| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|-------|--------------------|--------|---|
| 75021 | Dimmer Module 150W | | Grey ABS plastic H: 62mm W: 26mm D: 45mm |

MICROWAVE & PIR PRESENCE DETECTORS

Discrete surface mounted sensors that react to any movement in range. The Microwave presence detector has a 360° detection angle and range of 5 metres when ceiling mounted and 10 metres when wall mounted, the unit can control a 800W resistive load and 200W of driver load. The PIR presence detector has a 360° detection angle and range of 6 metres, the PIR can control a 1600W resistive load and 500W of driver load. Both perfect for low use areas, such as corridors, and it is ideal for energy saving applications.



MICROWAVE PRESENCE DETECTOR
• 360° (180° on a wall) detection angle, 5m range with a 10 sec - 10 min timer function, 5 lux to 200 lux range

PIR PRESENCE DETECTOR
• 360° detection angle, 4.5m maximum range with a 10 sec - 4 min timer function

| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|-------|--|--------|--|
| 54415 | Microwave presence detector flush IP44 | | Gloss white polycarbonate Proj: 44mm Sq: 105mm |
| 54413 | PIR presence detector flush | | Gloss white polycarbonate Proj: 40mm Dia: 110mm |

PIR PRESENCE DETECTOR


Our recessed PIR sensor is an unobtrusive unit that allows you to switch the lights on in corridors and rooms when someone enters. With a 360° detection angle and range of 4.5 metres the PIR can control a 2000W resistive load and 600W of driver load. Perfect for low use areas and ideal for energy saving applications.



| CODE | DESCRIPTION | FINISH | DIMENSIONS | CUT OUT |
|--------------|--------------------------------|---------------------------|----------------------|-----------|
| 54414 | PIR presence detector recessed | Gloss white polycarbonate | Proj: 18mm Dia: 76mm | Dia: 60mm |

PIR SECURITY DETECTOR

Adjustable wall PIR sensor. Suitable for traditional and LED light fittings and works with multiple lights. IP44 rated for outdoor use.

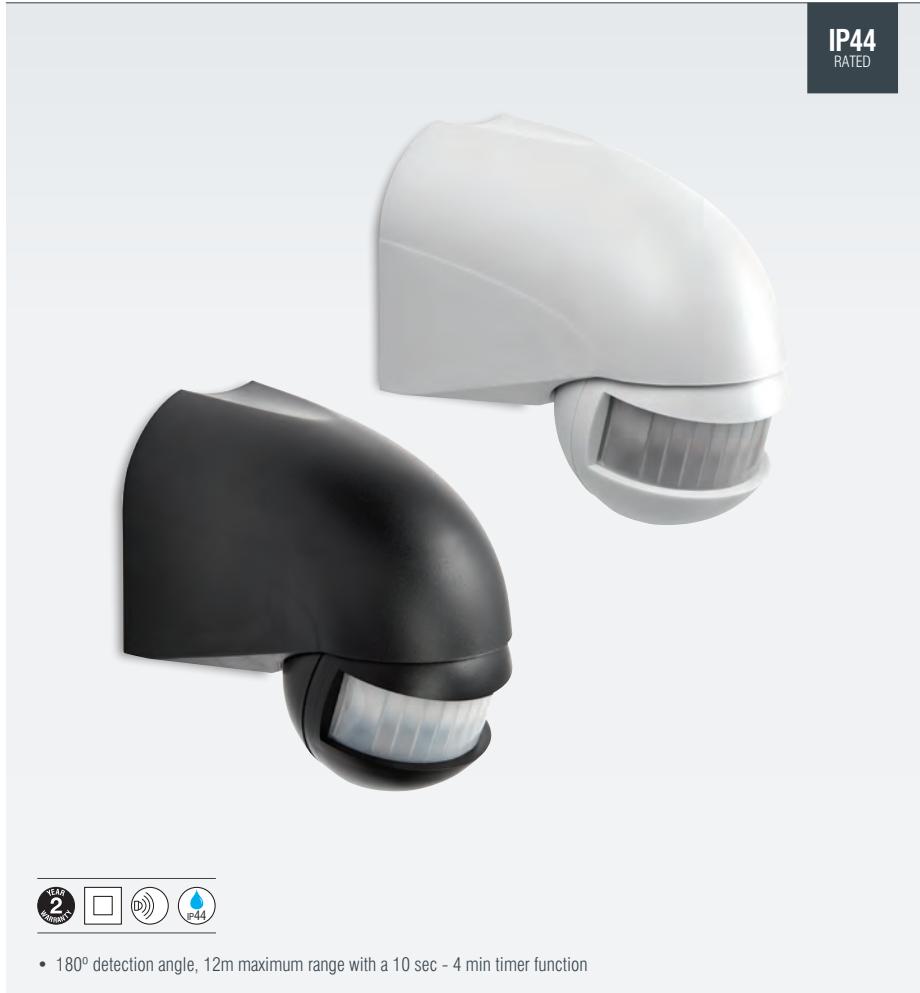

| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|--------------|---------------------------------|-------------------|-----------------------------|
| 70471 | PIR security detector wall IP44 | White ABS plastic | Proj: 100mm H: 92mm W: 65mm |
| 67346 | PIR security detector wall IP44 | Black ABS plastic | Proj: 100mm H: 92mm W: 65mm |

TWILIGHT DETECTOR

This control device is designed to switch a light fitting on and off automatically at dusk and dawn. The photocell can be used with multiple lights and is complete with a switching delay function.



- Fully adjustable 5 - 300lux

| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|-------|-----------------------------|-------------------|-----------------------------|
| 70470 | Twilight detector wall IP44 | White ABS plastic | Proj: 40mm H: 110mm W: 70mm |
| 67345 | Twilight detector wall IP44 | Black ABS plastic | Proj: 40mm H: 108mm W: 69mm |

IP44
RATED



INLINE IP68 CONNECTOR

Inline IP68 connector, includes a three way terminal block, and come with two different sized seal bushes. They can be submerged to a depth of 2m for 1 hour.



| CODE | DESCRIPTION | FINISH | DIMENSIONS |
|-------|-------------------------------------|----------------------|-------------------------|
| 61514 | Inline IP68 connector tee IP68 | Black & yellow nylon | L: 84mm H: 30mm W: 90mm |
| 61515 | Inline IP68 connector straight IP68 | Black & yellow nylon | L: 90mm Dia: 33mm |



TECHNICAL & INDEX

Optatis ex eos moluptiorest fuga. Nes doluptatia
nonseca epernatem doluptam serem inum velit as
alis doloribus, et ut vit litiae sus ex ea sundis sunt
ium volorunt harci des volore reicit faceseq uistota
si dus ius is ex endunt.

| | |
|-----------|-----|
| TECHNICAL | 290 |
| T&C'S | 297 |
| INDEX | 298 |

Icons Guide

Each of our products have appropriate icons displayed against them. Our handy icon guide helps to explain what each of our icons mean.



Energy rating



Color Rendering Index



Suitable for use in 30, 60 or 90 minute fire rated ceilings



Unified Glare Rating



Denotes IP rating (see page 292)



Loader DaTa files available



Part E (BS EN140 acoustics) building regulations



Dimmable with a compatible lamp/dimmer switch



Walk over



Dimmer switch



Drive over



Push switch



High grade stainless steel, suitable for marine environment



Photocell and PIR sensor



Meets EN 62262 impact resistance



PIR sensor



30° beam angle



Infra-red hand sensor



1, 2, 3 or 5 year warranty, refer to T&Cs



Includes inline infra-red hand sensor



Class 1, earthed product



Includes microwave sensor



Class 2, double insulated product



Includes photocell sensor



Class 3, super extra low voltage product (driver required)



Remote control



Emergency Maintained



RGB remote control



Emergency Non Maintained



De-mist pad



Emergency Maintained Self Test



Integrated shaver socket



Standard Deviation Colour Matching



USB socket

Abbreviations

- ◆ H: Height ◆ W: Width ◆ L: Length ◆ D: Depth ◆ Proj: Projection ◆ Dia: Diameter
- ◆ Sq: Square ◆ K: Kelvin ◆ Lm: Lumens ◆ Lm/W: Lumens per Watt

Lamp Temperature

When thinking about lamp and fitting choice it's important to understand that every light source has two distinct elements. The first part is brightness which is measured in lumens; this is a measure of the amount of light that it will give out.

The second part is the colour temperature, which is measured in kelvin and indicates how cool or warm the light is. Warmer fittings and lamps have low kelvin numbers, whereas cooler lamps and fittings will have a kelvin that is high. Choosing the right fitting or lamp helps to create the right effect within your chosen room.

WARM white

1000 2000 3000 4000 5000 6000 7000 8000 9000

COOL white

WARM white (<3800k)



Warmer whites are generally preferred for creating a more relaxed environment in dining, living or reception areas.

COOL white (3900k to 5800k)



Cool white is a good choice for retail and office environments where a simulated natural, outdoor light is preferred. Use in modern contemporary kitchens and bathrooms to complement the décor.

DAYLIGHT white (>5900k)



Perfect for industrial and healthcare applications where the most natural lighting is required.

Finding your LED equivalent

| LED | 3W | 5W | 7W | 9W | 12W |
|--------------|-----|-----|-----|-----|------|
| INCANDESCENT | 25W | 40W | 60W | 75W | 100W |
| HALOGEN | 18W | 28W | 42W | 55W | 70W |
| LUMENS | 200 | 400 | 600 | 800 | 1000 |
| CFL | 5W | 8W | 12W | 15W | 20W |

Ingress Protection (IP) Rating


Each light within our brochure has been given an appropriate IP rating; this relates to the degree of protection the light provides against solid object and water ingress. IP ratings are relevant to anywhere that moisture is prevalent, such as bathrooms, utility rooms and exterior environments. Written as IPxx, the first x defines the level of protection offered from dust; the second x defines the level of protection offered from moisture. The higher the numbers are, the better the protection will be.

| INGRESS PROTECTION | | MOISTURE | |
|--------------------|---|----------|---|
| SOLID OBJECT | | MOISTURE | |
| 1 | Protected against a solid object greater than 50mm such as a hand | 1 | Protected against vertical falling drops of water. Limited ingress permitted |
| 2 | Protected against a solid object greater than 12.5mm such as a finger | 2 | Protected against vertical falling drops of water with enclosure tilted up to 15 degrees from the vertical. Limited ingress permitted |
| 3 | Protected against a solid object greater than 2.5mm such as a screwdriver | 3 | Protected against sprays of water up to 60 degrees from the vertical. Limited ingress permitted |
| 4 | Protected against a solid object greater than 1mm such as a wire | 4 | Protected against water splashes from all directions. Limited ingress permitted |
| 5 | Dust protected. Limited ingress of dust permitted. Will not interfere with operation of the equipment | 5 | Protected against jets of water. Limited ingress permitted |
| 6 | Dust tight. No ingress of dust | 6 | Protected against powerful jets of water. Limited ingress permitted |
| 7 | | 7 | Watertight against the effects of immersion in water between 15cm and 1m for 30 minutes |
| 8 | | 8 | Watertight against the effects of immersion in water under pressure for long periods |

Choose the right IP rating for your location

In most cases a product with a rating of IP44 will be suitable for the majority of locations, but there are certain circumstances where a lower or higher rating would be more appropriate. For products fitted in porches or downlights fitted in soffits, the property will give a certain amount of protection and these can be rated IP23.

For commercial properties we offer wall and ground light products with improved seals that have a higher rating of IP65. Our IP67 rated products are the most resilient, and can withstand almost all weather conditions.

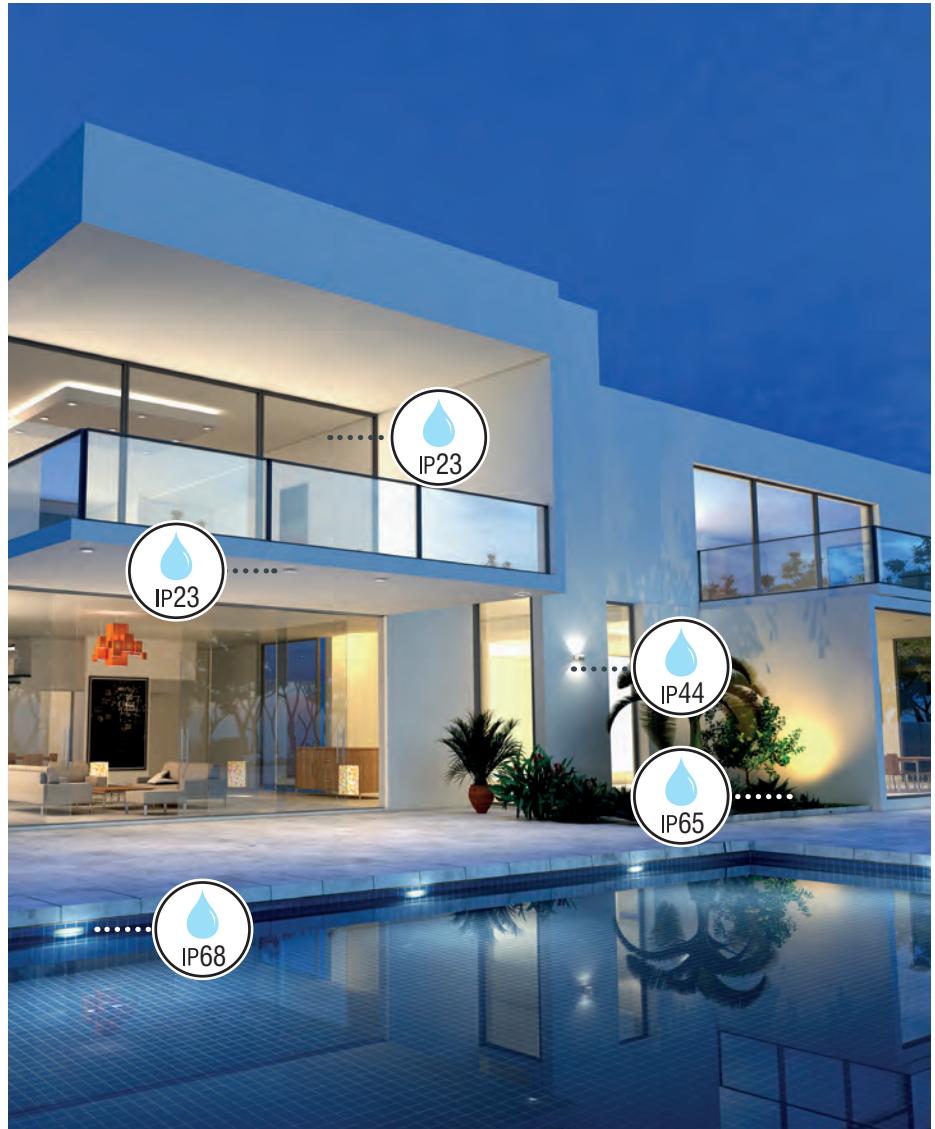

Benefits of LED Lighting

ENERGY EFFICIENCY - The energy saving from an LED lamp is substantial; compared to an incandescent lamp, you will only use around 20% of the energy. They are even more efficient than fluorescent lamps too, saving 20% on the running cost for a similar light output.

MUCH LONGER LIFESPAN - LED lamps have a much longer lifetime, on average 15 times longer than the original incandescent lamps, so they don't need to be replaced as often.

INSTANT LIGHT - Fluorescent energy saving lamps take a long time to reach full brightness, whereas LED alternatives produce light at full intensity instantly.

ENVIRONMENTALLY FRIENDLY - Not only do LED lamps and fittings last much longer, but they use less energy than other light sources.

SAFE - Unlike fluorescent lamps, LED lamps do not contain mercury. This makes them easy to recycle and safe to have around the home too.

LEDs explained

Technology has progressed further, to a point where there is a direct LED equivalent to existing halogen and incandescent lamps. The future is bright too; new technology will see brighter LEDs using even less power than they currently do.



SMD - An established technology now, these LEDs offer a variety of package sizes and light outputs. They are normally used in an array form, to give an even spread of light.



COB - This LED has a number of separate chips embedded in phosphor and mounted on a ceramic package. This gives greatly improved lumens per watt, better cooling and superior light output.



HI POWER - These types of LED offer superior light output, but have higher power requirements. Normally available in 1W or 3W, these require a heatsink to run at the correct temperature.



RGB - Red, green, blue (RGB) LEDs have three separate LEDs embedded in one chip. They allow precise selection for the ultimate in accent lighting.



FILAMENT - The strips of phosphor have tiny LED chips embedded inside. When they are lit, they shine in a similar way to the original incandescent lamps. They are perfect for products with crystal and open shades.



DOB - Driver On Board is a new technology using both SMD and COB LEDs, but without an external driver. The power control circuitry is integrated onto the printed circuit board (PCB) and these are connected directly to the mains power source.

Lamp Data Explained

The lumen figures quoted in the catalogue are for guidance only. The lumen figure is for the entire product and the Lm/W can be used when selecting products which are Part L compliant.

| CODE | DESCRIPTION | FINISH | LAMP TEMP | LM | LM/W |
|-------|------------------------------|------------------------------|--------------------|-----|------|
| 52728 | shieldLED 800 fixed IP65 11W | Satin Nickel & clear acrylic | Warm White – 3000K | 750 | 68 |

• K: 3000 Lm: 750 Lm/W: 68

Colour Rendering Index (CRI)

This figure is a percentage and relates to the ability of the lamp or product to show accurate colours when compared to a reference light source. All of our lamps and integrated products have a CRI in excess of 80 and 65 for outdoor lighting.

Energy Saving - All products supplied with a lamp or light source must have a declared energy rating. This can be found on the packaging. The most energy efficient products are rated A+++. We also include Lm/W figures for all lamps and products with a light source so you can make an informed choice on the best product for your application.

Building regulations

Part B - This regulation refers to the fire safety requirements that new buildings must meet. Recessed products that break the fire barrier during installation must ensure that they are capable of maintaining the original barrier against fire.

Part C - This regulation covers requirements on the flow of air and moisture in a building.

Part E - This regulation also refers to recessed products and their ability to minimise sound passing through from one part of a property to another.

Part L - This regulation outlines minimum energy efficiency requirements for all commercial and domestic properties. All lights fitted must meet minimum Lm/W requirements.

Part P - This regulation refers to the safe installation of all electrical fittings and lighting and the inspection, testing and certification of a property.

Glossary

ELECTRICAL

a.c. - Is the acronym for alternating current.

d.c. - Is the acronym for direct current.

Watt - This is the amount of energy that a product consumes.

mA - This is the rate of flow of electricity, measured in amps. You would normally come across this as the output of a constant current LED driver.

Volts - The volt is a measure of electric potential. The UK mains voltage is 240V.

Constant current - This refers to the output from an LED driver, in these the current output remains the same, i.e. 350mA, and the voltage increases as the power increases.

Constant voltage - This refers to the output from an LED driver, in these the voltage output remains the same, i.e. 12V, and the current increases as the power increases.

Hertz - This is the unit of frequency. The UK mains a.c. supply voltage is set at 50Hz.

Class 1 - This fitting has basic insulation and relies on an earth connection for safety.

Class 2 - This fitting has two layers of insulation and does not require an earth connection. Often known as double insulated.

Class 3 - Sometimes known as Safety Extra Low Voltage (SELV), the operating voltage of these products is lower than 50V and is isolated from the mains supply.

KWh - 1000W of electricity used over the period of one hour.

Light source

LED - Is the acronym for Light Emitting Diode.

Kelvin - This figure defines the colour temperature of visible light. The units are K.

SDCM - This is an acronym for Standard Deviation Colour Matching and is a way of measuring the differences between LEDs of the same colour. Sometimes called the MacAdam Ellipse.

Lumen - A measure of the quantity of visible light from a lamp or product.

RGB - Is the acronym for red, green and blue for an LED that can change colour.

CRI - Is the acronym for Colour Rendering Index. It relates to the ability of the lamp or product to show accurate colours when compared to a reference light source.

Lux - A measure of the intensity of light, defined as 1lm /m².

LM80 - This is a standard for measuring the lumen depreciation of a solid state light source.

Efficiency - Lamp and luminaire efficiency is measured in Lm/W. This gives an accurate comparison between different types of fittings for energy usage.

Sensors

PIR - Also known as passive infrared, the sensor detects the heat energy that all living bodies give off. When a person walks in front of the fitting, the sensor detects the change in the radiation and turns on the light.

Photocell - Sometimes known as a dusk to dawn sensor. The sensor reacts to the ambient light and will turn the fitting on when a pre-set light level is reached. The light will remain on until the light increases to another pre-set level where it will turn off.

Microwave - These have a similar operation to the PIR but work by detecting motion. They send a continuous wave of radiation out and if there is any movement in their range they detect the change in frequency and operate the light. They can be fitted internally as the microwaves will pass through some materials, and can even pass through walls.

Infra-red - These are short range movement sensors and are used for hands free operation of lights where you may have wet hands. The IR sensor is a little module with an emitter and a detector, it emits a beam of infra-red (like your TV remote), and when the beam is broken the detector will activate the sensor.

Touch (Resistive) - A resistive touch switch relies on the natural conductivity of the skin and must be used with a conductive material.

Touch (Capacitive) - Capacitive switches have the advantage of being able to work with non-conductive materials such as wood and plastics. These work by using the electrical charge (static electricity) that the human body naturally has. On touching the sensor, the electrical parameters change and the switch will operate.

Miscellaneous

IP - Is the acronym for ingress protection. The first number refers to the dust proofing and the second to the protection against water.

IK - This is the numerical classification for impact protection of outdoor light fittings.

Maintained - Emergency lights that operate as a normal light fitting and can be controlled with all the other lights in the area, however when the power fails the maintained emergency fitting will continue to operate but at a lower light level.

Non Maintained - Is normally switched off, with its batteries being continuously charged and a green LED showing fully charged. When the power fails then the fitting switches on using its battery supply. Non-maintained fittings are not part of the general lighting but are fittings such as emergency exit signs.

Terms & conditions

Whilst every effort has been made to ensure that the information provided in this catalogue is accurate, we do not accept liability for errors or omissions in the descriptions, data, dimensions or any other information in the catalogue. No warranty, express or implied, is given that the information provided in this catalogue is error free. We try to ensure that colours and dimensions are correct at time of print, but these are given for guidance and comparison only and are subject to change without notice. Some of our products are handmade and are therefore subject to natural variation in colour and appearance. As a process of continual improvement, we reserve the right to amend and change the specification of products without notice. Prior to making any structural changes, please ensure physical confirmation of correct dimensions.

All exterior products are covered by our guarantee. Unless specifically defined as high quality marine grade stainless steel, these guarantees are null and void if the products are installed or stored within or near a marine or sea and coastal environments or where there is salt, fertilisers and/or chemical pollution in the environment.

Full terms and conditions available upon request.

Quality statement

Our company is committed to achieving great customer satisfaction by always putting our customers at the heart of everything we do. We are continually developing our systems and processes with the ultimate aim of getting it 'right first time, every time'.

Outdoor lighting

Our cast aluminium, stainless steel and nylon fibre products have a 2 year guarantee against corrosion. These guarantees are null and void if products are installed where there is salt, fertilisers and/or chemical pollution in the air or have been sprayed with chemical cleaners and the product has not been maintained.

Dimmer switches

If your product is dimmable and requires a third party dimmer switch, compatibility is not guaranteed with all Saxby products. For further advice, please contact a qualified electrician or the manufacturer of the dimmer switch you intend to use. Do not use dimmer switches for tubular fluorescent lamps or energy efficient replacement compact fluorescent lamps. The dimmer switch will eventually burn out if used for these applications!

Products incorporating LEDs - A lot of our LED lamps and fittings can now be dimmed and we would recommend using a specific LED dimmer switch. Please verify with us that the product can be dimmed before consulting a qualified electrician or dimmer manufacturer for correct selection of dimmer switch.

Products incorporating Integral Low Voltage Electronic Transformers (G4 halogen lamps) - We do not generally recommend dimming these products, but if dimming is necessary, then a specialised dimmer switch may be required. Please verify with us that the product can be dimmed before consulting a qualified electrician or dimmer manufacturer for correct selection of dimmer switch.

Products Using Mains Voltage Halogen Bulbs (GU10, G9, ECO halogens and Linear Halogen Lamps) - Dimmer switches must not be overloaded. Some dimmer switches are designed to run warm and it is quite usual for the front plate to reach temperatures of approximately 50° Celsius during normal operation. When using halogen lamps make sure that the dimmer is rated at least twice the total wattage of the lamps to be dimmed, e.g. if using 3 x 50W GU10 halogen (150W), then make sure the dimmer is rated at 300W. See table below:

| Maximum Load on Dimmer Switch Label | Maximum Load for Mains Halogen |
|-------------------------------------|--------------------------------|
| 300W | 150W |
| 500W | 250W |
| 1000W | 500W |

It is also quite normal to hear a slight buzzing sound coming from the dimmer switch in operation

Product Code Index

| | |
|-----------|-----|
| ■ 10400 | 116 |
| ■ 10401 | 115 |
| ■ 11141 | 112 |
| ■ 12421 | 144 |
| ■ 13758 | 151 |
| ■ 13759 | 148 |
| ■ 13760 | 147 |
| ■ 13797 | 162 |
| ■ 13798 | 177 |
| ■ 13799 | 177 |
| ■ 13801 | 162 |
| ■ 13802 | 162 |
| ■ 13822 | 206 |
| ■ 13889 | 237 |
| ■ 13890 | 237 |
| ■ 13914 | 162 |
| ■ 13915 | 190 |
| ■ 13921 | 176 |
| ■ 13922 | 176 |
| ■ 13923 | 176 |
| ■ 13924 | 201 |
| ■ 13928 | 179 |
| ■ 13929 | 179 |
| ■ 14015 | 166 |
| ■ 14016 | 166 |
| ■ 14017 | 166 |
| ■ 14018 | 167 |
| ■ 1818PIR | 202 |
| ■ 1818S | 202 |
| ■ 28679 | 143 |
| ■ 34200 | 140 |
| ■ 34483 | 140 |
| ■ 35612 | 141 |
| ■ 39148 | 159 |
| ■ 39166 | 138 |
| ■ 39167 | 138 |
| ■ 39168 | 138 |
| ■ 39237 | 152 |
| ■ 39363 | 154 |
| ■ 39608 | 142 |
| ■ 39627 | 154 |
| ■ 39629 | 141 |
| ■ 39913 | 158 |
| ■ 3TH113W | 92 |
| ■ 3TH139W | 90 |
| ■ 3TRAWI | 86 |
| ■ 3TRAWIS | 87 |
| ■ 3TRAWL | 87 |
| ■ 3TRAWP | 87 |
| ■ 42315 | 91 |
| ■ 42316 | 91 |
| ■ 43277 | 96 |
| ■ 43278 | 97 |
| ■ 43279 | 96 |
| ■ 43281 | 96 |
| ■ 43282 | 97 |
| ■ 43283 | 96 |
| ■ 43655 | 190 |
| ■ 43810 | 280 |
| ■ 43816 | 281 |
| ■ 4478182 | 199 |
| ■ 4479782 | 199 |
| ■ 46395 | 110 |
| ■ 46896 | 281 |
| ■ 46897 | 281 |
| ■ 47989 | 280 |
| ■ 48024 | 92 |
| ■ 48025 | 92 |
| ■ 48739 | 220 |
| ■ 48740 | 220 |
| ■ 48869 | 31 |
| ■ 49145 | 86 |

Product Code Index

| | |
|---------|-----------------|
| ■ 49909 | 175 |
| ■ 49910 | 175 |
| ■ 49911 | 175 |
| ■ 49945 | 200 |
| ■ 49946 | 200 |
| ■ 50005 | 41 |
| ■ 50006 | 41 |
| ■ 50605 | 111 |
| ■ 50606 | 111 |
| ■ 50673 | 24 |
| ■ 50674 | 24 |
| ■ 50681 | 24 |
| ■ 50682 | 24 |
| ■ 50686 | 25 |
| ■ 50688 | 25 |
| ■ 51918 | 126 |
| ■ 52211 | 242 |
| ■ 52212 | 242 |
| ■ 52213 | 228 |
| ■ 52305 | 129 |
| ■ 52306 | 129 |
| ■ 52329 | 28 |
| ■ 52330 | 28 |
| ■ 52331 | 28 |
| ■ 52332 | 28 |
| ■ 52333 | 28 |
| ■ 52334 | 28 |
| ■ 52403 | 33 |
| ■ 52404 | 33 |
| ■ 52405 | 33 |
| ■ 52407 | 32 |
| ■ 52408 | 32 |
| ■ 52409 | 32 |
| ■ 52485 | 30 |
| ■ 53803 | 198 |
| ■ 54413 | 283 |
| ■ 54414 | 284 |
| ■ 54415 | 283 |
| ■ 54479 | 145 |
| ■ 54487 | 145 |
| ■ 54553 | 203 |
| ■ 54554 | 203 |
| ■ 54555 | 205 |
| ■ 54556 | 205 |
| ■ 54675 | 144 |
| ■ 54676 | 144 |
| ■ 54759 | 39, 45, 47, 260 |
| ■ 55591 | 109 |
| ■ 55592 | 109 |
| ■ 55595 | 113 |
| ■ 55689 | 218 |
| ■ 55690 | 218 |
| ■ 55691 | 218 |
| ■ 55692 | 218 |
| ■ 55718 | 196 |
| ■ 55720 | 196 |
| ■ 59136 | 236 |
| ■ 59137 | 236 |
| ■ 59138 | 236 |
| ■ 59850 | 144 |
| ■ 59995 | 50 |
| ■ 59996 | 50 |
| ■ 60894 | 153 |
| ■ 60895 | 149 |
| ■ 60899 | 146 |
| ■ 60965 | 204 |
| ■ 60991 | 97 |
| ■ 60992 | 97 |
| ■ 60993 | 97 |
| ■ 60995 | 97 |
| ■ 60997 | 96 |
| ■ 60998 | 96 |

Product Code Index

| | |
|---------|-----|
| ■ 60999 | 97 |
| ■ 61000 | 98 |
| ■ 61001 | 98 |
| ■ 61002 | 98 |
| ■ 61003 | 98 |
| ■ 61004 | 171 |
| ■ 61005 | 171 |
| ■ 61006 | 171 |
| ■ 61007 | 171 |
| ■ 61059 | 24 |
| ■ 61060 | 24 |
| ■ 61061 | 25 |
| ■ 61096 | 197 |
| ■ 61211 | 230 |
| ■ 61214 | 230 |
| ■ 61218 | 230 |
| ■ 61219 | 230 |
| ■ 61220 | 230 |
| ■ 61241 | 197 |
| ■ 61514 | 287 |
| ■ 61515 | 287 |
| ■ 61522 | 89 |
| ■ 61635 | 117 |
| ■ 61636 | 115 |
| ■ 61638 | 114 |
| ■ 61639 | 114 |
| ■ 61640 | 117 |
| ■ 61646 | 214 |
| ■ 61647 | 214 |
| ■ 61648 | 214 |
| ■ 61649 | 214 |
| ■ 61650 | 214 |
| ■ 61651 | 214 |
| ■ 61652 | 215 |
| ■ 61653 | 215 |
| ■ 61657 | 122 |
| ■ 61658 | 122 |
| ■ 61659 | 122 |
| ■ 61660 | 122 |
| ■ 61671 | 221 |
| ■ 61865 | 193 |
| ■ 61866 | 193 |
| ■ 62168 | 82 |
| ■ 64744 | 193 |
| ■ 64745 | 193 |
| ■ 67176 | 216 |
| ■ 67177 | 216 |
| ■ 67345 | 286 |
| ■ 67346 | 285 |
| ■ 67360 | 238 |
| ■ 67361 | 239 |
| ■ 67405 | 244 |
| ■ 67406 | 244 |
| ■ 67602 | 226 |
| ■ 67603 | 227 |
| ■ 67685 | 191 |
| ■ 67686 | 191 |
| ■ 67687 | 191 |
| ■ 67695 | 192 |
| ■ 67696 | 192 |
| ■ 67697 | 182 |
| ■ 67698 | 182 |
| ■ 67699 | 182 |
| ■ 67700 | 182 |
| ■ 67701 | 180 |
| ■ 67702 | 180 |
| ■ 67703 | 180 |
| ■ 67704 | 180 |
| ■ 68930 | 157 |
| ■ 69231 | 214 |
| ■ 69232 | 214 |

Product Code Index

| | |
|---------|-----|
| ■ 69233 | 214 |
| ■ 69500 | 123 |
| ■ 69880 | 19 |
| ■ 69881 | 19 |
| ■ 69882 | 19 |
| ■ 69883 | 19 |
| ■ 69884 | 19 |
| ■ 69885 | 19 |
| ■ 70059 | 272 |
| ■ 70060 | 272 |
| ■ 70064 | 271 |
| ■ 70065 | 271 |
| ■ 70257 | 265 |
| ■ 70258 | 265 |
| ■ 70417 | 30 |
| ■ 70418 | 30 |
| ■ 70443 | 157 |
| ■ 70448 | 82 |
| ■ 70449 | 82 |
| ■ 70450 | 82 |
| ■ 70470 | 286 |
| ■ 70471 | 285 |
| ■ 70565 | 108 |
| ■ 70847 | 167 |
| ■ 70848 | 167 |
| ■ 71210 | 20 |
| ■ 71512 | 20 |
| ■ 71515 | 20 |
| ■ 71539 | 245 |
| ■ 71540 | 245 |
| ■ 71553 | 235 |
| ■ 71554 | 235 |
| ■ 71886 | 92 |
| ■ 71888 | 87 |
| ■ 71889 | 86 |
| ■ 71890 | 87 |
| ■ 71891 | 87 |
| ■ 71892 | 86 |
| ■ 71893 | 86 |
| ■ 71894 | 87 |
| ■ 71895 | 87 |
| ■ 71896 | 86 |
| ■ 71899 | 91 |
| ■ 72180 | 215 |
| ■ 72181 | 215 |
| ■ 72360 | 150 |
| ■ 72364 | 58 |
| ■ 72365 | 58 |
| ■ 72366 | 58 |
| ■ 72367 | 58 |
| ■ 72368 | 58 |
| ■ 72369 | 58 |
| ■ 72370 | 59 |
| ■ 72371 | 59 |
| ■ 72372 | 59 |
| ■ 72373 | 59 |
| ■ 72374 | 59 |
| ■ 72375 | 59 |
| ■ 72381 | 172 |
| ■ 72384 | 173 |
| ■ 72385 | 173 |
| ■ 72456 | 142 |
| ■ 72457 | 143 |
| ■ 72547 | 272 |
| ■ 72636 | 250 |
| ■ 72637 | 250 |
| ■ 72638 | 250 |
| ■ 72639 | 250 |
| ■ 72640 | 251 |
| ■ 72641 | 254 |
| ■ 72642 | 259 |
| ■ 72643 | 258 |

Product Code Index

| | |
|---------|-----|
| ■ 72644 | 253 |
| ■ 72700 | 62 |
| ■ 72701 | 62 |
| ■ 72702 | 62 |
| ■ 72703 | 62 |
| ■ 72704 | 62 |
| ■ 72705 | 62 |
| ■ 72706 | 63 |
| ■ 72707 | 63 |
| ■ 72708 | 63 |
| ■ 72709 | 63 |
| ■ 72710 | 63 |
| ■ 72711 | 63 |
| ■ 72718 | 92 |
| ■ 72720 | 87 |
| ■ 72721 | 86 |
| ■ 72722 | 87 |
| ■ 72723 | 87 |
| ■ 72724 | 86 |
| ■ 72725 | 86 |
| ■ 72726 | 87 |
| ■ 72727 | 87 |
| ■ 72728 | 86 |
| ■ 72913 | 174 |
| ■ 72914 | 174 |
| ■ 72915 | 174 |
| ■ 72916 | 174 |
| ■ 73256 | 268 |
| ■ 73257 | 268 |
| ■ 73347 | 234 |
| ■ 73348 | 234 |
| ■ 73349 | 234 |
| ■ 73352 | 66 |
| ■ 73435 | 207 |
| ■ 73436 | 207 |
| ■ 73437 | 207 |
| ■ 73445 | 166 |
| ■ 73446 | 166 |
| ■ 73451 | 208 |
| ■ 73452 | 209 |
| ■ 73453 | 208 |
| ■ 73454 | 209 |
| ■ 73455 | 208 |
| ■ 73456 | 209 |
| ■ 73457 | 208 |
| ■ 73458 | 209 |
| ■ 73459 | 208 |
| ■ 73460 | 209 |
| ■ 73461 | 208 |
| ■ 73462 | 209 |
| ■ 73463 | 238 |
| ■ 73464 | 239 |
| ■ 73534 | 54 |
| ■ 73536 | 60 |
| ■ 73666 | 128 |
| ■ 73667 | 127 |
| ■ 73668 | 124 |
| ■ 73669 | 126 |
| ■ 73671 | 135 |
| ■ 73684 | 102 |
| ■ 73685 | 102 |
| ■ 73686 | 102 |
| ■ 73687 | 102 |
| ■ 73688 | 102 |
| ■ 73689 | 102 |
| ■ 73710 | 125 |
| ■ 73711 | 125 |
| ■ 73716 | 220 |
| ■ 73717 | 220 |
| ■ 73719 | 39 |
| ■ 73720 | 39 |
| ■ 73785 | 14 |

Product Code Index

| | |
|---------|---------|
| ■ 73786 | 14 |
| ■ 73787 | 14 |
| ■ 73788 | 14 |
| ■ 73796 | 252 |
| ■ 73810 | 39 |
| ■ 73811 | 39 |
| ■ 73812 | 39 |
| ■ 73813 | 39 |
| ■ 74031 | 14 |
| ■ 74032 | 14 |
| ■ 74045 | 265 |
| ■ 74707 | 15 |
| ■ 74708 | 15 |
| ■ 74709 | 15 |
| ■ 74710 | 15 |
| ■ 74711 | 15 |
| ■ 74712 | 15 |
| ■ 74767 | 80 |
| ■ 74768 | 80 |
| ■ 74824 | 74 |
| ■ 74825 | 74 |
| ■ 74826 | 74 |
| ■ 74827 | 74 |
| ■ 74828 | 75 |
| ■ 74829 | 75 |
| ■ 74831 | 75 |
| ■ 74832 | 75 |
| ■ 74833 | 75 |
| ■ 74839 | 75 |
| ■ 75021 | 282 |
| ■ 75145 | 45 |
| ■ 75270 | 188 |
| ■ 75271 | 188 |
| ■ 75272 | 188 |
| ■ 75429 | 166 |
| ■ 75430 | 162 |
| ■ 75431 | 162 |
| ■ 75432 | 164 |
| ■ 75433 | 164 |
| ■ 75434 | 164 |
| ■ 75435 | 164 |
| ■ 75436 | 164 |
| ■ 75437 | 164 |
| ■ 75438 | 164 |
| ■ 75439 | 165 |
| ■ 75440 | 165 |
| ■ 75441 | 165 |
| ■ 75442 | 165 |
| ■ 75443 | 165 |
| ■ 75444 | 165 |
| ■ 75448 | 163 |
| ■ 75449 | 163 |
| ■ 75486 | 45, 261 |
| ■ 75505 | 44 |
| ■ 75506 | 44 |
| ■ 75507 | 44 |
| ■ 75509 | 44 |
| ■ 75512 | 44 |
| ■ 75515 | 44 |
| ■ 75518 | 46 |
| ■ 75519 | 46 |
| ■ 75520 | 46 |
| ■ 75521 | 46 |
| ■ 75527 | 226 |
| ■ 75528 | 225 |
| ■ 75531 | 61 |
| ■ 75532 | 61 |
| ■ 75533 | 61 |
| ■ 75534 | 61 |
| ■ 75535 | 86 |
| ■ 75536 | 87 |
| ■ 75537 | 87 |

Product Code Index

| | |
|-------|-----|
| 75538 | 86 |
| 75550 | 100 |
| 75551 | 100 |
| 75553 | 100 |
| 75917 | 26 |
| 75921 | 123 |
| 75922 | 123 |
| 75923 | 123 |
| 75924 | 123 |
| 75925 | 120 |
| 75926 | 120 |
| 75927 | 121 |
| 75928 | 121 |
| 75930 | 189 |
| 75931 | 189 |
| 76006 | 28 |
| 76007 | 28 |
| 76139 | 270 |
| 76140 | 270 |
| 76383 | 256 |
| 76384 | 256 |
| 76615 | 234 |
| 76616 | 234 |
| 76617 | 234 |
| 76645 | 99 |
| 76656 | 156 |
| 76657 | 155 |
| 76658 | 155 |
| 76768 | 255 |
| 76790 | 270 |
| 76791 | 270 |
| 76792 | 270 |
| 76793 | 269 |
| 76794 | 269 |
| 76795 | 265 |
| 76796 | 265 |
| 76797 | 277 |
| 76798 | 277 |
| 76799 | 275 |
| 76800 | 273 |
| 76801 | 276 |
| 76802 | 276 |
| 76803 | 276 |
| 76804 | 277 |
| 76805 | 277 |
| 76806 | 275 |
| 76807 | 273 |
| 76925 | 186 |
| 76926 | 186 |
| 76927 | 187 |
| 77892 | 76 |
| 77893 | 76 |
| 77895 | 76 |
| 77896 | 76 |
| 77897 | 78 |
| 77898 | 78 |
| 77899 | 78 |
| 77900 | 78 |
| 77901 | 78 |
| 77902 | 78 |
| 77903 | 78 |
| 77904 | 79 |
| 77905 | 79 |
| 77907 | 79 |
| 77908 | 79 |
| 77909 | 79 |
| 77910 | 79 |
| 77911 | 79 |
| 77912 | 79 |
| 77913 | 79 |
| 77914 | 217 |
| 77915 | 217 |

Product Code Index

| | |
|-------|--------|
| 77916 | 217 |
| 78263 | 40 |
| 78286 | 79 |
| 78483 | 48 |
| 78485 | 29 |
| 78486 | 29 |
| 78519 | 17 |
| 78520 | 16 |
| 78521 | 16 |
| 78522 | 16 |
| 78523 | 16 |
| 78524 | 16 |
| 78525 | 16 |
| 78529 | 26 |
| 78530 | 32 |
| 78531 | 32 |
| 78532 | 32 |
| 78533 | 34 |
| 78534 | 34 |
| 78535 | 34 |
| 78536 | 34 |
| 78537 | 36 |
| 78538 | 36 |
| 78540 | 36 |
| 78541 | 38 |
| 78542 | 37 |
| 78543 | 35 |
| 78544 | 35 |
| 78546 | 47 |
| 78547 | 49 |
| 78548 | 55 |
| 78549 | 55 |
| 78550 | 55 |
| 78551 | 55 |
| 78552 | 55 |
| 78553 | 55 |
| 78554 | 56 |
| 78555 | 56 |
| 78556 | 56 |
| 78557 | 56 |
| 78558 | 56 |
| 78559 | 56 |
| 78560 | 57 |
| 78561 | 57 |
| 78562 | 57 |
| 78563 | 57 |
| 78564 | 57 |
| 78565 | 57 |
| 78566 | 64 |
| 78567 | 64 |
| 78569 | 64 |
| 78570 | 64 |
| 78573 | 68 |
| 78574 | 68 |
| 78575 | 68 |
| 78576 | 69, 71 |
| 78577 | 69, 71 |
| 78578 | 71 |
| 78579 | 71 |
| 78580 | 70-71 |
| 78581 | 72 |
| 78582 | 72 |
| 78583 | 72 |
| 78584 | 72 |
| 78585 | 83 |
| 78586 | 83 |
| 78607 | 219 |
| 78608 | 219 |
| 78609 | 219 |
| 78610 | 219 |
| 78616 | 203 |
| 78617 | 205 |

Product Code Index

| | |
|---------|-------------|
| ■ 78618 | 205 |
| ■ 78620 | 222 |
| ■ 78621 | 223 |
| ■ 78622 | 224 |
| ■ 78623 | 224 |
| ■ 78635 | 245 |
| ■ 78636 | 245 |
| ■ 78637 | 226 |
| ■ 78638 | 227 |
| ■ 78639 | 226 |
| ■ 78640 | 227 |
| ■ 78641 | 226-227 |
| ■ 78644 | 227 |
| ■ 78645 | 225 |
| ■ 78646 | 240 |
| ■ 78647 | 240 |
| ■ 78649 | 92 |
| ■ 78650 | 90 |
| ■ 78651 | 90 |
| ■ 78654 | 84 |
| ■ 78655 | 84 |
| ■ 78656 | 84 |
| ■ 78657 | 84 |
| ■ 78658 | 84 |
| ■ 78659 | 84 |
| ■ 78660 | 84 |
| ■ 78661 | 84 |
| ■ 78662 | 84 |
| ■ 78667 | 168 |
| ■ 78752 | 70-71 |
| ■ 78753 | 70-71 |
| ■ 78757 | 198 |
| ■ 78774 | 71 |
| ■ 78845 | 222 |
| ■ 78846 | 222 |
| ■ 78847 | 222 |
| ■ 78848 | 223 |
| ■ 78849 | 223 |
| ■ 78850 | 223 |
| ■ 78851 | 224 |
| ■ 78852 | 224 |
| ■ 78853 | 224 |
| ■ 78856 | 266 |
| ■ 78857 | 266 |
| ■ 78858 | 266 |
| ■ 78859 | 267 |
| ■ 78860 | 267 |
| ■ 78861 | 267 |
| ■ 78862 | 267 |
| ■ 78863 | 267 |
| ■ 78864 | 267 |
| ■ 78954 | 27 |
| ■ 78955 | 27 |
| ■ 78956 | 55, 64, 278 |
| ■ 78957 | 55, 64, 278 |
| ■ 78959 | 88 |
| ■ 78960 | 88 |
| ■ 78961 | 88 |
| ■ 78962 | 210 |
| ■ 78963 | 210-211 |
| ■ 78964 | 210 |
| ■ 78965 | 211 |
| ■ 78966 | 210 |
| ■ 78967 | 211 |
| ■ 78968 | 210 |
| ■ 78969 | 211 |
| ■ 78970 | 210 |
| ■ 78971 | 213 |
| ■ 78972 | 213 |
| ■ 78973 | 213 |
| ■ 78977 | 51 |
| ■ 78978 | 52 |

Product Code Index

| | |
|----------|----------|
| ■ 79191 | 52 |
| ■ 79192 | 246 |
| ■ 79193 | 232 |
| ■ 79194 | 232 |
| ■ 79195 | 241 |
| ■ 79196 | 194 |
| ■ 79197 | 178 |
| ■ 79198 | 178 |
| ■ 79199 | 178 |
| ■ 79200 | 185 |
| ■ 79201 | 185 |
| ■ 79202 | 185 |
| ■ 79203 | 183 |
| ■ 79204 | 183 |
| ■ 79205 | 183 |
| ■ 79206 | 183 |
| ■ 79207 | 181 |
| ■ 79208 | 181 |
| ■ 79209 | 181 |
| ■ 79216 | 86 |
| ■ 79217 | 86 |
| ■ 79218 | 86 |
| ■ 79219 | 85 |
| ■ 79303 | 85 |
| ■ 79305 | 21 |
| ■ 79306 | 81 |
| ■ 79307 | 81 |
| ■ 79308 | 264 |
| ■ 79309 | 274 |
| ■ 79315 | 131 |
| ■ 79316 | 131 |
| ■ 79317 | 130 |
| ■ 79318 | 130 |
| ■ 79319 | 133 |
| ■ 79320 | 133 |
| ■ 79321 | 133 |
| ■ 79322 | 133 |
| ■ 79323 | 133 |
| ■ 79324 | 132 |
| ■ 79325 | 132 |
| ■ 79326 | 132 |
| ■ 79327 | 132 |
| ■ 79328 | 134, 280 |
| ■ 79329 | 134, 280 |
| ■ 79330 | 134, 280 |
| ■ 79331 | 134, 280 |
| ■ 79332 | 134, 280 |
| ■ 79333 | 134, 280 |
| ■ 79334 | 134, 280 |
| ■ 79335 | 280 |
| ■ 79397 | 71 |
| ■ 79681 | 134, 280 |
| ■ 79682 | 134, 280 |
| ■ 79977 | 75 |
| ■ 79978 | 22 |
| ■ 79979 | 22 |
| ■ 79980 | 22 |
| ■ 80085 | 48 |
| ■ 80086 | 49 |
| ■ 80244 | 22 |
| ■ 80245 | 22 |
| ■ 80246 | 22 |
| ■ 80247 | 23 |
| ■ 80248 | 23 |
| ■ 80497 | 135 |
| ■ 80498 | 135 |
| ■ 80499 | 135 |
| ■ 80500 | 135 |
| ■ 80501 | 135 |
| ■ 80513 | 44 |
| ■ 811-SC | 100 |
| ■ 813-SC | 100 |

Product Code Index

| | |
|------------|-----|
| 814-SC | 100 |
| CH200E27BK | 173 |
| CH201E27BK | 173 |
| EL-10047 | 105 |
| EL-10081 | 107 |
| EL-10085 | 107 |
| EL-40045 | 204 |
| EL-40053 | 170 |
| EL-40054 | 170 |
| EL-40074 | 184 |
| EL-40075 | 184 |
| EL-40076 | 184 |
| EL-40088 | 197 |
| EL-40103 | 231 |
| EL-40104 | 231 |
| EL-40106 | 231 |
| EL-40107 | 231 |
| EL-40108 | 231 |
| EL-40114 | 203 |
| EL-40115 | 203 |
| EL-40116 | 203 |
| EL-40122 | 170 |
| EL-40123 | 170 |
| ET60R | 279 |
| FH150 | 41 |
| G2521013 | 96 |
| G2521313 | 97 |
| G2523413 | 96 |
| G5501077 | 104 |
| G5503177 | 104 |
| G5503477 | 104 |
| GH88042V | 243 |
| GH98042V | 243 |
| LHGU10 | 40 |
| LHGU53 | 40 |
| OD51004 | 108 |
| OL60AB | 228 |
| POLGU10 | 247 |
| ST031F | 189 |
| ST031FPIR | 189 |
| ST5008BK | 168 |
| ST5008S | 168 |
| ST5008W | 168 |
| ST5009BK | 168 |
| ST5009SS | 168 |
| ST5009W | 168 |
| ST5010S | 168 |
| ST5010W | 168 |
| ST5011 | 169 |
| YG-6001-SS | 172 |
| YG-6002-SS | 172 |
| YG-6003-SS | 172 |

Product Name Index

| | | | |
|----------------------|---------|------------------------------|-----------------|
| 12V transformer | 279 | Convesso | 159 |
| Altum | 68-71 | Cora | 89 |
| Amalfi | 96-99 | Cove | 238 |
| Amphi | 35 | Crescent | 115 |
| Aqualine CCT kit | 124 | Crystal | 141 |
| Aqualine kit | 125 | Cubita | 143 |
| Aqualine RGB kit | 126 | Cyclo 2 | 256 |
| Aqualine 12V premium | 126 | Deyes | 49 |
| Arezzo | 102 | Dimmer Module | 282 |
| Arlow | 185 | Dome LED | 207 |
| Atlantis | 166-167 | Doron | 190 |
| Avit | 221 | E14 LED candle | 277 |
| Axial Round | 36 | E14 LED filament candle | 277 |
| Axial Rectangular | 37 | E14 LED filament golf | 277 |
| Axis | 155 | E14 LED golf | 277 |
| Ayoka | 244 | E27 LED filament globe | 276 |
| B22 LED filament GLS | 273 | E27 LED filament GLS | 275 |
| B22 LED GLS | 273 | E27 LED filament pear | 276 |
| Bayswater | 204 | E27 LED GLS | 275 |
| Bianco | 189 | E27 Smart | 274 |
| Blaine | 48 | Eco | 228 |
| Bliss | 177 | EcoLinear | 54 |
| Bodenn | 240 | Emergency LED conversion kit | 45, 47, 260-261 |
| Borde | 50 | Equinox | 175 |
| Box | 116 | Equinox LED | 174 |
| Bretton | 198 | Evesham | 205 |
| Broco | 83 | Flexline kit | 129 |
| Bullett | 92 | Flexline CCT kit | 128 |
| Canillo | 182 | Flexline RGB kit | 127 |
| Caraway | 178 | Forca | 76-79 |
| Cast | 28 | Forca CCT | 78-79 |
| Cobra XS | 82 | G9 eco halogen | 271 |
| Cody | 85 | G9 LED SMD | 270 |
| Conor | 90 | Galexia | 51 |
| Control | 122 | Garrix | 34 |
| Converse | 30 | Glimpse | 150 |

Product Name Index

| | |
|--------------------------------|-------------|
| Glover | 194 |
| Grove | 105 |
| GU10 lampholder | 40 |
| GU10 lampholder & fast fix box | 40 |
| GU10 LED COB | 269 |
| GU10 LED SMD | 265-268 |
| GU10 Smart | 264 |
| Halbury | 203 |
| Harper | 107 |
| Hayz | 239 |
| Heatguard | 41 |
| Hera CCT | 120 |
| Hester | 232 |
| Hoxton | 241 |
| Hydra | 74-75 |
| Icarus | 170-171 |
| Ice | 154 |
| Ikon round | 237 |
| IkonPRO | 234-236 |
| Inline IP68 connector | 287 |
| Inova PIR | 200 |
| Kingsley | 52 |
| Knight | 138 |
| Krius | 100 |
| Kyle | 255 |
| Lance | 246 |
| Larkin | 183 |
| LED anti corrosive | 63 |
| LED driver constant current | 45, 281 |
| LED driver constant voltage | 134, 280 |
| LED Tube | 54, 64, 278 |
| Linear Pro | 58-59 |
| Lipco | 142 |
| Louvre | 172-173 |
| Lucca | 216 |
| Lucca Mini | 217 |
| Luik | 214-215 |
| Luminatra | 245 |
| Madison | 111 |
| Mantra | 213 |
| Mareh | 151 |
| Microwave presence detector | 66, 283 |
| Mini crescent | 115 |
| Moda | 155-156 |
| Montana | 81 |
| Montana Smart | 80 |
| Monte | 91 |
| Mordax | 62-63 |
| Mornington | 117 |
| Moro | 113 |
| Morti | 191 |
| Motion | 220 |
| MR16 lampholder | 40 |
| Nico | 146 |
| Noble | 145 |
| Nyx CCT | 121 |
| Odi | 108 |
| Odyssey | 168-169 |
| Olympia | 181 |
| Omega | 152 |
| Onan | 157 |
| Opaz MV | 247 |
| OrbitalPLUS | 19 |
| OrbitalPRO | 20 |
| Orbital Smart | 21 |
| Oreti | 192 |
| Oreti PIR | 192 |
| Oxxo | 54, 64 |
| Pacto | 29, 88 |
| Pagoda PIR | 201 |
| Palermo | 104 |
| Palin | 162-165 |

Product Name Index

| | |
|-----------------------|-----------|
| Panello | 158 |
| Peake | 31 |
| Perle | 147 |
| Pillar | 242-243 |
| Pillo | 222 |
| Pillo XL | 223 |
| PIR presence detector | 283-284 |
| PIR security detector | 285 |
| Plasma | 112 |
| Portico | 144 |
| Pure | 140 |
| Pyramid | 179 |
| R7s eco halogen | 272 |
| Reeve 2 | 60 |
| Reeve Connect | 61 |
| Regen | 130, 132 |
| Revelo | 153 |
| Rift | 149 |
| Roko | 180 |
| Rond | 224 |
| Root kit | 207 |
| Rular | 56-57 |
| Salvo | 117 |
| Scimitar | 208 |
| Scimitar PIR | 209 |
| Seina | 226-227 |
| Seina half brick | 225 |
| Sentinel | 188 |
| Seran | 218 |
| Seran Microwave | 219 |
| Severus | 230-231 |
| Shale | 110 |
| ShieldECO 500 | 14 |
| ShieldECO 500 CCT | 17 |
| ShieldECO 800 | 15 |
| ShieldECO 800 tilt | 16 |
| ShieldPLUS MV | 24-25 |
| Sight 4-in-1 | 253 |
| Sight Box | 252 |
| Sight Eco | 251 |
| Sight Plus | 250 |
| Sight Recessed | 254 |
| Sight Twin Spot | 258-259 |
| Sirio | 44-47 |
| SirioDISC Adjustable | 39 |
| SirioDISC | 38 |
| Slater | 109 |
| Sleek CCT | 123 |
| Solaris | 186-187 |
| Speculo | 22-23 |
| Spegel | 148 |
| Square | 154 |
| Stannis | 72 |
| Surge | 210-211 |
| Tango | 176 |
| Tape profile | 135 |
| Tetra | 33 |
| Toko | 114 |
| Track | 84, 86-87 |
| Traditional | 202 |
| Tribeca | 184 |
| Trimless bezel | 26 |
| Trimless Downlight | 27 |
| Trocken | 131, 133 |
| Twilight detector | 286 |
| Vulcan | 193 |
| Ware | 197 |
| Xeno | 32 |
| York | 199 |
| Zone | 206 |
| Zone LED | 207 |
| Zyra | 196 |

Saxby Lighting, Cabot Lane,
Creekmoor, Dorset BH17 7BY
T: 0333 00 333 08
F: 01202 409811
E: sales@saxbylighting.com
www.saxbylighting.com



Printed January 2019